MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BA-2RB-P4

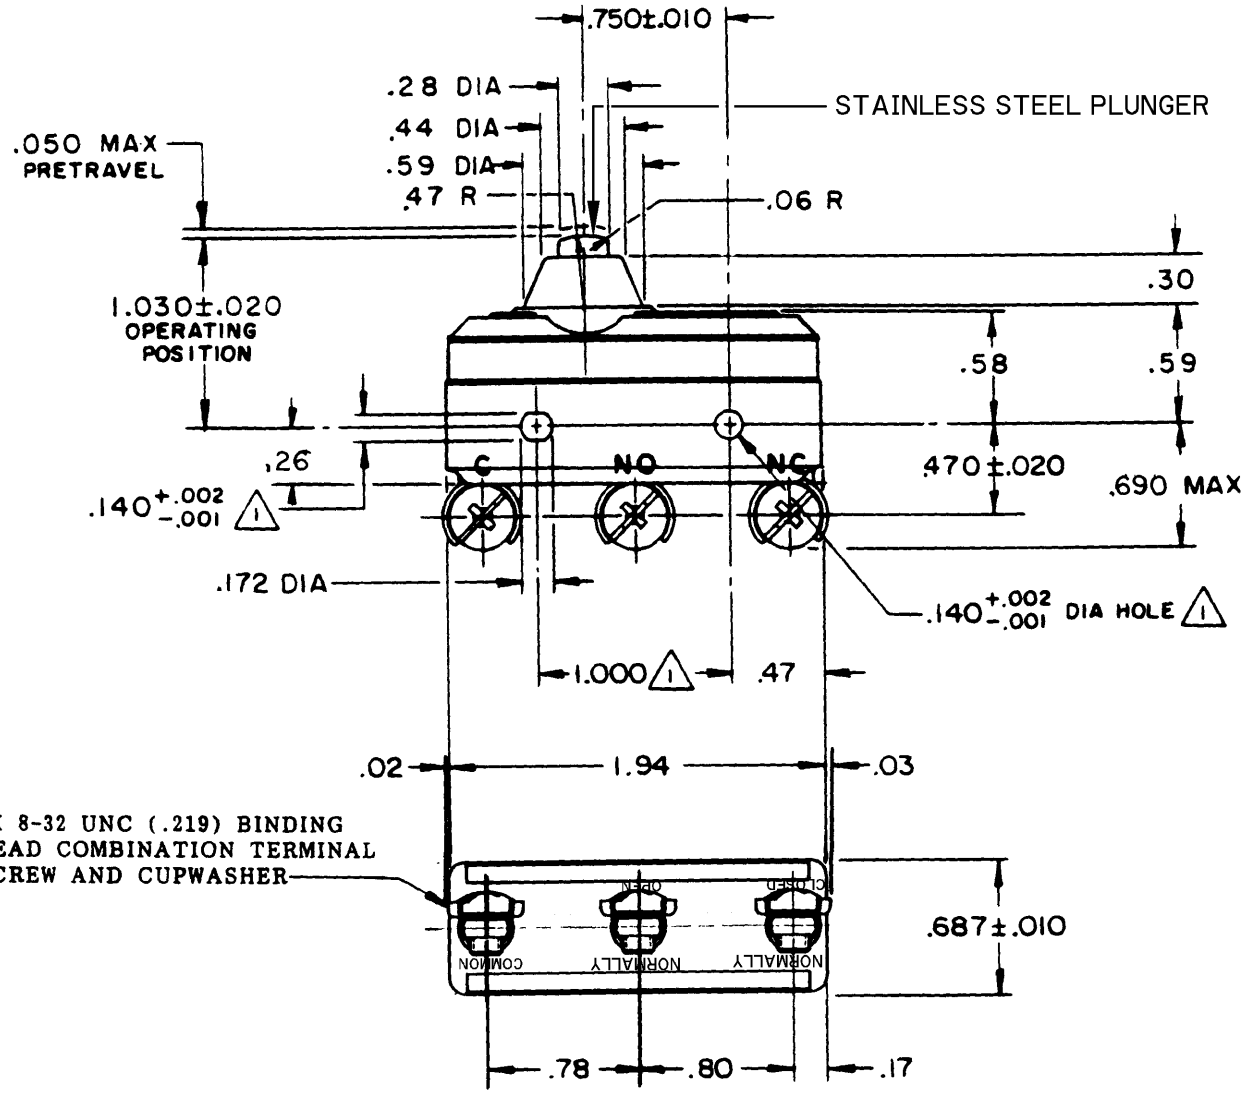

NOTE

(1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 14 - 22 OZ

RELEASE FORCE — — — — 10 OZ MIN

DIFFERENTIAL TRAVEL — — .0020 - .0075

OVERTRAVEL — — — — — .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23 UNDERWRITERS' LAB. INC. LISTED RATING
20A - 125, 250 OR 480 VAC
10A - 125 VAC "L"
1HP - 125 VAC, 2HP - 250 VAC
1/2A - 125 VDC, 1/4A - 250 VDC

L288
L299
L308

20(3)A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING M BA-2RB-P4 PAGE 1 OF 1
REPLACES
RELEASE NO.
DRAWING NUMBER
ISSUE 7

REVISIONS					
				CHECK	
A	∞ 16851	M B F 21 DEC 64			
B	CO-73267-G	J A L 20 OCT 93			
C	CO-753678	K D R 3 MAR 94			
D	CO-77863	G J W 30 APR 96		CHECK	
E	C093346	D L T 24 AUG 98		CHECK	
F	CO-95750-B	C S L 31 MAR 00			

28 DEC 64 L&D CHECK 21 DEC 64 DRAWN M B F

FORMTEK FO-30378