

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-2RB35-A2

ABK0000


CATALOG LISTING
BA-2RB35-A2
PAGE 1 OF 1
RELEASE NO. SR 8669

DRAWING NUMBER
M
ISSUE
7

REVISIONS

A	C034310	30 SEP 05
B	CO-73287-J	22 NOV 93
C	CO-77590	8 JUN 94
D	C093346	
E	CO-95750-B	
F	0015539	

RASTER
K L B 8 DEC 59
DRAWN
2-5 1378

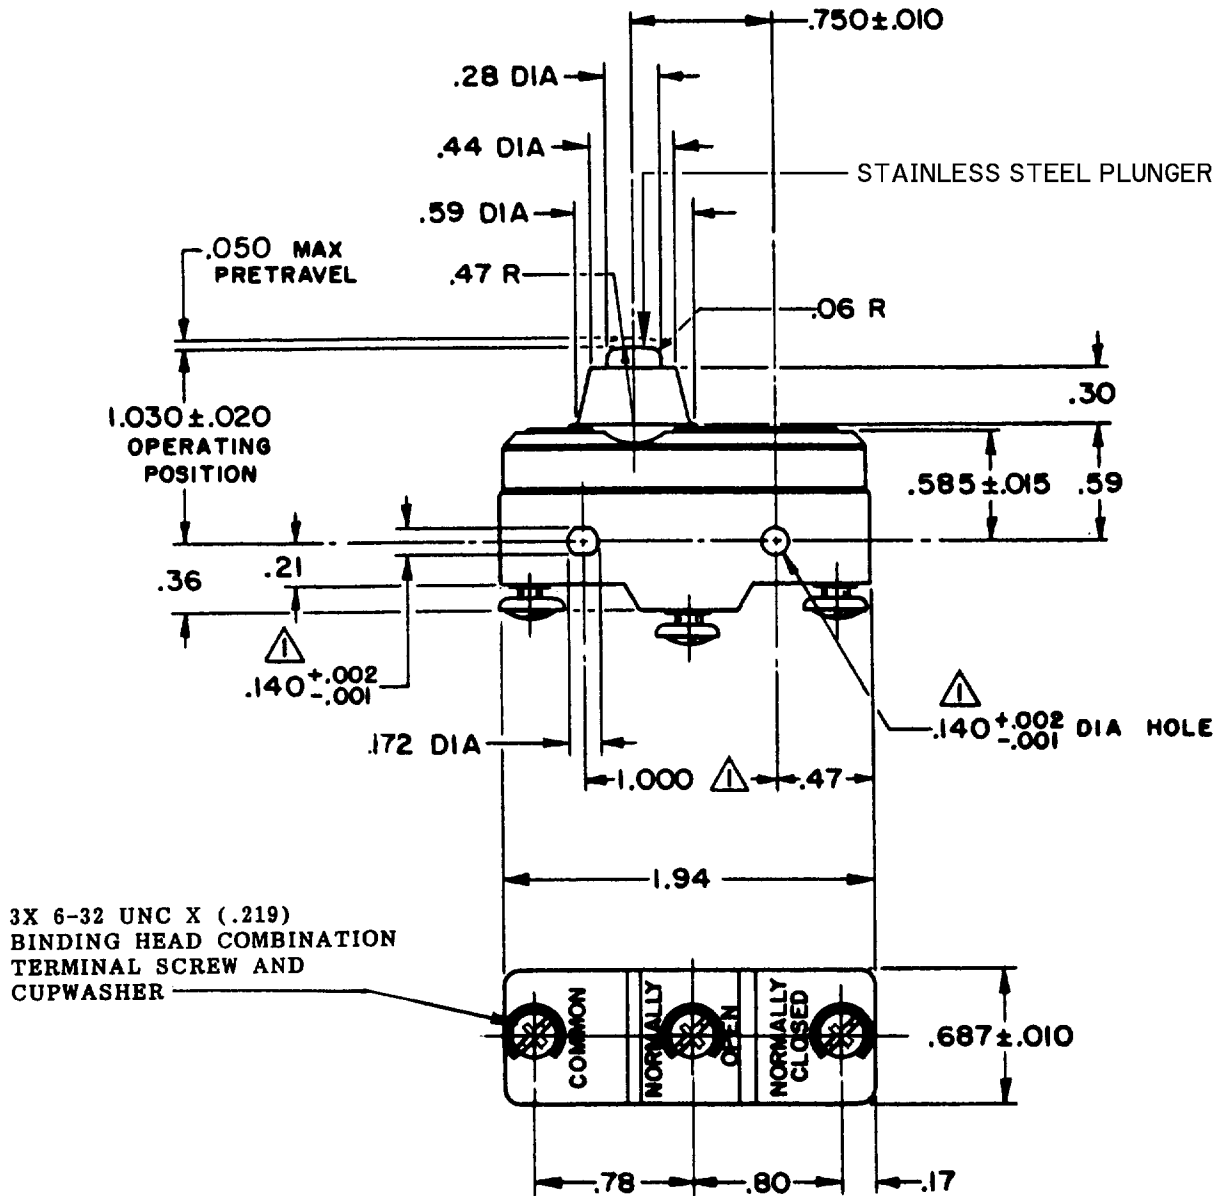

NOTE
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 12 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ MIN		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - - .002 - .0075		TOLERANCES ARE:
OVERTRAVEL - - - - - .093 MIN		ONE PLACE (.0) ± .030
		TWO PLACE (.00) ± .015
		THREE PLACE (.000) ± .005
		ANGLES ±
		WEIGHT .064 LB

-L19- 15 A 125, 250, OR 480 VAC
3/4 HP - 125 VAC, 1 1/2 HP - 250 VAC
1/2 A - 125 VDC, 1/4 A - 250 VDC

-L288-
L315

-L306-

16A 250V ~ T85 5E4

