

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FARMINGTON, CONNECTICUT

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BA-2RB7-P4

CATALOG LISTING
BA-2RB7-P4
PAGE 1 OF 1

M

ISSUE
10

REVISIONS

A	C080986	JALA	11 JUN 95
B	CO-77863	GJW	30 APR 96
C	C093346	DLT	25 AUG 98
D	CO-95750-B	CSL	31 MAR 00

REPLACES

RELEASE NO. SR9232

CHECK


CHECK

15 SEP 00

CHECK

15 SEP 60

FORMTEK

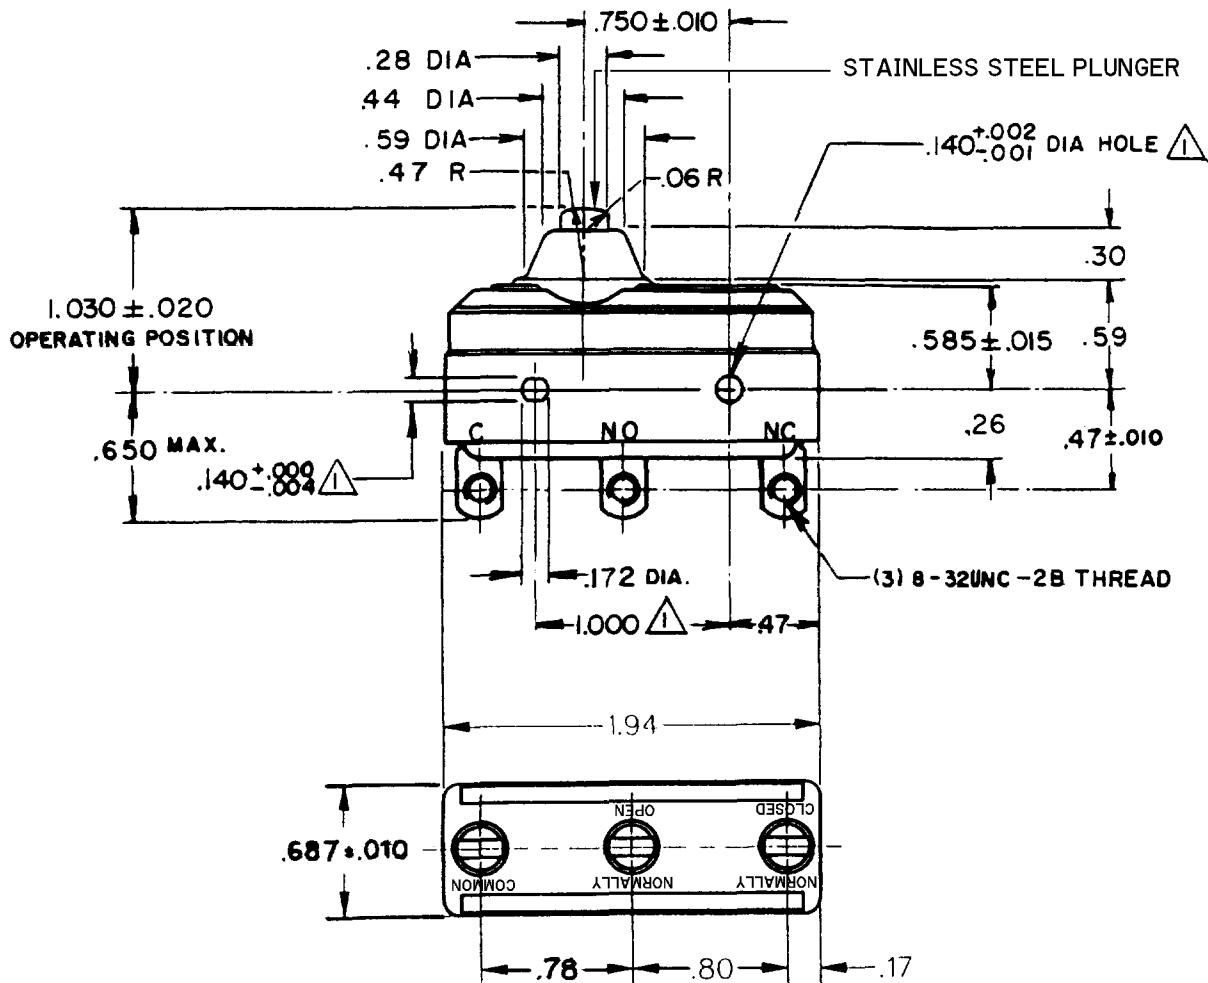

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - 3X BINDING HEAD TERMINAL SCREW AND 3X CUPWASHER FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----25 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE-----10 OZ MIN	L23 UNDERWRITERS' LAB. INC. LISTED RATING 20A - 125, 250 OR 480 VAC 10A - 125 VAC "L" 1HP - 125 VAC, 2HP - 250 VAC 1/2A - 125 VDC, 1/4A - 250 VDC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.000 TWO PLACE (.00) ±.010 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL-----.093 MIN	L288 L299 L308 CE D SP 20(3)A 250V ~ T85 5E4	WEIGHT