MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH — BASIC

CATALOG LISTING
BA-2RQ1-A2

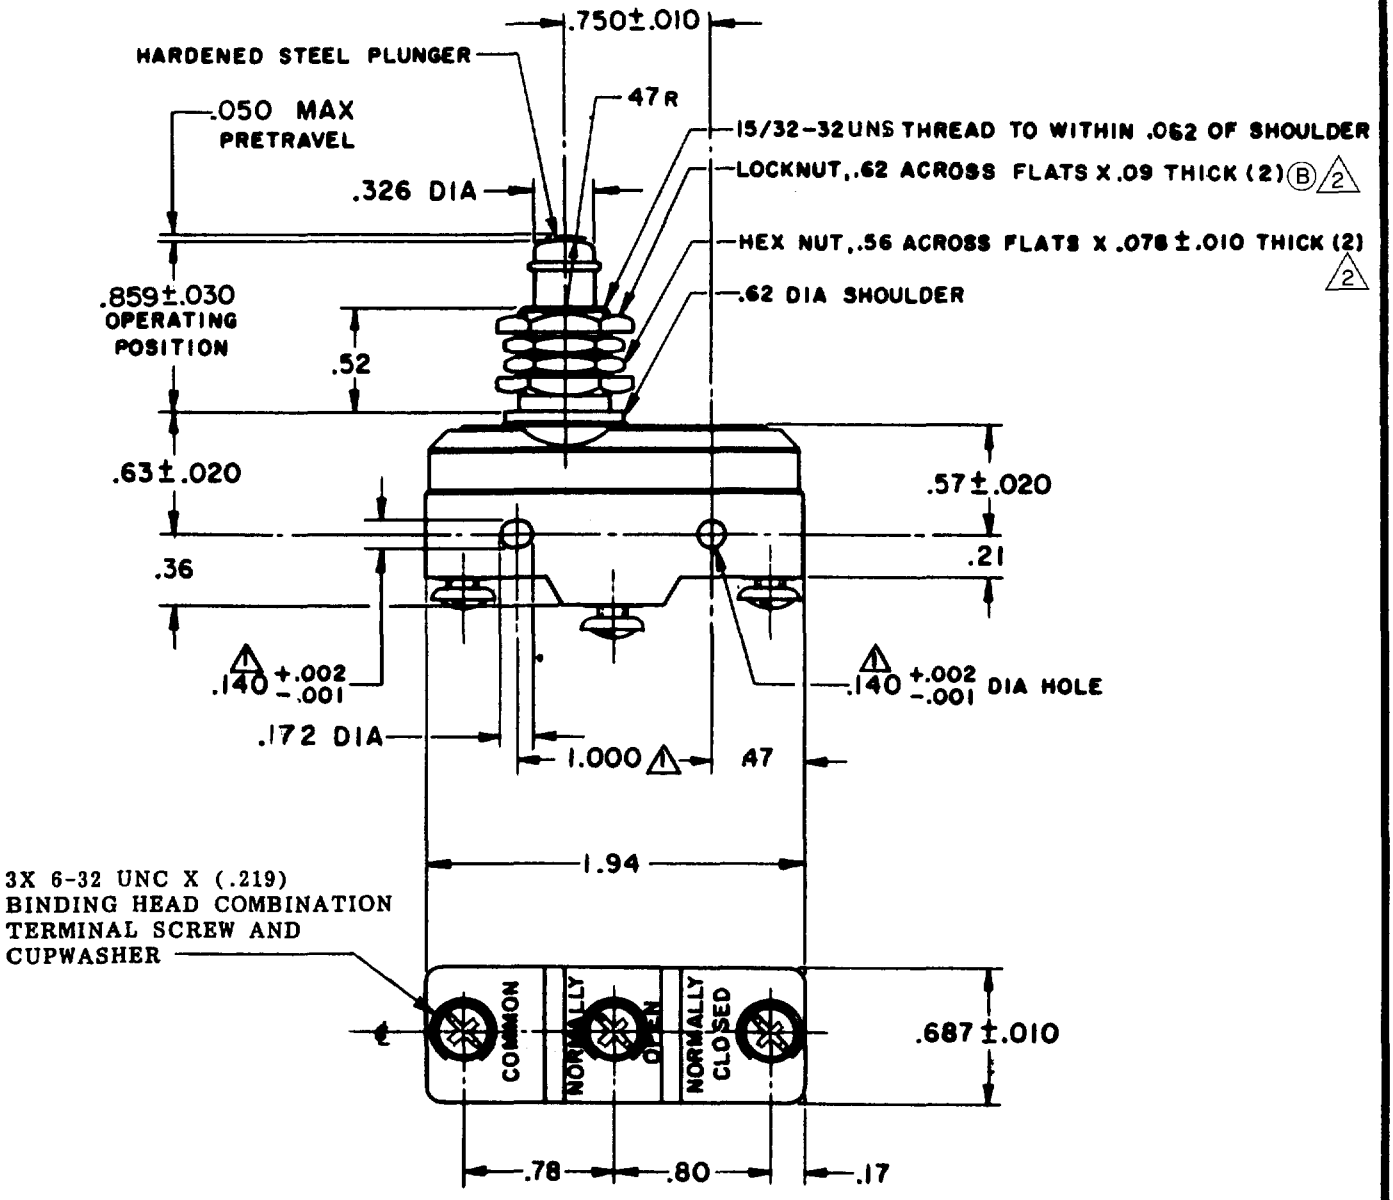

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	14–22 OZ
RELEASE FORCE	10 OZ MIN
DIFFERENTIAL TRAVEL	.002–.0075
OVERTRAVEL	.219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED – FILE E12252
20A-125, 250 OR 480 VAC; 10A-125 VAC "L"
1 1/2HP-125 VAC; 2HP-250 VAC
CODE L97 1/2A-125 VDC; 1/4A-250 VDC
L288
L299
L308
20(3)A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .093 LB

(M) BA-2RQ1-A2 ISSUE 5
REPLACES
RELEASE NO.
M BA-2RQ1-A2 PAGE 1 OF 1
DRAWING NUMBER
ISSUE 14
CHECK

REVISIONS

A	CO 9600	R.E.R. 2 MAR 59
B	CO14866	J T D 6 AUG 60
C	CO27518	L S D 26 JUN 70
D	CO57732	K P K 5 NOV 78
E	CO 48448	S L B 15 FEB 79
F	CO-73287-J	J A L 22 NOV 93
G	CO 77590	SAD 8 JUN 94
H	CO-82133	CSL 26 JUL 96
J	CO93346	DLT 4 SEP 98

CHECK
K.F.M. 3 MAR 59
CHECK
R E. R. 2 MAR 59
DRAWN
FORMTEK