

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91299

SWITCH - BASIC

CATALOG LISTING

BA-2RQ1-D5

CATALOG LISTING

BA-2RQ1-D5

PAGE 1 OF 1

RELEASE NO. PR-9613

REPLACES

CHECK

REVISIONS

A CO 77590
SAD
10 JUN 94

B CO-82133
CSL
26 JUL 96

C CO93346
DLT
25 AUG 98

D CO-94212-C
DLT
20 SEP 99

E 204583
CSL
14 DEC 01


TSM 12 DEC 80

CHECK C E D 4 DEC 80

DRAWN

FO-52848-A

RASTER

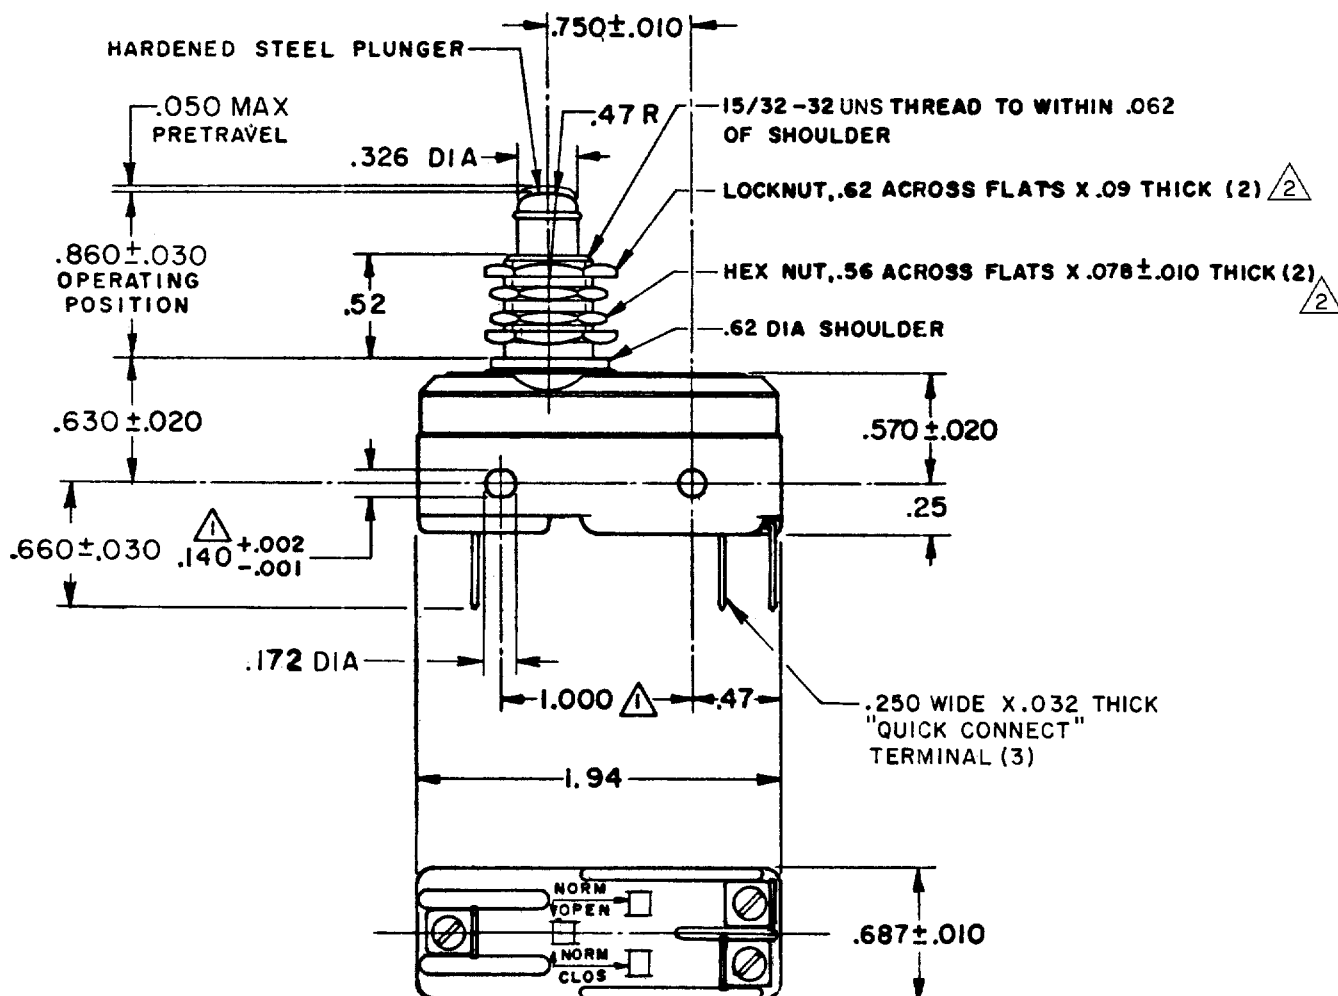


NOTES

- $\triangle 1$ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
- $\triangle 2$ HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 14-22 OZ

RELEASE FORCE — — — — — 10 OZ MIN

DIFFERENTIAL TRAVEL — .0020-.0075

OVERTRAVEL — — — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
20A-125, 250 OR 480 VAC; 10A-125 VAC "L"
1HP-125 VAC; 2HP-250 VAC
CODE L23 1/2A-125 VDC; 1/4A-250 VDC

L288
L299
L308



20(3)A 250V $\sim$ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.003
ONE PLACE	X,X	0.01/018	X,X	0.38/015
TWO PLACES	X,X,X	0.18/005	X,X,X	0.13/005
THREE PLACES	X,X,X,X		X,X,X,X	
ANGLES				

DESIGN UNITS ☐ IN METRIC ☒ US CUSTOMARY

WEIGHT .080 LB.