

**MICRO SWITCH**

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

PROBORT, MINNESOTA

FED. MFR. CODE 91929

# SWITCH - BASIC

CATALOG LISTING

**BA-2RT**

**BA-2RT**

PAGE 1 OF 1

**M**

DRAWING  
NUMBER

ISSUE

REPLACES

RELEASE NO. SR 3768

RSC 28 Sept 39

CHECK

REVISIONS

|   |            |     |           |
|---|------------|-----|-----------|
| A | CO-59351-D | JWB | 18 JUL 91 |
| B | CO-77590   | SAD | 8 JUNE 94 |
| C | CO-92159   | CSL | 21 JAN 98 |
| D | CO93346    | DLT | 22 AUG 98 |

CHECK

20 OCT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56

CHECK

26 SEPT 56


CHECK

26 SEPT 56

FORMTEK

DRAWN

R.E.R.

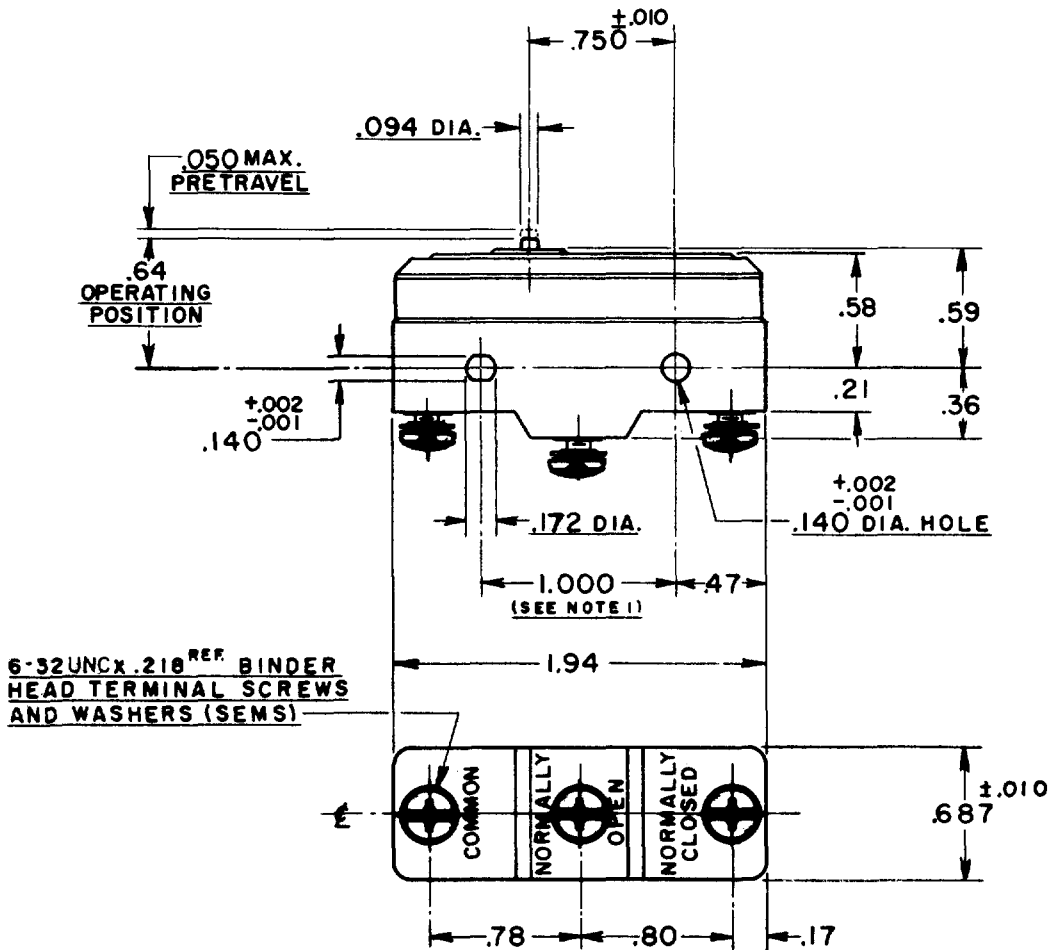

## NOTE

1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 $\pm$ .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

## CHARACTERISTICS

OPERATING FORCE-----14-22 OZ.  
RELEASE FORCE-----10 OZ. MIN.  
DIFFERENTIAL TRAVEL-----.002-.0075  
OVERTRAVEL-----.010 MIN.

## ELECTRICAL DATA

CONTACT ARRANGEMENT  
S. P. D. T.

BREAK DISTANCE  
.020 MIN.

L23

20A 125, 250 OR 480 VAC  
10A 125 VAC "L"

1HP 125 VAC, 2HP 250 VAC  
1/2A 125 VDC, 1/4A 250 VDC

L288  
L299  
L308



20(3)A 250V ~ T85 5E4

## SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE  
SPECIFIED  
DIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**

|             |        |            |
|-------------|--------|------------|
| ONE PLACE   | (.0)   | $\pm$ .030 |
| TWO PLACE   | (.00)  | $\pm$ .015 |
| THREE PLACE | (.000) | $\pm$ .005 |
| ANGLES      |        | $\pm$      |

WEIGHT .063 LB.