

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BA-2RV303

ABS3543

BA-2RV303

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE

5

RELEASE NO. PR-14048 REPLACES X82438-BA

REVISIONS

A	CO 77590 SAD 10 JUN 94
B	C093346 DLT 26 AUG 98
C	CO- 94212-C DLT 20 SEP 99
D	0018387 TSG 18 JAN 06

CHECK

18 JAN 06

RJ

CHECK

85

JULY

KAG

11

85

CHECK

TRF

11


JULY

85

FORMTEK

FO-52848-A

DRAWN

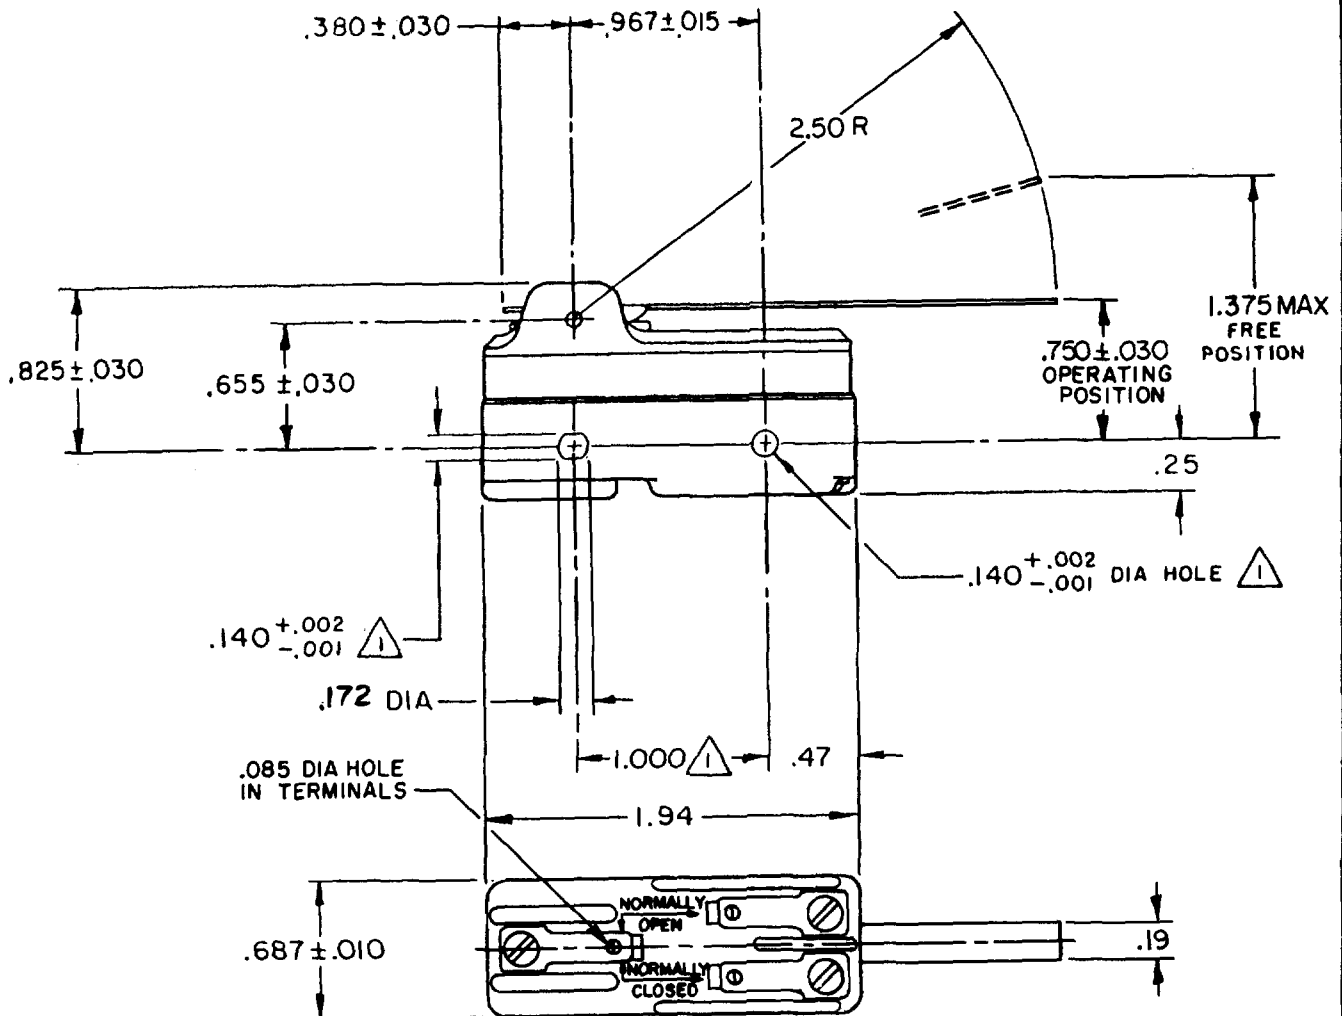


NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 2 1/2 OZ MAX

RELEASE FORCE ----- 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .079 -.109

OVERTRAVEL ----- .078 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23 20A 125, 250, OR 480 VAC
10A 125 VAC "L"
1 HP 125 VAC, 2 HP 250 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

L288
L308
L315

CE 20(3)A 250V T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED TOLERANCES ARE 2

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	
ONE PLACE	X, X	0.4/018	X X
TWO PLACES	X, X	0.15/008	X X X
THREE PLACES	X, X X	0.38/011	X X X
ANGLES		0.13/005	

BI METRIC

US CUSTOMARY

DESIGN UNITS

WEIGHT