

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-2RV314-A22**BA-2RV314-A22**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
4

REPLACES X92105-BA

RELEASE NO. PR-18305

CHECK

REVISIONS

A	CO	77590
	SAD	
9	JUN 94	
B	CO	82886
	JALA	
23	APR 96	
C	CO	093346
	DLT	
26	AUG 98	

CHECK

25 MAY 90

JAP


CHECK

B A B 23 MAY 90

FORMTEK

FO-52850-COI

DRAWN

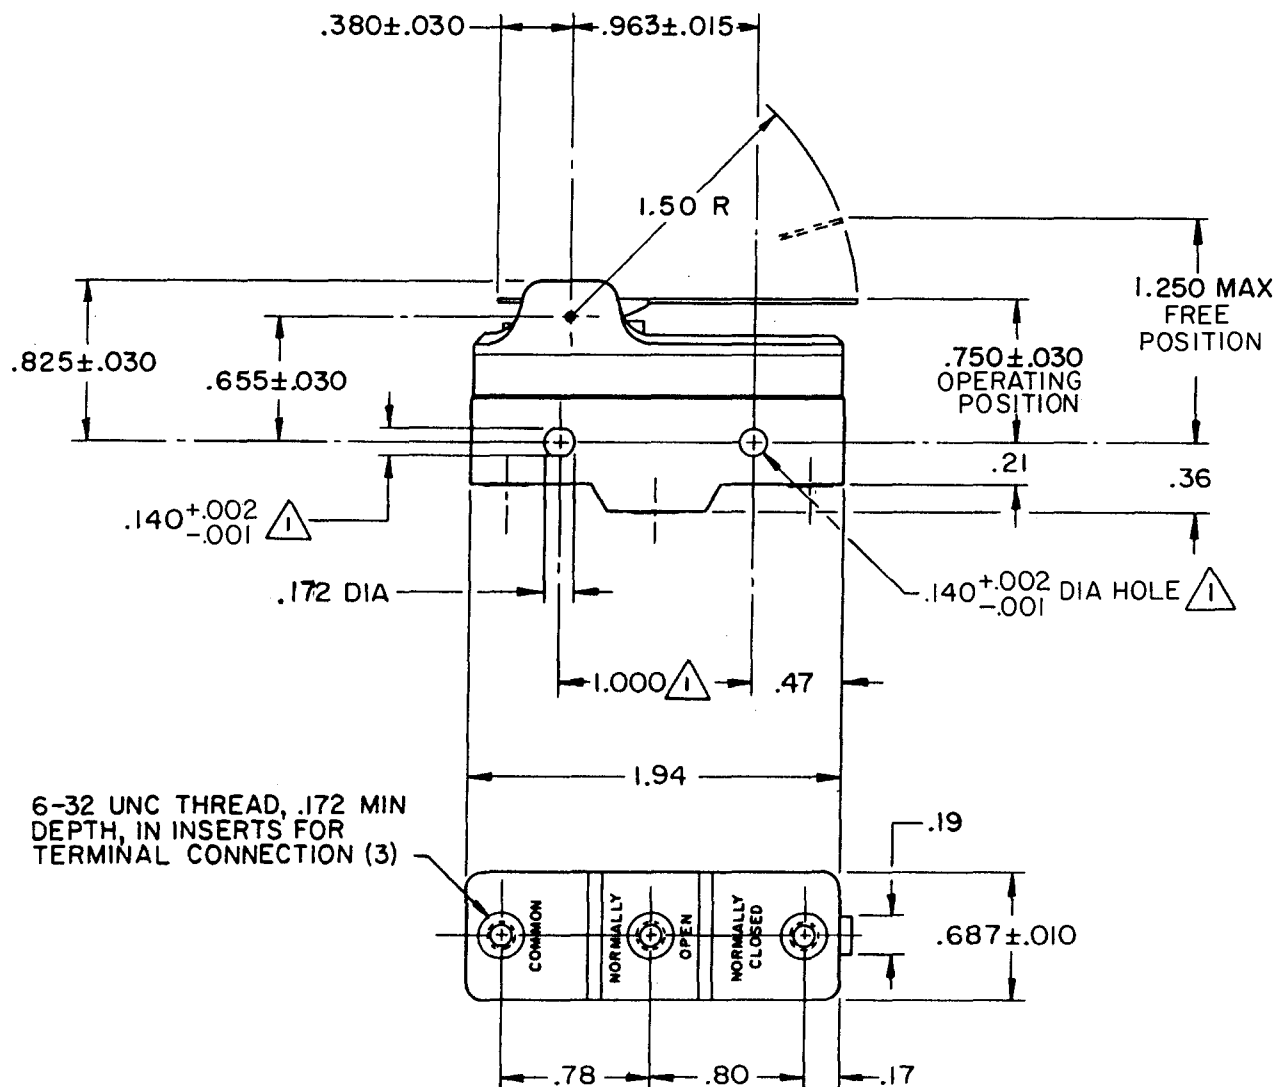

NOTE

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----4 1/2 OZ MAX

RELEASE FORCE-----1/2 OZ MIN

PRETRAVEL-----.470 MAX

DIFFERENTIAL TRAVEL-----.065 MAX

OVERTRAVEL-----.047 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

L23

20A 125, 250, OR 480 VAC

10A 125 VAC "L"

1 HP 125 VAC, 2 HP 250 VAC1/2 A 125 VDC, 1/4 A 250 VDC

L288

L299

L308



20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT