



MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BA-2RV45-A2
ABQ8500

BA-2RV45-A2
PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO.

CHECK

18 JAN 06

RJ

CHECK

17 JULY 02

DAW

CHECK


28 JUNE 62

MBF

FORMTEK

FO-80378

DRAWN

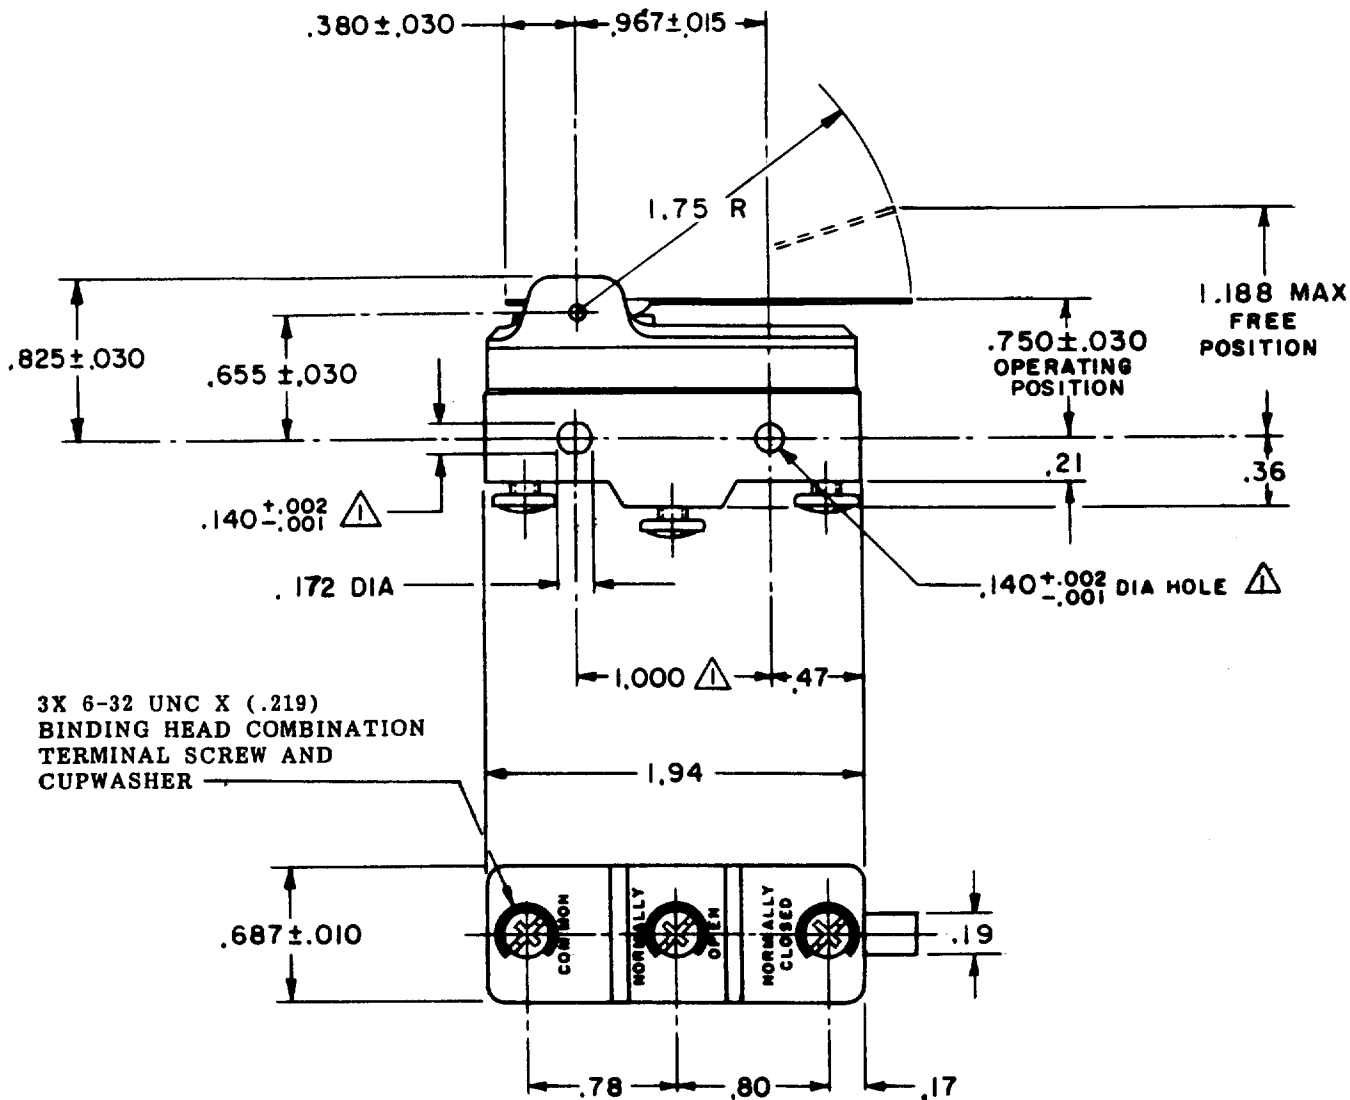

NOTE

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 4 OZ MAX

RELEASE FORCE — — — — 1/2 OZ MIN

PRETRAVEL — — — — .438 MAX

DIFFERENTIAL TRAVEL — — .080 MAX

OVERTRAVEL — — — — .047 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23

20A - 125, 250 OR 480 VAC

10A - 125 VAC "L"

1HP - 125 VAC, 2HP - 250 VAC

1/2A - 125 VDC, 1/4A - 250 VDC

L288

L308

L315

CE
20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT