

BA-3ST
 PAGE 1 OF 1

M

DRAWING
 NUMBER

ISSUE
 11

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO	53551
S	L	15 SEPT 83
B	CO	0063005
J	A	P
5	APR	88
C	CO	59351-D
J	WB	18 JUL 91
D	205503	
G	JW	1 MAY 02

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

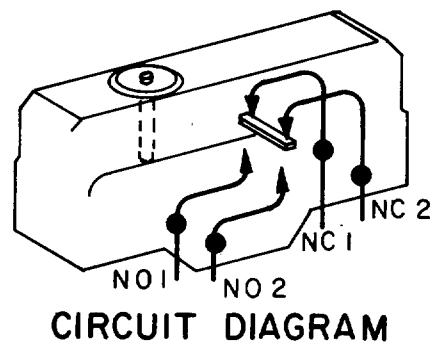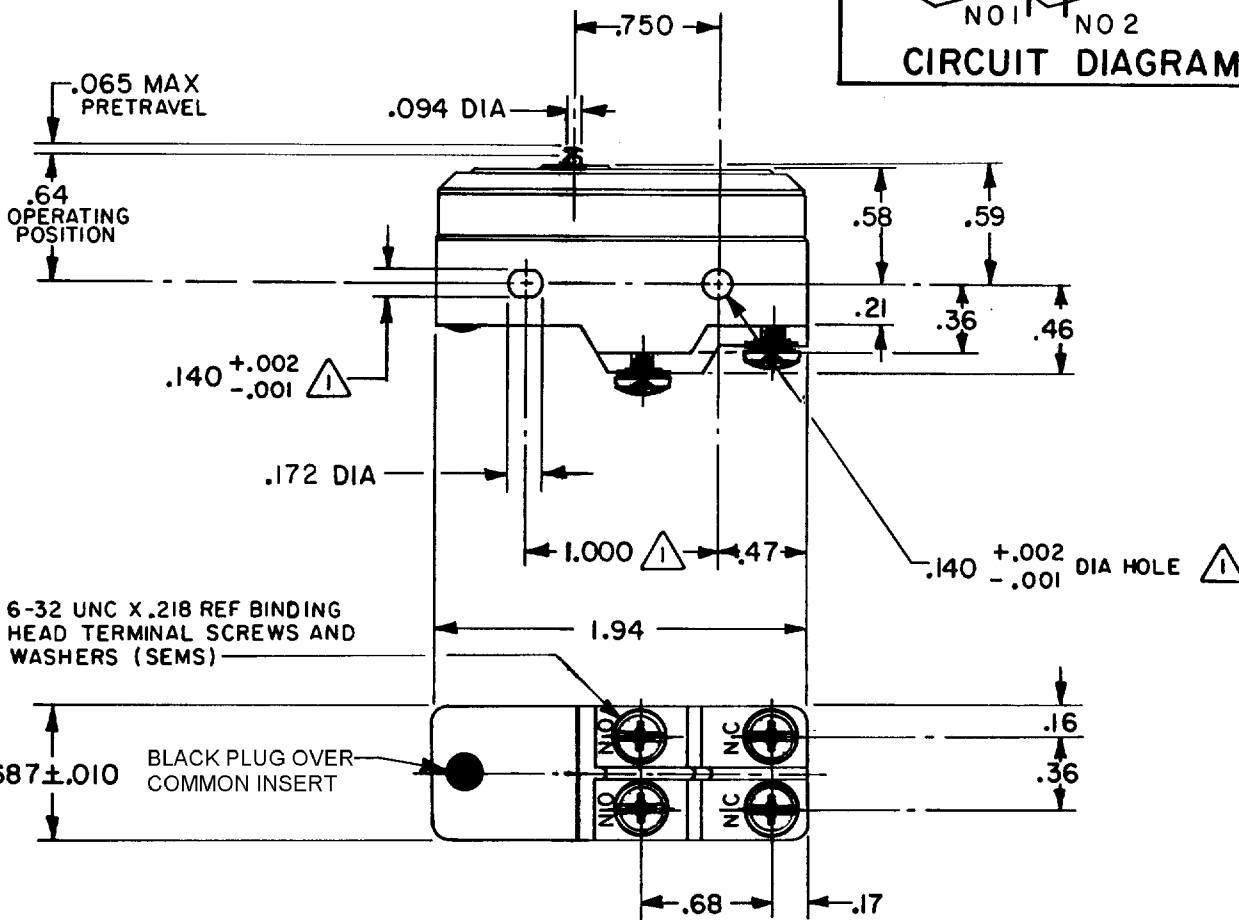


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA ON 1.000 $\pm$.002 CENTERS
- 2 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — — 26- 38 OZ
 RELEASE FORCE — — — — — 10 OZ MIN
 DIFFERENTIAL TRAVEL — — .007 - .015
 OVERTRAVEL — — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 SEE CIRCUIT DIAGRAM

30 VOLTS D.C. RATING (SEA LEVEL TO 50,000 FT)
 INDUCTIVE — — — — — 25 AMP
 RESISTIVE — — — — — 30 AMP
 MAXIMUM INRUSH — — — — — 75 AMP
 BASED ON LIFE OF 25,000 OPERATIONS

25A 125, 250, OR 480 VAC L58
 3/4 HP 125 VAC, 1 1/2 HP 250 VAC
 1A 125 VDC, 0.5A 250 VDC

SCALE FULL

DO NOT SCALE PRINT

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X	X
ONE PLACE	X,X	0.4/.016	X,X	0.8/.03
TWO PLACES	X,X,X	0.15/.006	X,X,X	0.38/.016
THREE PLACES	X,X,X,X		X,X,X,X	0.13/.005

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .067 LB

RASTER

FO-52848-A

DRAWN

CHECK

CHECK