

REPLACES

CATALOG LISTING

BAF1-2RN4-LH

PAGE 1 OF 1

RELEASE NO.

CHECK

REVISIONS

A

CO-1

73287M

GJW

10 MAY 95

CHECK

JJA

25 MAY 95


CHECK

GJW

10 MAY 95

FORMTEK

DRAWN

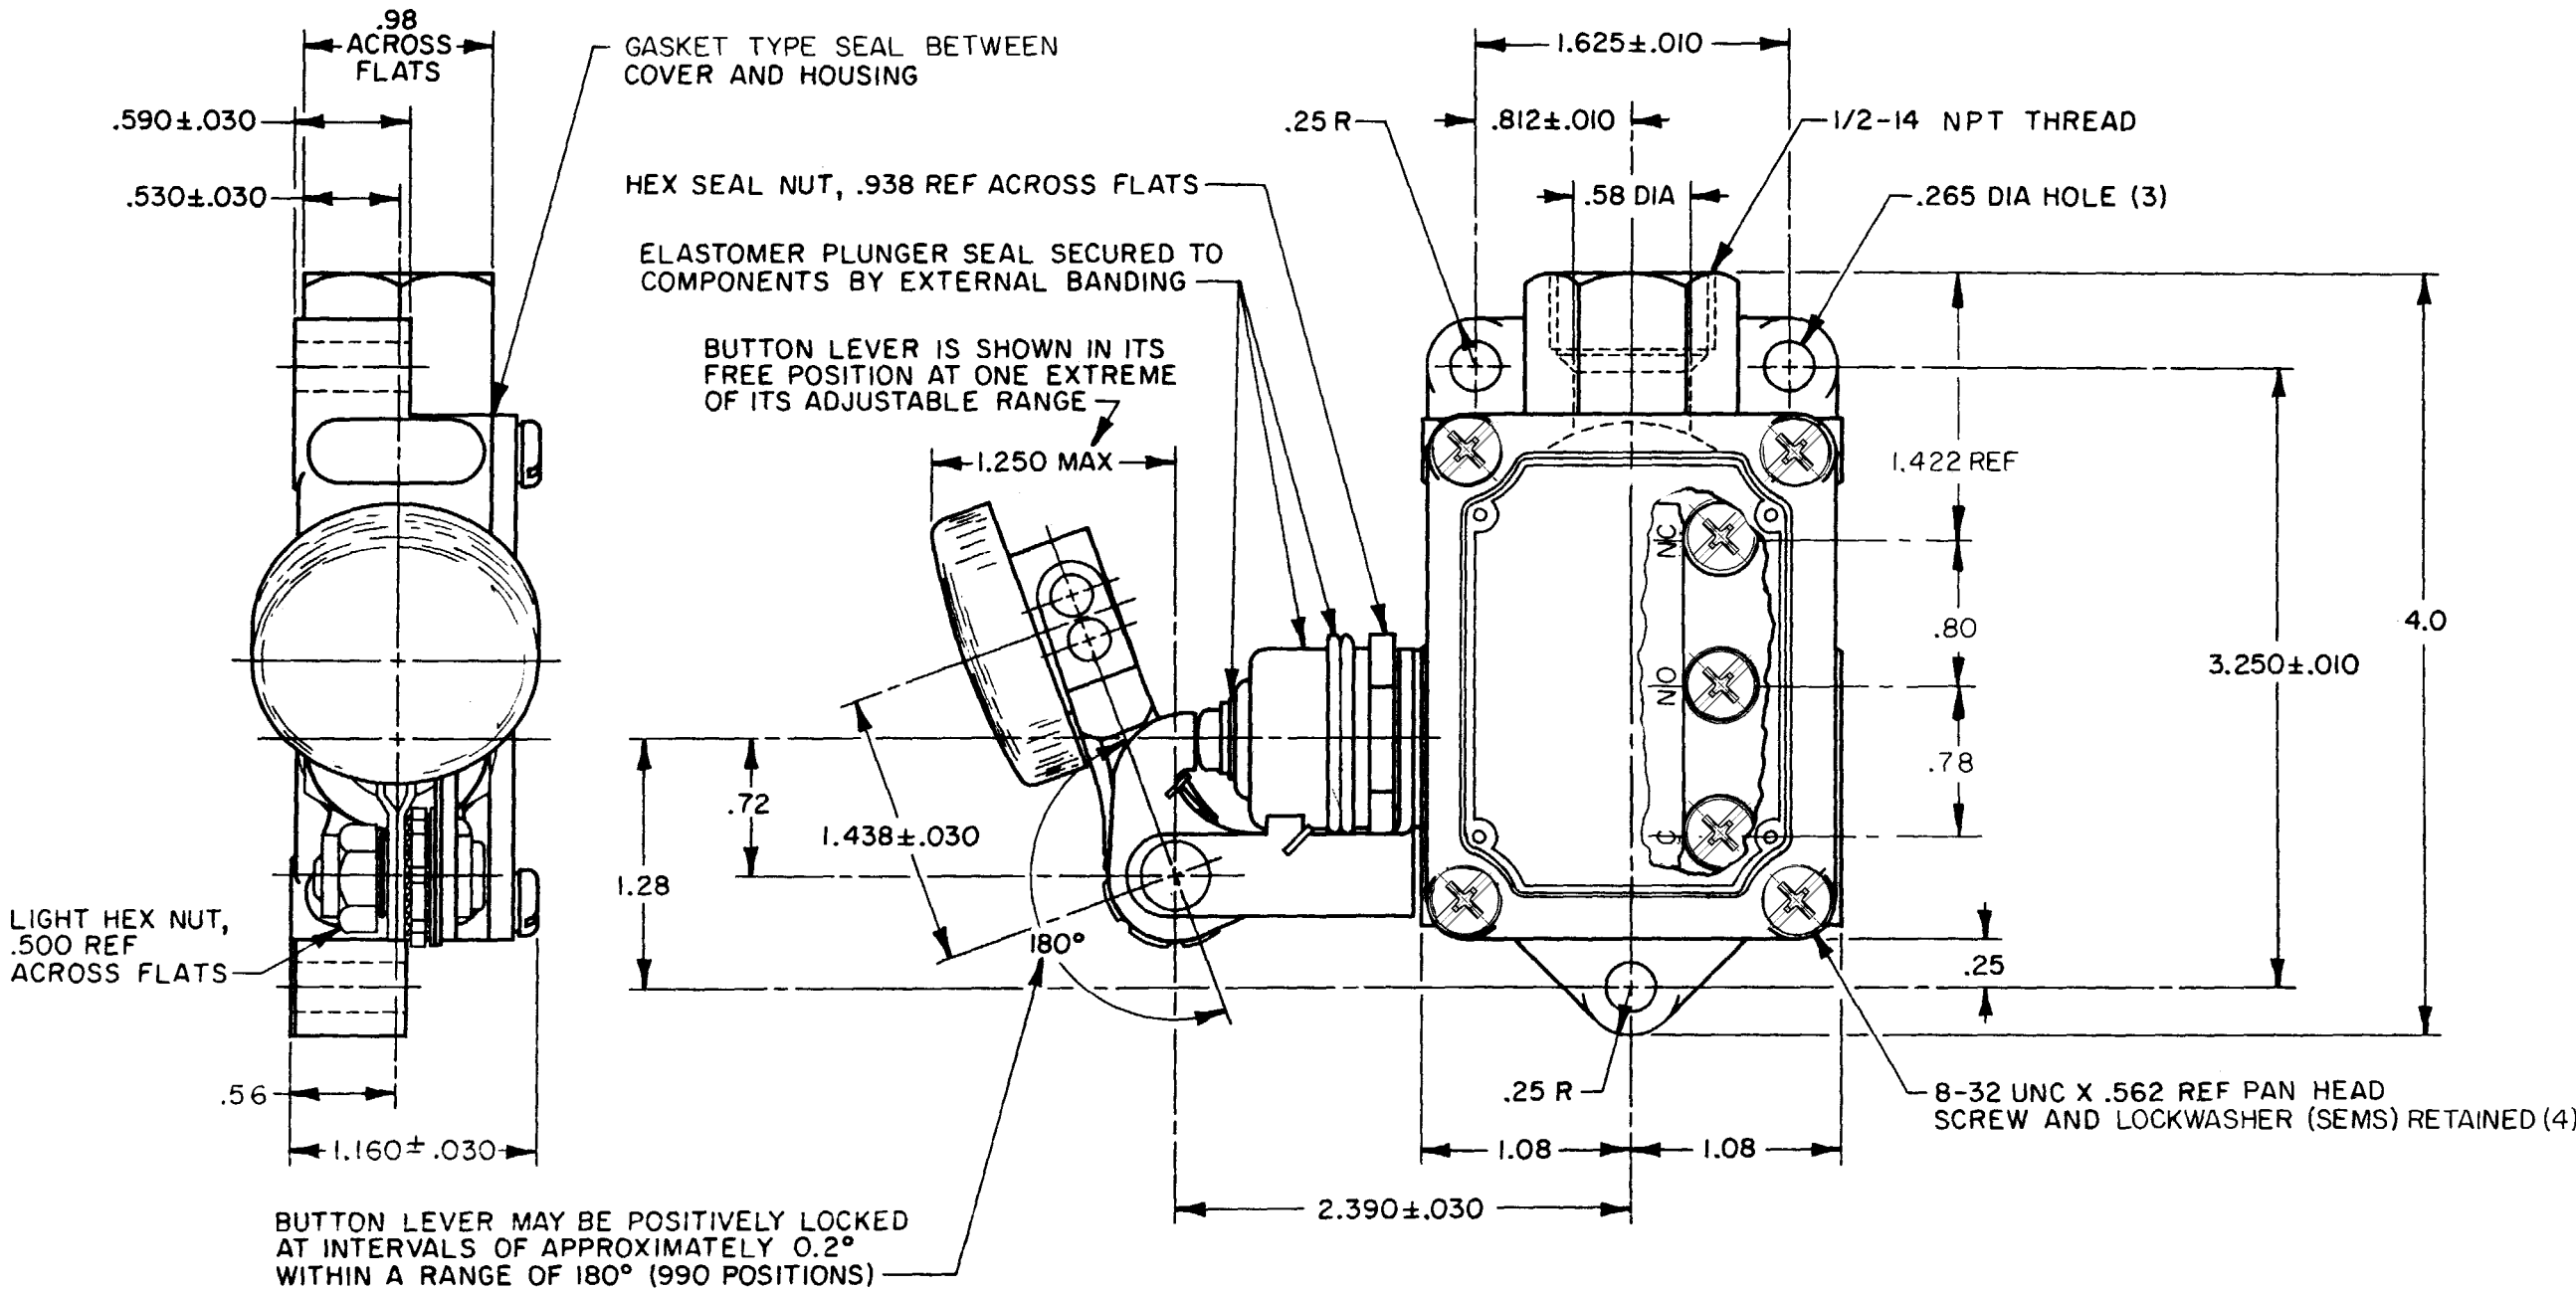

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS
OPERATING FORCE - - - - - 2 LBS MAX
RELEASE FORCE - - - - - 1/2 LB MIN
BASIC SWITCH REPLACEMENT - - - BA-2R708-P7

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
L23 20A 125, 250 OR 480 VAC 10A 125 VAC "L" 1HP 125 VAC, 2HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC



THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.01) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT .670 LB

- NOTE
- 1 - 8-32 UNC X (.219) BINDER HEAD, COMBINATION, TERMINAL SCREWS AND CUPWASHERS
 - 2- BUTTON LEVER BRACKET ASSEMBLY MAY BE SET IN ANY POSITION AROUND AXIS OF PLUNGER