


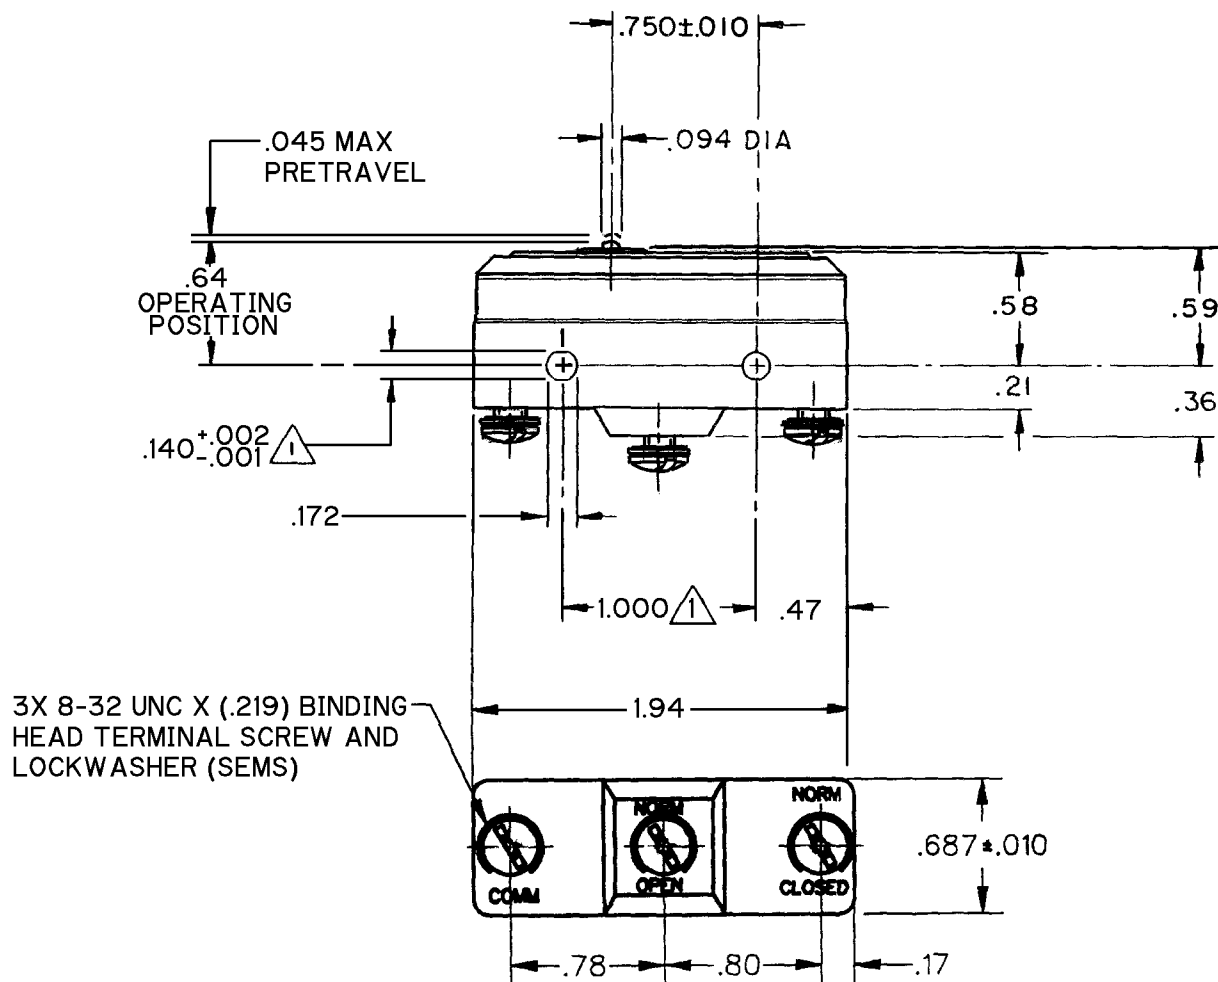


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS
2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - -17 OZ MAX		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
DIFFERENTIAL FORCE - - - - -5 OZ MAX				ONE PLACE	(.0)	±.030
RELEASE FORCE - - - - -10 OZ MIN		25-A-125, 250, 480 VAC 1 HP-125 VAC; 2 HP-250 OR 480 VAC; PILOT DUTY 750 VA-480 VAC, MAX; 60/75°C (Cu)		TWO PLACE	(.00)	±.015
DIFFERENTIAL TRAVEL - - .0015 - .0040				THREE PLACE	(.000)	±.005
OVERTRAVEL - - - - - .010 MIN				ANGLES		±
				WEIGHT .063 LB		
		 				