

CATALOG LISTING
BE-2R057-A41
 PAGE 1 OF 1
M
 ISSUE 9


REPLACES
PR-636

RELEASE NO.
PR-636

REVISIONS
 A 204993
 G R T
 13 MAR 02

CHECK
 CHECK
 13 MAR 02
 SAV
 CHECK
 13 MAR 02
 GRT

RASTER
 DRAWN

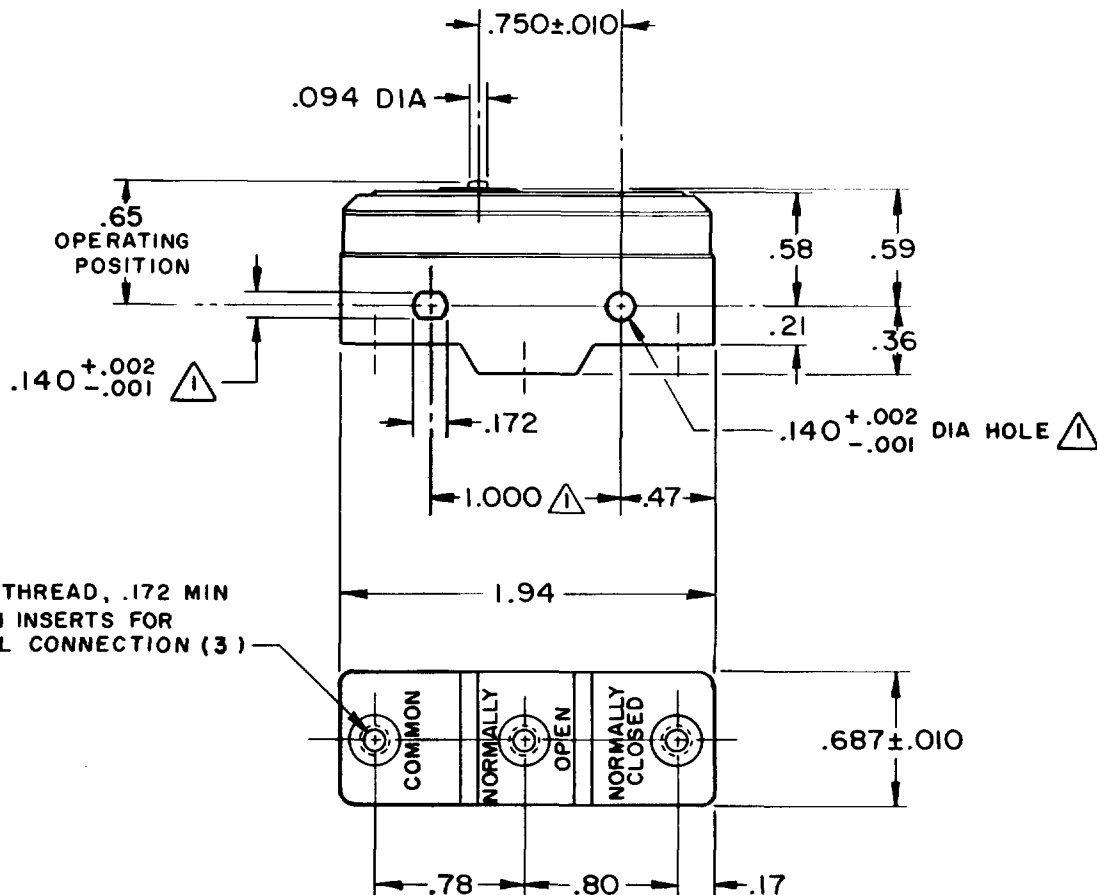

NOTE -
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 CENTERS
 2- PLASTIC MATERIAL USED:
 CASE - - - DUREZ 16274 OR EQUIVALENT (NORMALIZED)
 COVER - - - GEI2983 OR EQUIVALENT (NORMALIZED)
 PLUNGER - - - GE EF-4530 OR EQUIVALENT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - - 24 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE - - - - - 10 OZ MIN	25-A-125, 250, 480 VAC 1 HP-125 VAC; 2 HP-250 OR 480 VAC; PILOT DUTY 750 VA-480 VAC, MAX; 60/75°C (Cu) 	ONE PLACE (.0)	±.030	
DIFFERENTIAL TRAVEL - - - - .0075 MAX		TWO PLACE (.00)	±.015	
OVERTRAVEL - - - - - .015 MIN		THREE PLACE (.000)	±.005	
		ANGLES	±	
		WEIGHT	.063 LB	