


MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING

BE-2R2425

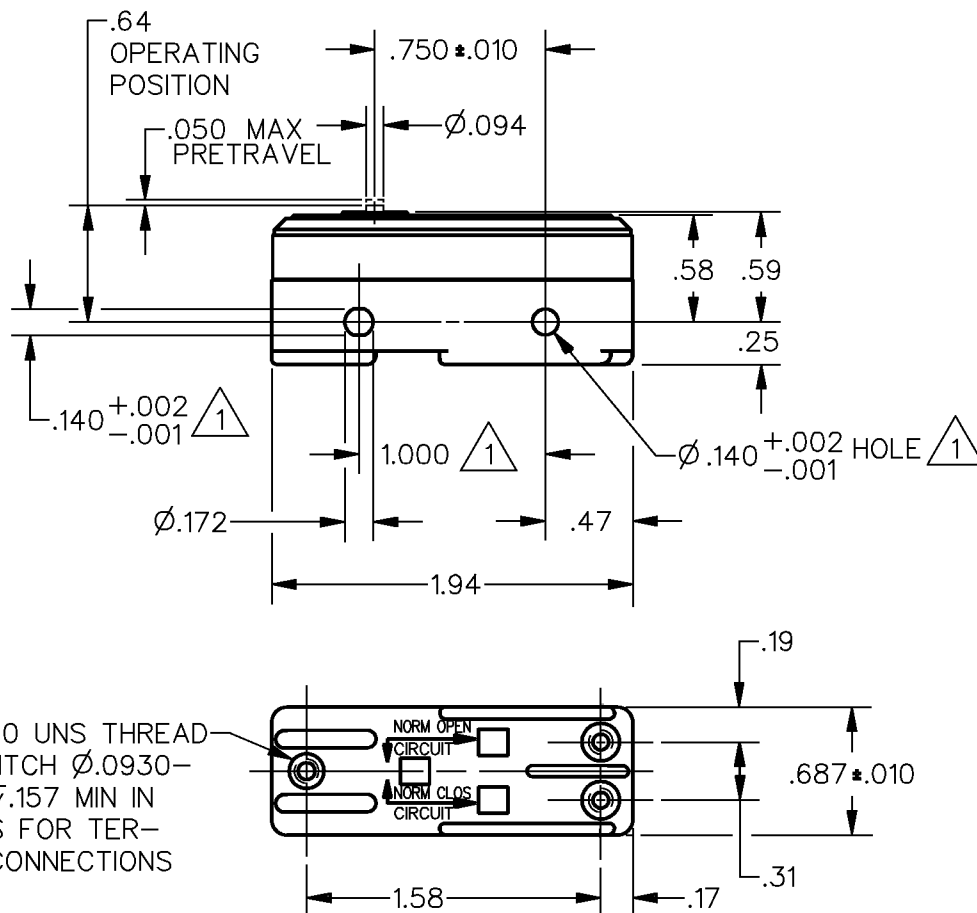


NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - CONTACT MATERIAL - SILVER CLAD SILVER CADMIUM OXIDE
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 25 OZ MAX

DIFFERENTIAL FORCE — — — 1-5 OZ

RELEASE FORCE — — — 10 OZ MIN

DIFFERENTIAL TRAVEL — — .0002-.0016

OVERTRAVEL — — — — — .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

25A 125, 250 480 VAC

1 HP 125 VAC, 2 HP 250 OR 480 VAC

PILOT DUTY

750 VA 480 VAC, MAX

60/75°C (Cu)

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES AREONE PLACE (.0) $\pm .030$ TWO PLACE (.00) $\pm .015$ THREE PLACE (.000) $\pm .005$ ANGLES $\pm$

WEIGHT .050 LB