

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BE-2RL-A4

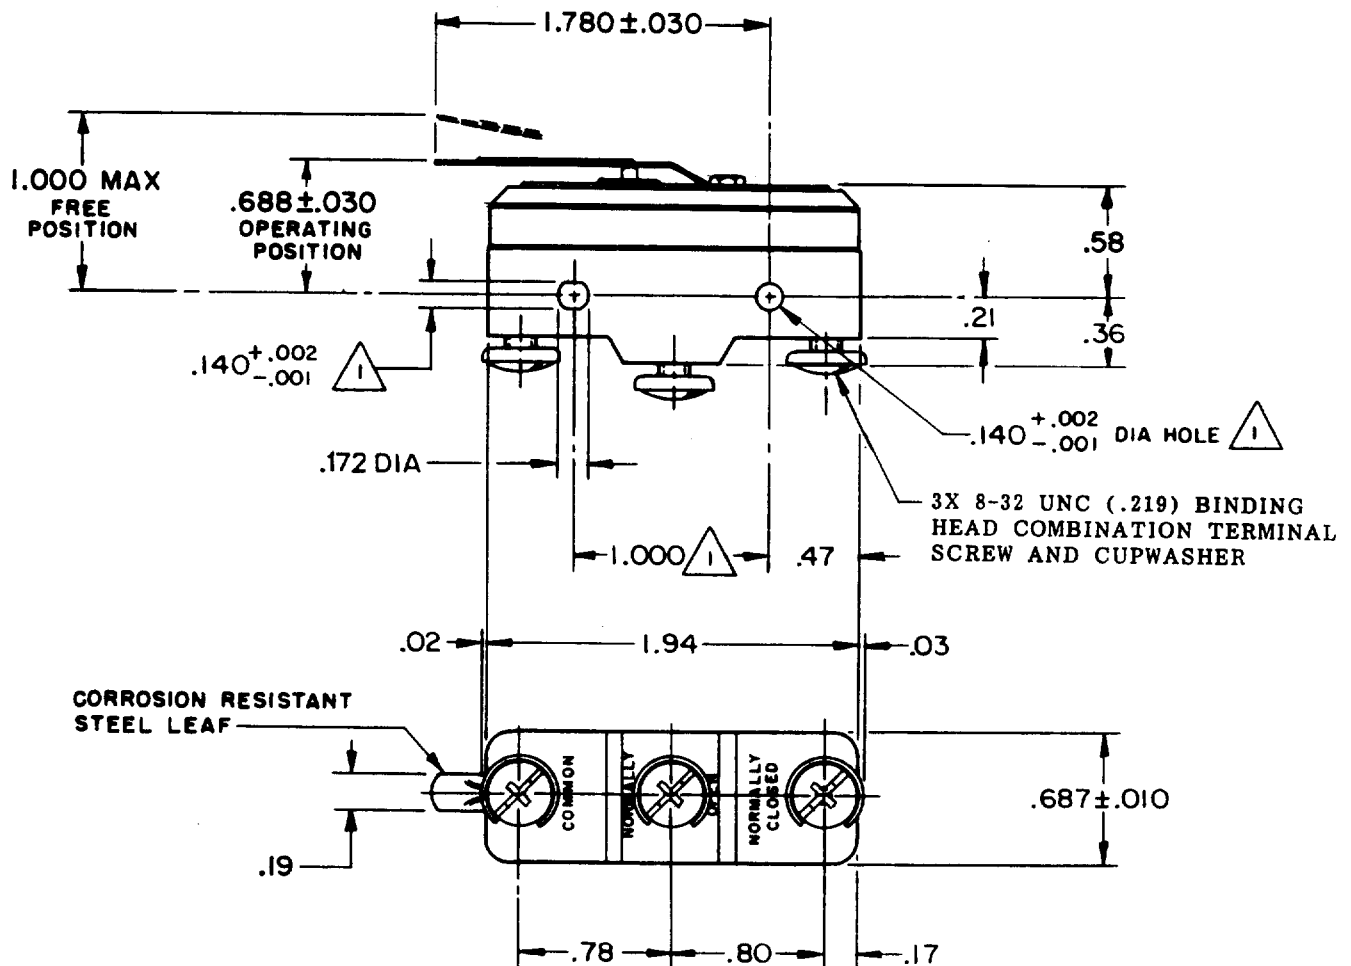

NOTE -
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 OZ MAX
RELEASE FORCE ----- 1 OZ MIN
DIFFERENTIAL TRAVEL ----- .062 MAX
DO NOT OVERTRAVEL MORE THAN ----- .062

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
25-A-125, 250, 480 VAC 1 HP-125 VAC;
2 HP-250 OR 480 VAC; PILOT DUTY
750 VA-480 VAC, MAX; 60/75°C (Cu)



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm .005$

WEIGHT .063 LB

BE-2RL-A4

DRAWING
NUMBER

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE

ISSUE