

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A

A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BE-2RV193-A4**BE-2RV193-A4****M**DRAWING
NUMBER

6

ISSUE

RELEASE NO. PR - 7204 REPLACES

CHECK

REVISIONS

A	C080986
JALA	
11 JUN 95	

CHECK

13 JUNE 78

CHECK

GJH


CHECK

13 JUN 78

R J W

DRAWN

FORMTEK

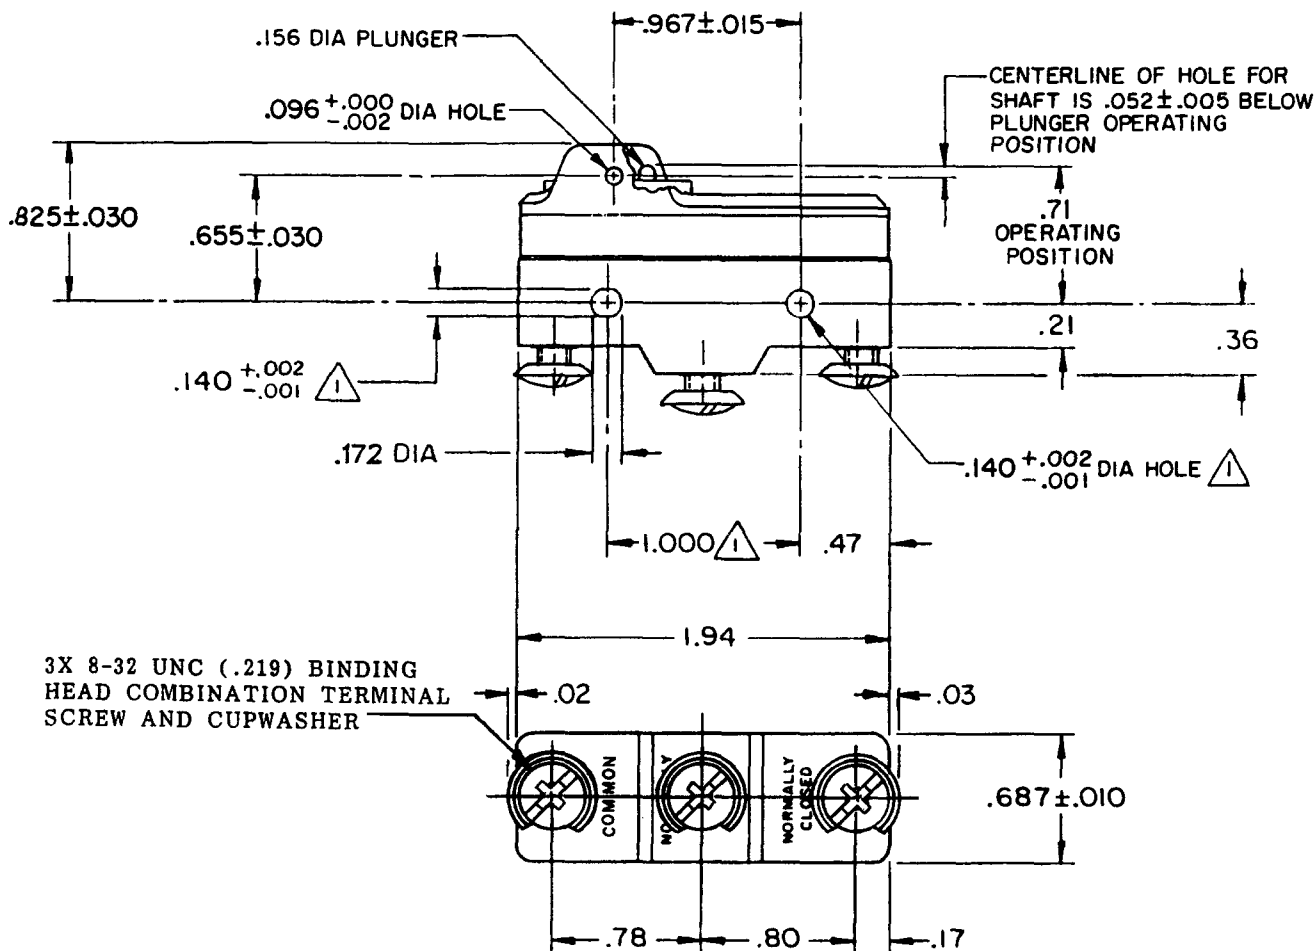


NOTE -

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2 - LEVER (I), AND PIN (I) FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE ----- 15-21 OZ

RELEASE FORCE ----- 10-14 OZ

PRETRAVEL ----- .050 MAX

DIFFERENTIAL TRAVEL ----- .0020-.0075

OVERTRAVEL ----- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

25A-125, 250, 480 VAC
1 HP-125 VAC; 2 HP-250 OR 480 VAC
PILOT DUTY 750 VA-480 VAC, MAX
60/75°C (Cu)**SCALE FULL**

DO NOT SCALE PRINT

TOLERANCESAPPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	
ONE PLACE	X,X	0.4/016	X X 0.8/03
TWO PLACES	X,X,X	0.15/008	X X X 0.38/015
THREE PLACES			X X X X 0.13/005
ANGLES			

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT