

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BE-2RV2-A4

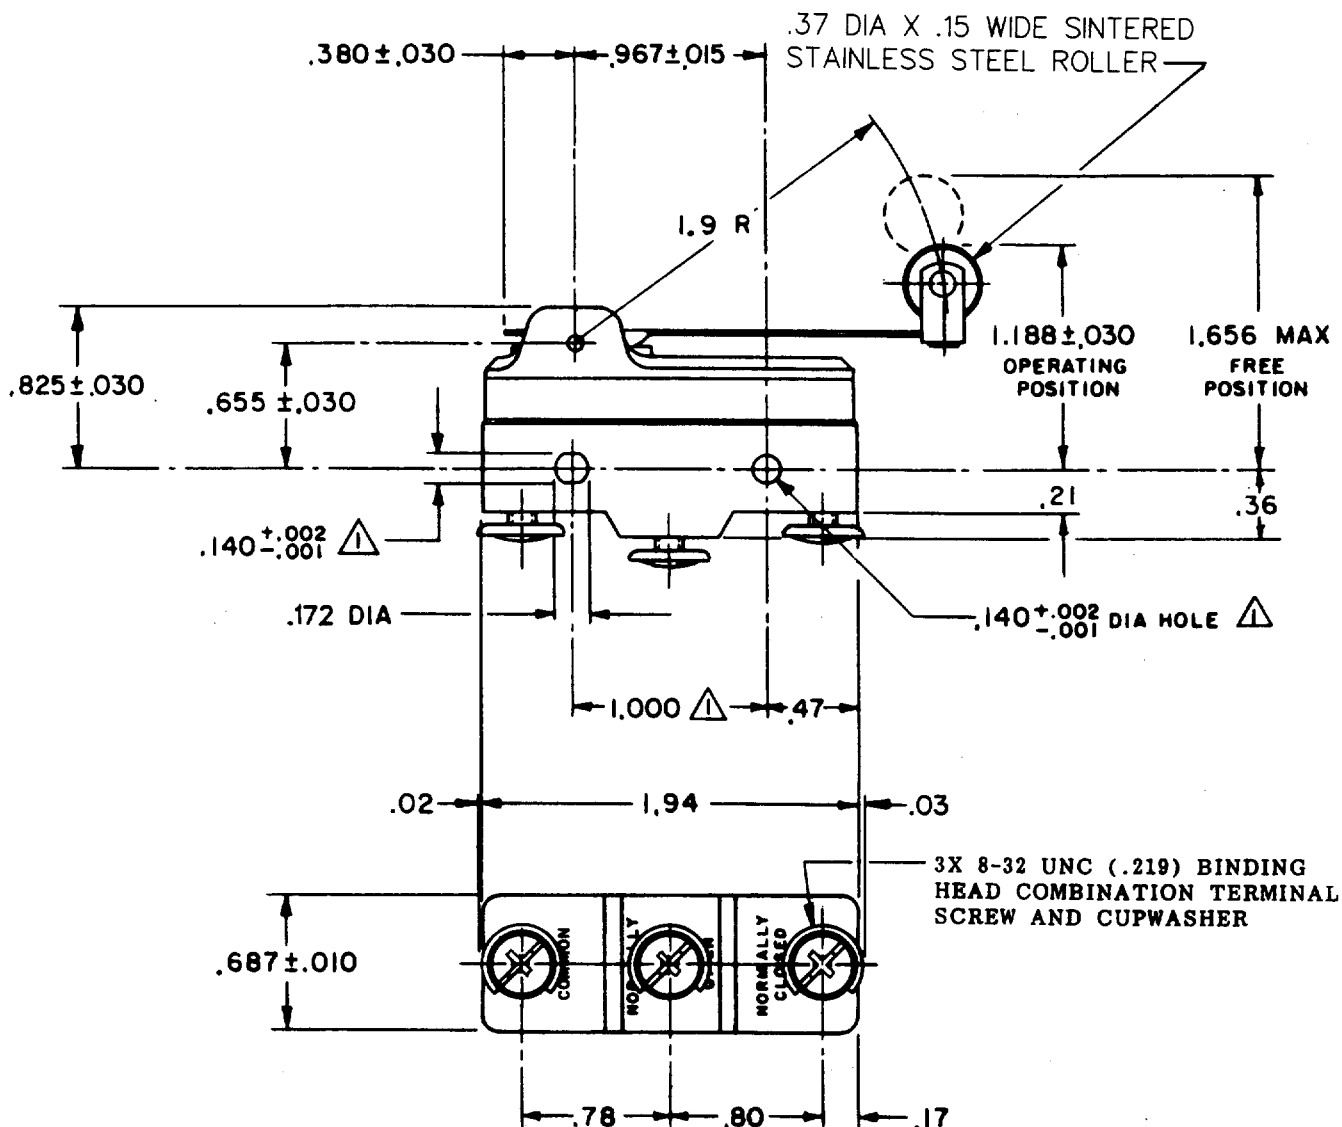

NOTE -
△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 3 1/2 OZ MAX
RELEASE FORCE - - - - - 1/2 OZ MIN
PRETRAVEL - - - - - .468 MAX
DIFFERENTIAL TRAVEL - - - - .085 MAX
OVERTRAVEL - - - - - .062 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
25-A-125, 250, 480 VAC 1 HP-125 VAC;
2 HP-250 OR 480 VAC; PILOT DUTY
750 VA-480 VAC, MAX; 60/75°C (Cu)



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

BE-2RV2-A4

DRAWING NUMBER

ISSUE

REPLACES

CHECK

REVISIONS

A CO30432

8 MAY 72

B CO 32144

27 JUL 73

C CO 36627

6 APR 76

D CO 58782

WJM 24 JAN 86

E CO 73287-6

20 OCT 93

F CO 75204R

JWB 1 FEB 94

G CO 77588

KDR 29 MAR 94

OMW 15 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70

16 JUN 70