

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BE-R0512-A2

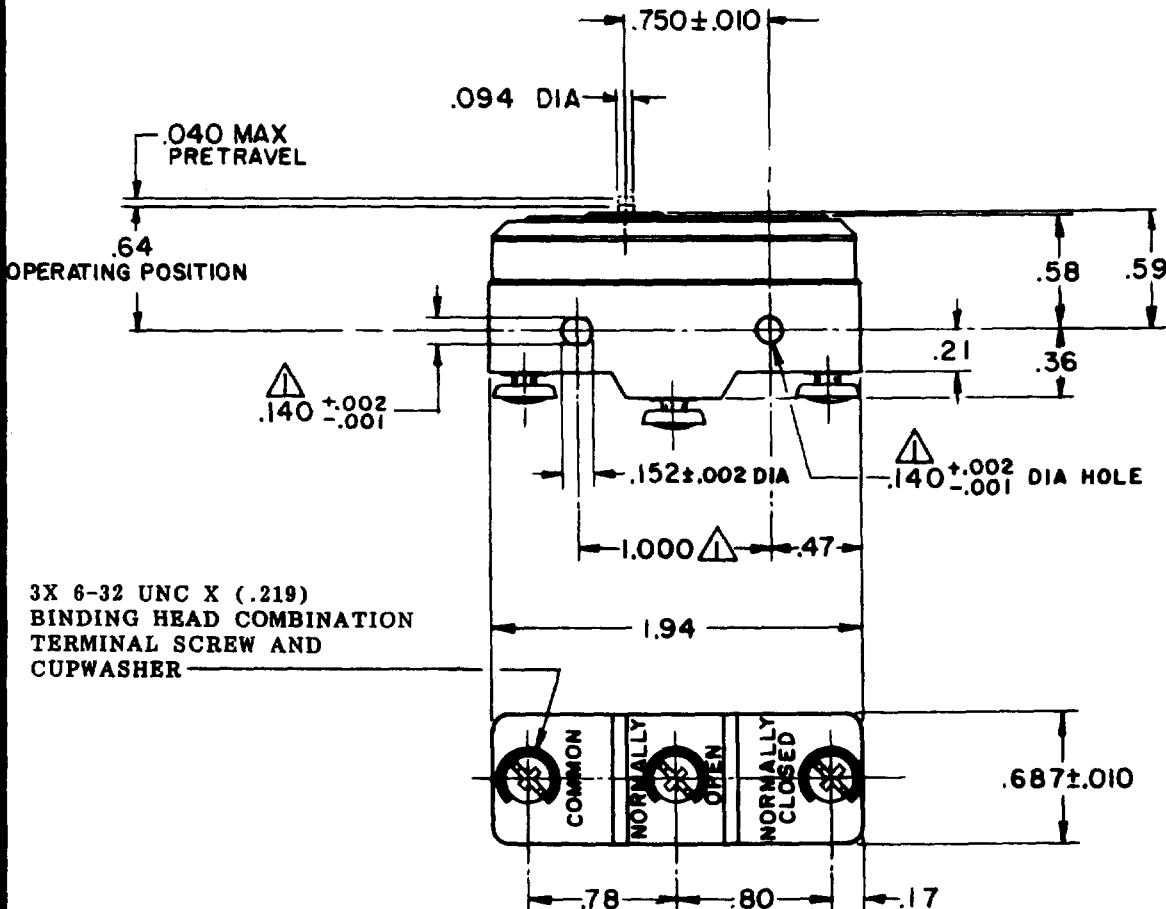

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE-

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2-PLASTIC MATERIAL USED=

CASE ---- DUREZ 16274 OR EQUIVALENT (NORMALIZED)

COVER ---- GE12983 OR EQUIVALENT (NORMALIZED)

PLUNGER -- GE EF-4530 OR EQUIVALENT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ---- 11-17 OZ

RELEASE FORCE ---- 10 OZ MIN

DIFFERENTIAL TRAVEL ---- .0015-.0025

OVERTRAVEL ---- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P O T

25A-125, 250 OR 480 VAC
3/4 HP-125 VAC; 1 1/2 HP-250 VAC
PILOT DUTY: 375 VA-125, OR 250 VAC
60/75°C (Cu)

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .008
ANGLES ±

WEIGHT .063 LB

BE-R0512-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

26

ISSUE

8

REPLACES

RELEASE NO. PR-850

CHECK

REVISIONS

AC034627

APR 78

B COS0864

MAR 78

CO

58782

WJM

24 JAN 86

D 68-

73287-1

JAL

22 NOV 93

E 204994

GJV

11 MAR 02

CCH

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

21 AUG 69

RASTER

FO-50376-1A

DRAWN

D L F

20 AUG 69