

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BE-R0512-D69

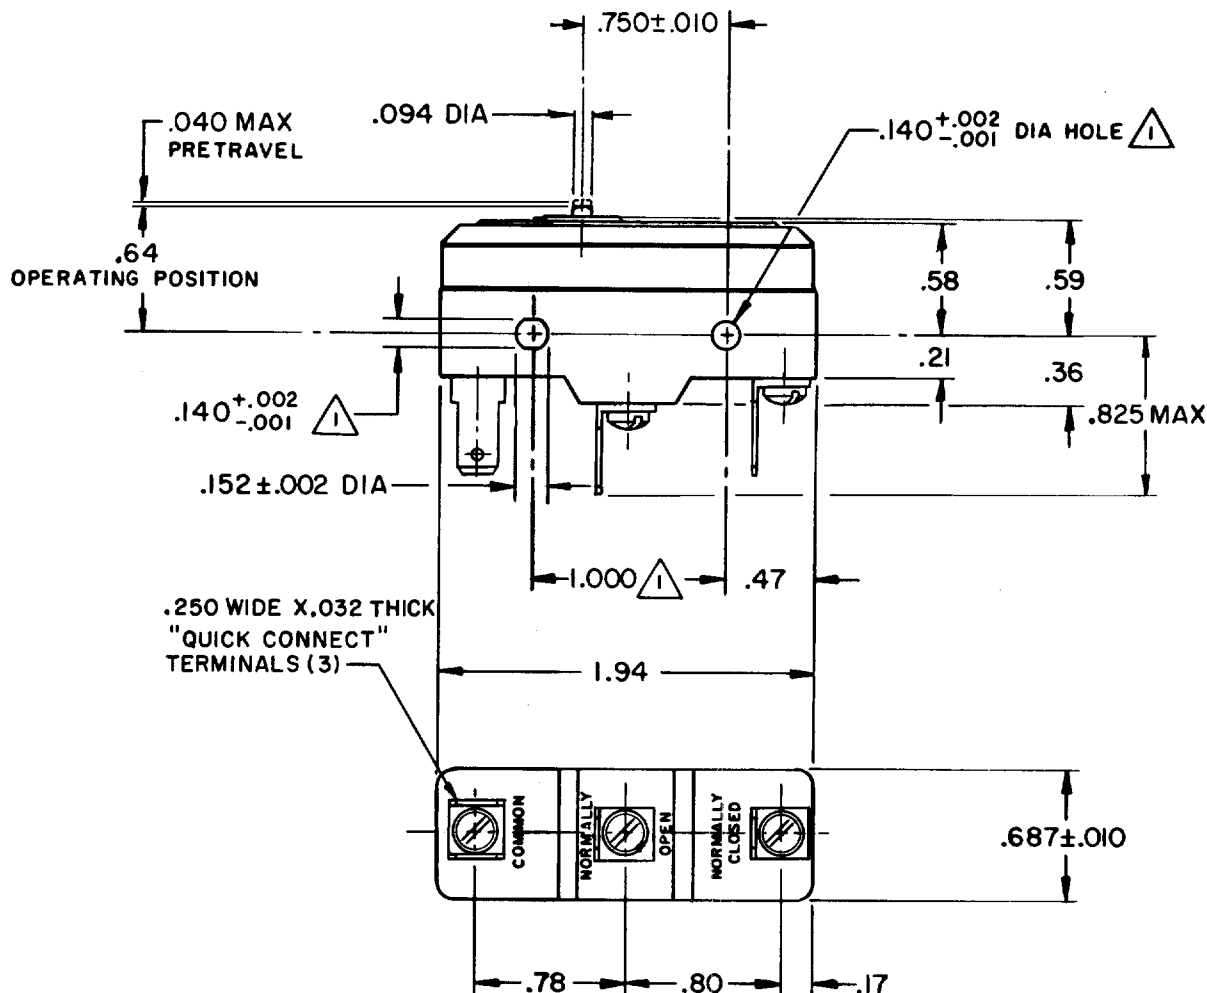

NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

2 - PLASTIC MATERIAL USED:

CASE ----- DUREZ 16274 OR EQUIVALENT (NORMALIZED)

COVER ----- GEI2983 OR EQUIVALENT (NORMALIZED)

PLUNGER --- GE EF-4530 OR EQUIVALENT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 11-17 OZ

RELEASE FORCE ----- 10 OZ MIN

DIFFERENTIAL TRAVEL ---- .0015-.0025

OVERTRAVEL ----- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A-125, 250 OR 480 VAC
3/4 HP-125 VAC; 1 1/2 HP-250 VAC
PILOT DUTY: 375 VA-125 OR 250 VAC
60/75°C (Cu)



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.018
THREE PLACE (.000) ±.008
ANGLES ±

WEIGHT .063 LB

BE-R0512-D69

M

DRAWING
NUMBER

ISSUE
8X5

REVISIONS

A C036627
C J H
5 APR 76
B C039564
S L B
2 MAR 78
C C058782
WJM
24 JAN 86
D 204994
G J W
11 MAR 02

RASTER
O-50378-1A

DRAWN

REPLACES

RELEASE NO. PR-446

CHECK

CHECK

7 DEC 68

DCS

CHECK

68

DEC

6

G F S