MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BFL1-BL3

NOTES
1 - 3X 6-32 UNC PRESSURE PLATE TERMINAL SCREWS
2 FURNISHED UNASSEMBLED
3 SWITCH WILL OPERATE AND RELEASE WITHIN THIS TRAVEL

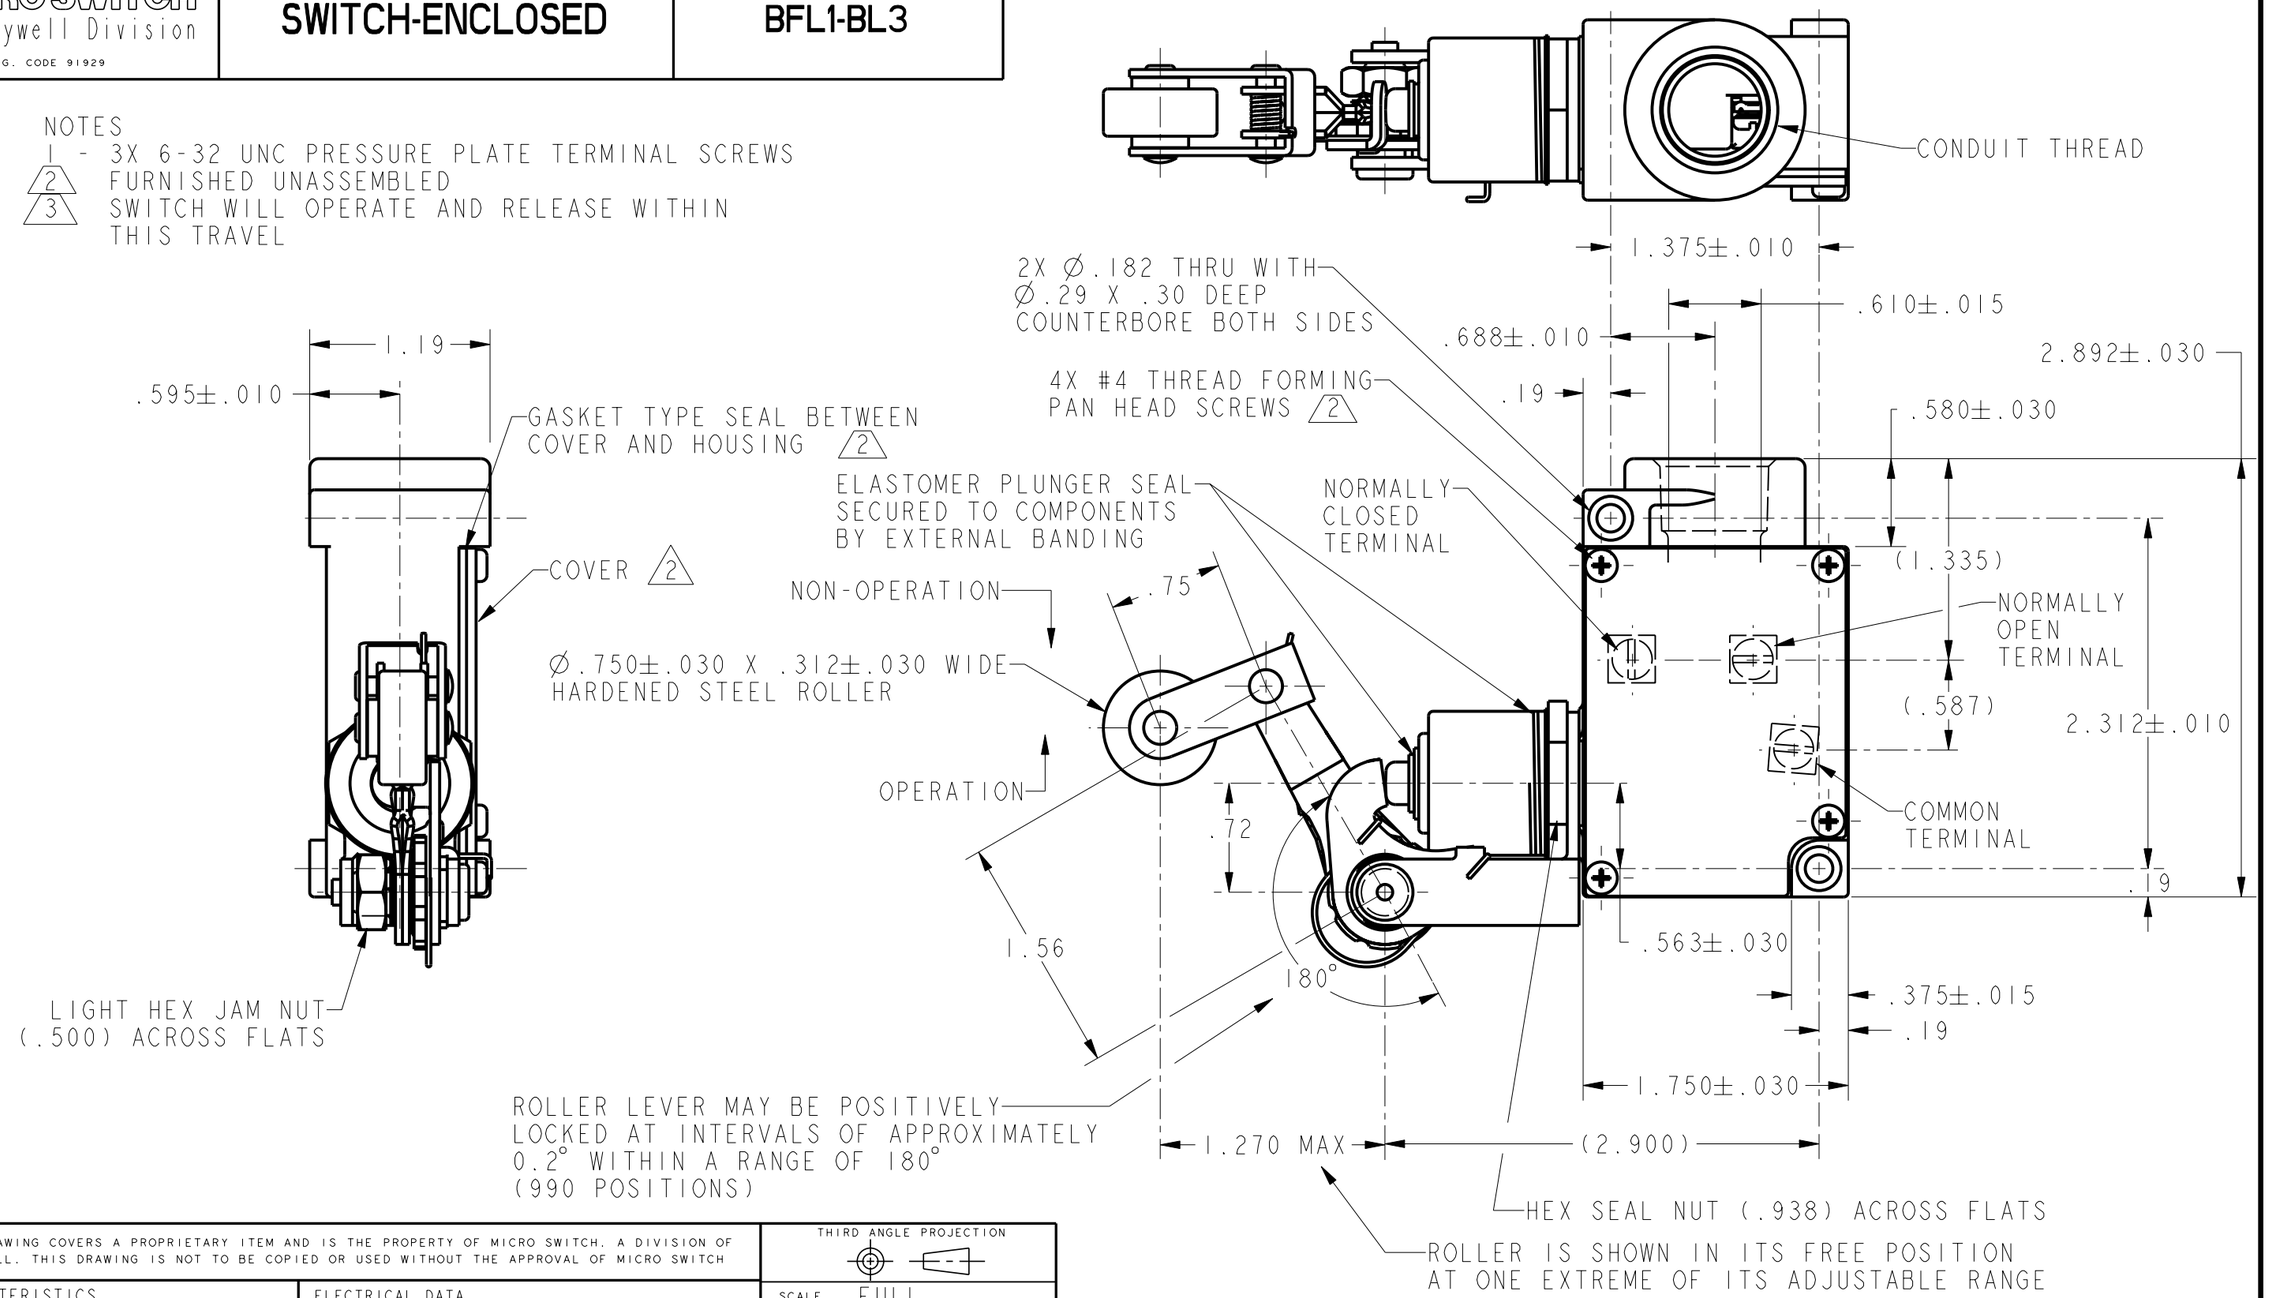

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE: ..... 38 OZ MAX	CONTACT ARRANGEMENT
TOTAL TRAVEL: ..... 3 .370 MIN	S P D T
DIFFERENTIAL TRAVEL: ..... .065 NOM	L156
	11A 1/3HP 125, 250, 277 VAC
	1/2A 125 VDC, 1/4A 250 VDC
	4A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

ANSI Y14.5M-1982 APPLIES

BFL1-BL3
CATALOG LISTING
PAGE 1 OF 1
RELEASE NO. 203802
REPLACES
ISSUE 1
REVISIONS
CHECK
CHECK 5 SEP 01
CHECK SAV
CHECK 5 SEP 01
DRAWN KED
PTC/CAD 2D