

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A

A DIVISION OF HONEYWELL INC.

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BM-1R05314

REPLACES X87678-BM

RELEASE NO. PR-17550

DRAWING NUMBER

BM-1R05314

PAGE 1 OF 1

M

ISSUE

4

REVISIONS

A	CO-77592	03DEC07
DAW	15 AUG 94	
B	CO-94212-A	03DEC07
JJA	28 JULY 99	
C	0035412	
BS	03DEC07	

CHECK

03DEC07

ASD

CHECK

4 AUG 89

WJM

CHECK

89

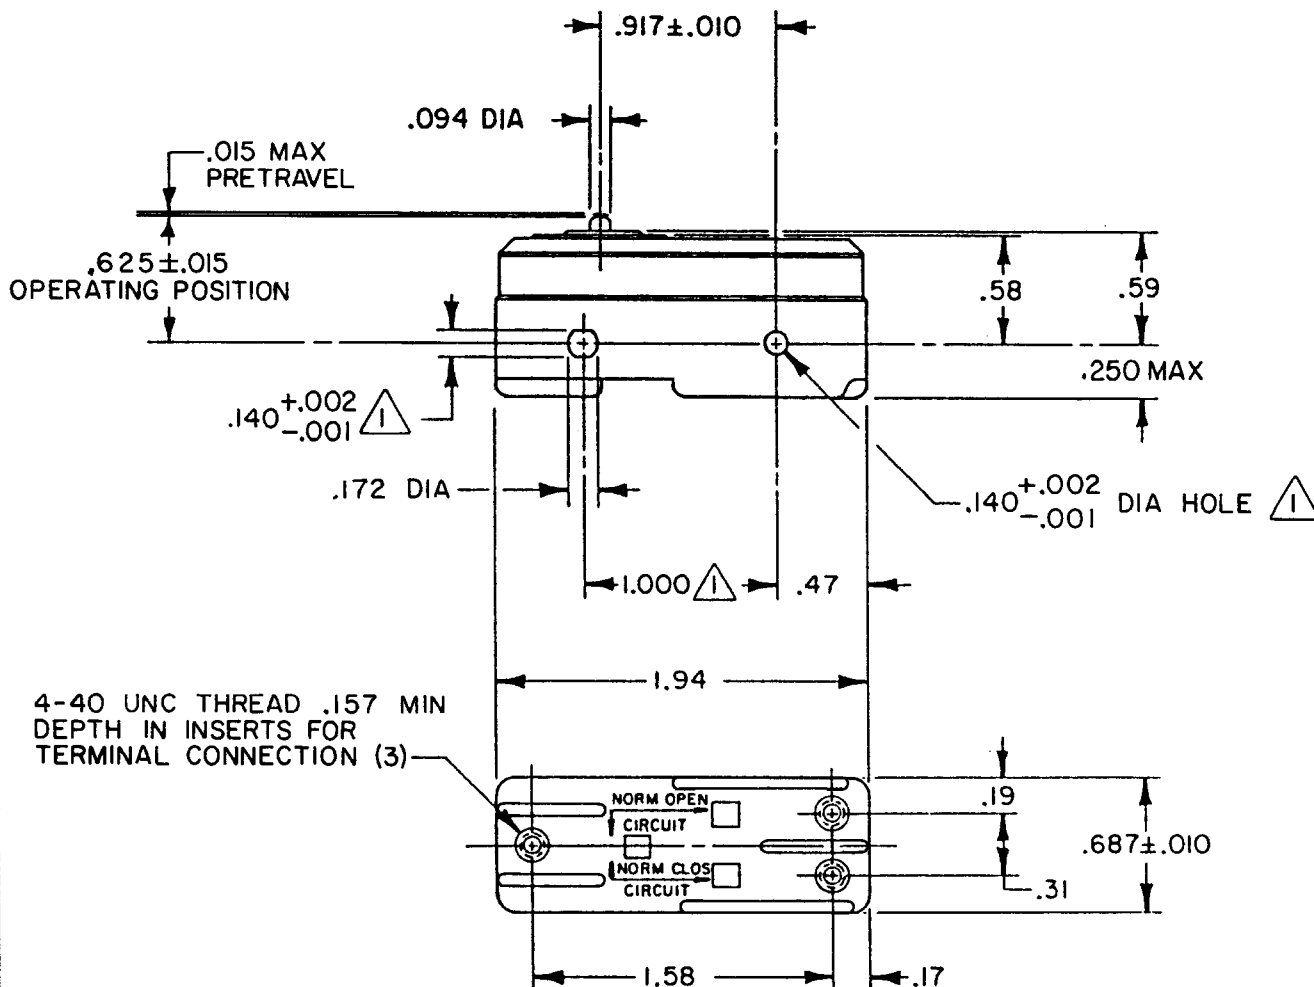
AUG 89

T J A

RASTER

FO-52848-B


DRAWN

**NOTES**

- ① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE — — — — 17 OZ MAX

RELEASE FORCE — — — — 10 OZ MIN

DIFFERENTIAL TRAVEL — — — .0005 MAX

OVERTRAVEL — — — — .023 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D TL82
22A 125, 250 OR 277 VAC
1/4 HP 125 VAC, 1/2 HP 250 VACL288
L315
L318

22A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT .050 LB