

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH - BASIC**

CATALOG LISTING

BM-1R231-A4**S****BM-1R231-A4****M**DRAWING
NUMBER

6

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

X

RELEASE NO. PR-5542

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

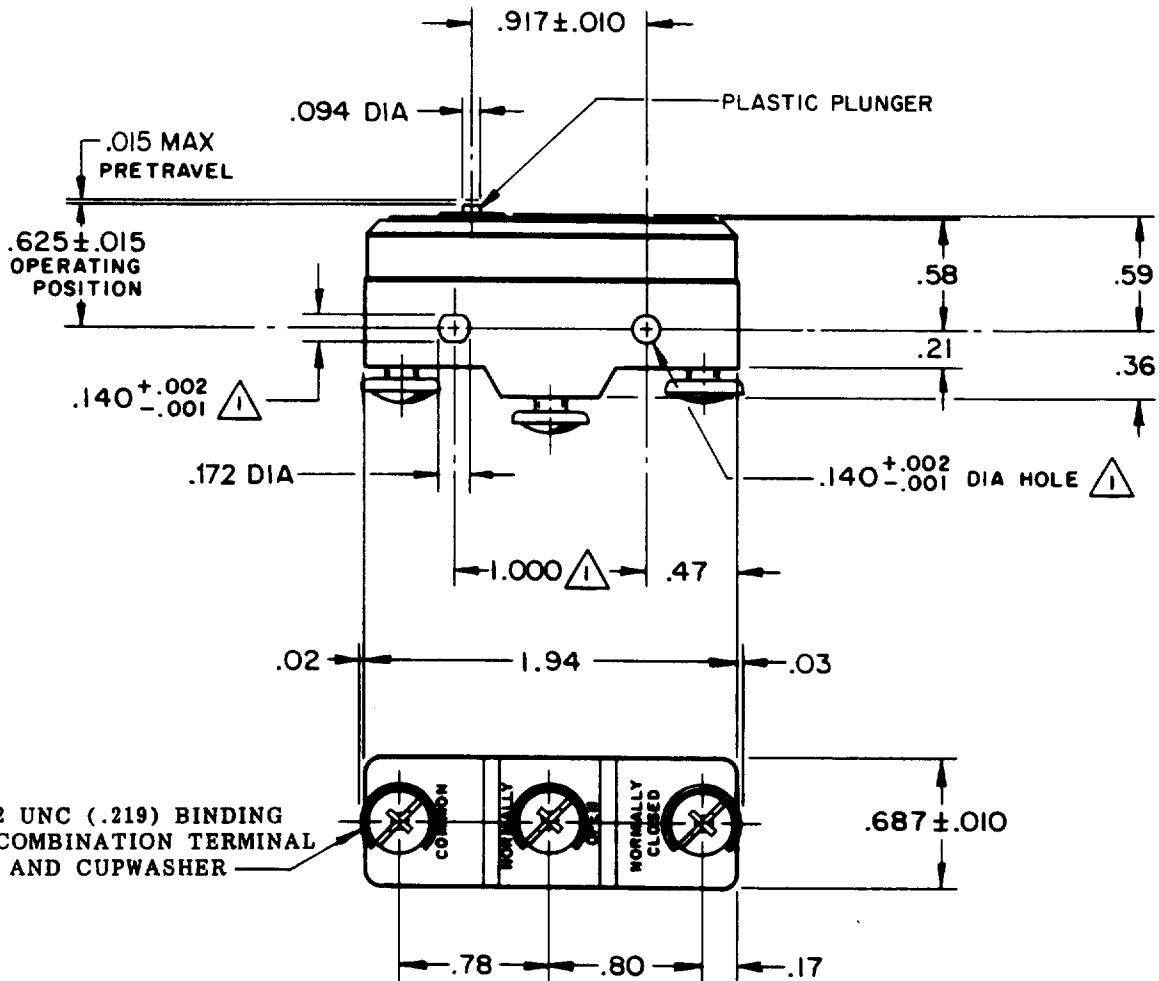


NOTE -

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE --- 198-283 GR.

DIFFERENTIAL FORCE --- 113 GR MAX

DIFFERENTIAL TRAVEL --- .0005-.0010

OVERTRAVEL --- .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D TUL LISTED - FILE E12252
CODE L161 22A-125, 250, 480VAC
1/2HP-125VAC; 1HP-250VACL288
L315
L318

22A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCESAPPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	
ONE PLACE	X,X	0.015	X,X
TWO PLACES	X,XX	0.005	X,XX
THREE PLACES	X,XXX	0.001	X,XXX
ANGLES			

DESIGN UNITS

SI METRIC

US CUSTOMARY

WEIGHT .060 LB

FO-52848-A

DRAWN

R E R

15

JAN

76

LSD