

BME6-2RQ81

M

DRAWING
NUMBER

8

8

ISSUE

8

REPLACES

RELEASE NO.

10 NOV 05

RJ

CHECK

77

77

REVISIONS

A CO-38200

16 SEPT 77

B C053191F

TSK 13 APR 88

D C055989

JAP 6 NOV 84

E C054958

TSK 26 FEB 85

F C072476

MAN 4 SEP 92

G 0016894

KRB 10 NOV 05

FO-8285 1-A

DRAWN


SLB

16 SEPT 77

CHECK


77

77

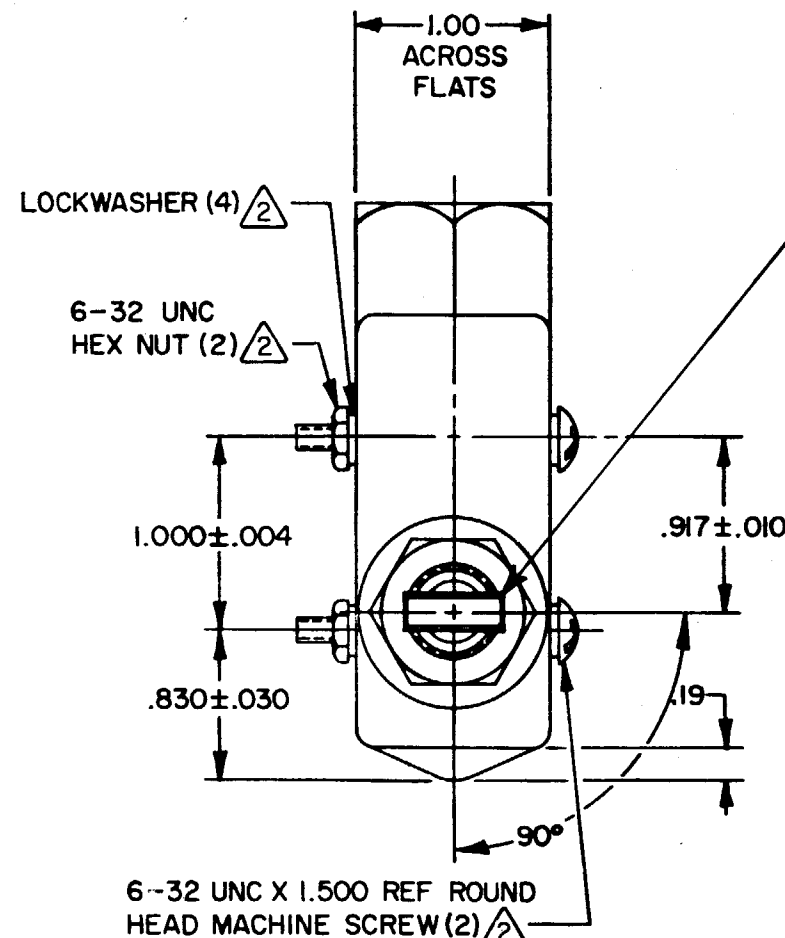

SLOT IN HEX NUT TO CLEAR ROLLER

.50 DIA X .19 WIDE CORROSION RESISTANT STEEL ROLLER

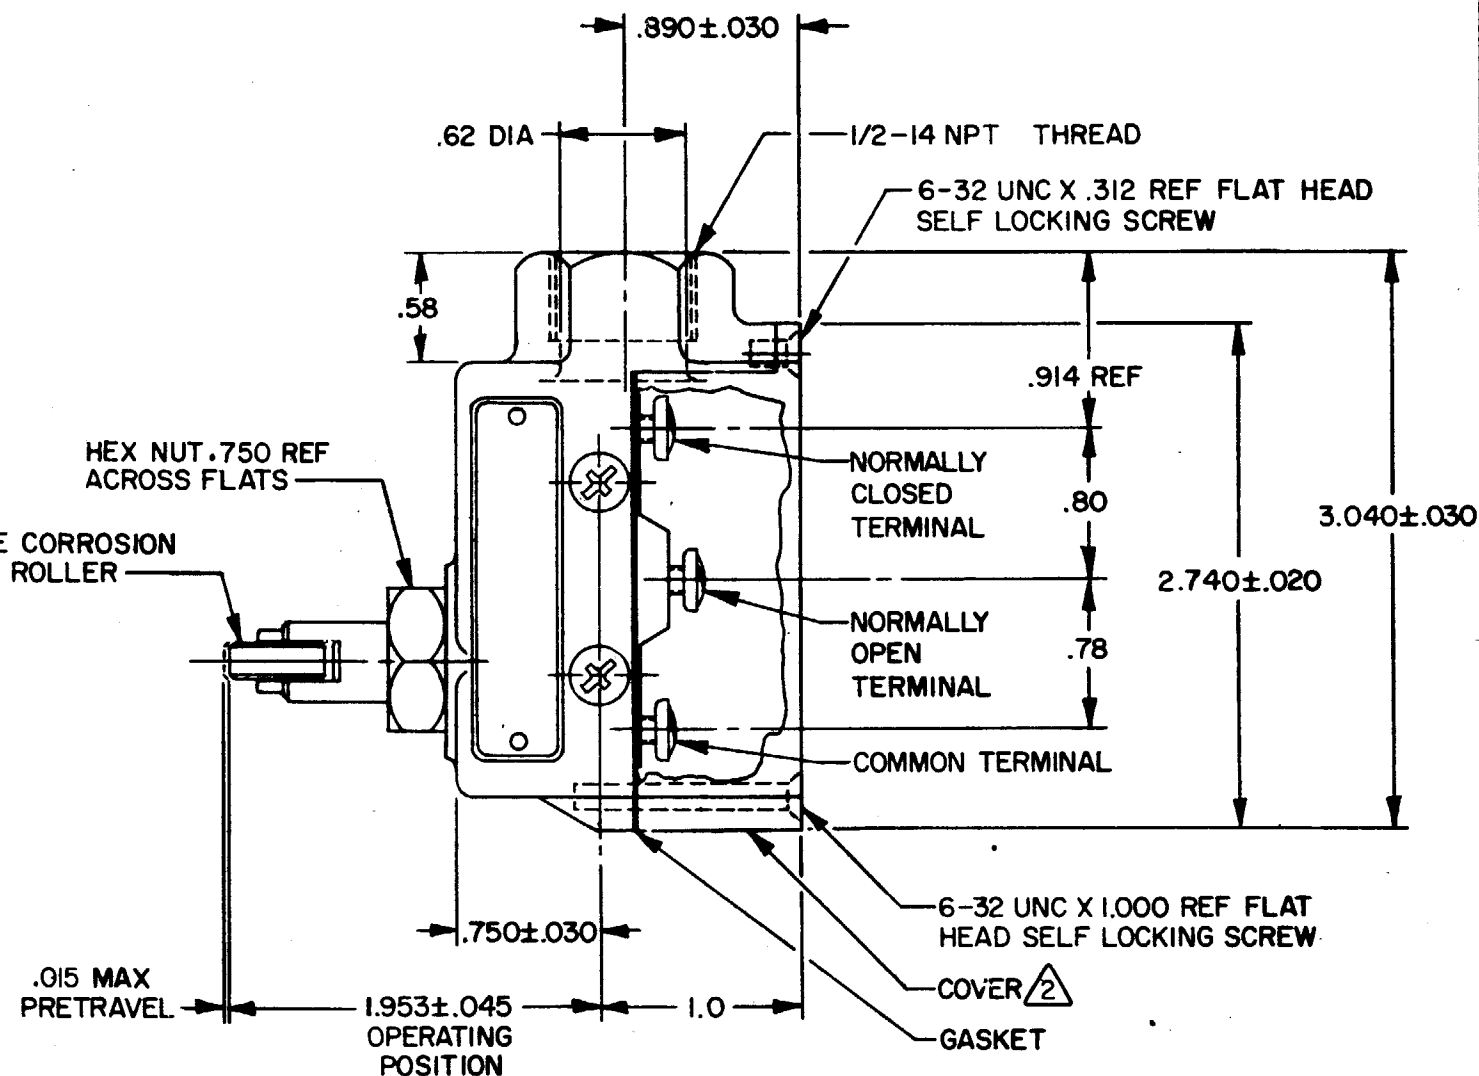

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER(3)
- 2 - FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA1 IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ MIN		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - .002 MAX	22A-125, 250 OR 480 VAC	TOLERANCES ARE:
OVERTRAVEL - - - - - .140 MIN	1/4 HP-125 VAC; 1/2 HP-250 VAC	ONE PLACE (.0) ± .030
BASIC SWITCH REPLACEMENT - - - BM-2RQ785	1/2A-125 VDC; 1/4A-250 VDC	TWO PLACE (.00) ± .015
	CODE L101	THREE PLACE (.000) ± .005
		ANGLES
		WEIGHT .53 LB