

DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAakt AAN DERDEN, NOCH VOOR FABRICATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGGANG VERPLICHT.


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

05

BS, A , 201458, 005

REV.	DATE	DESCRIPTION	BY	C'K'D'
02	22-4-94	CONVERSION ME10	J.G.	
03	10/03/99	Temperature range -55C instead of -25C	K.N.	
04	09/11/05	ADD SIZE 10-3 - ADD 3D VIEW	R Ch	
05	21/01/10	ADD O'SEAL ON THE SECTION VIEW	R Ch	

WIRING FACE

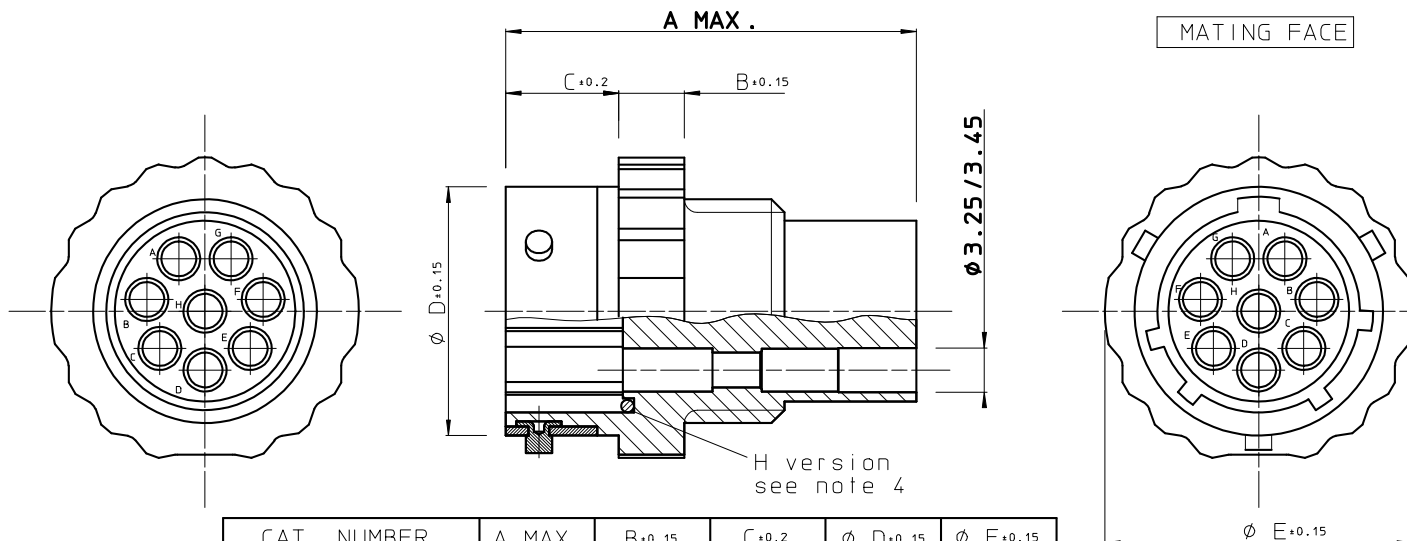

CAT. NUMBER	A MAX.	B+0.15	C+0.2	Ø D+0.15	Ø E+0.15
UTG1103P(H)VDE	31.7	5.0	8.65	15.0	19.5
UTG1104P(H)	31.7	5.0	8.65	15.0	19.5
UTG1125P(H)	31.7	5.0	8.65	19.0	23.5
UTG1128P(H)	31.7	5.0	8.65	19.0	23.5
UTG11412P(H)	31.7	5.0	8.65	22.2	27.0
UTG11619P(H)	31.7	5.0	8.65	25.3	30.0
UTG11823P(H)	31.7	5.0	8.65	28.5	33.3
UTG12028P(H)	33.3	5.0	12.05	31.7	36.5
UTG12235P(H)	33.3	5.0	12.05	34.9	39.7
UTG12448P(H)	33.3	5.0	13.85	38.0	42.5
* NOTE 4					

MATERIAL

UTG1128P AS SHOWN


- BODY : GLASS-FILLED POLYESTER UL94-V0
COLOUR : BLACK.
- TRILOK RING : HIGH STRENGTH CuZn ALLOY,
NICKEL PLATED.


PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 M Ohm MIN.
- TEST POTENTIAL : 2000 V EFF.

NOTES

- 1.CONNECTOR ACCEPTS # 16 STRIP FORMED PIN, MACHINED PIN AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS.
- 2.CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM - TRIO CATALOG.
- 3.FOR OTHER INSERT ARRANGEMENTS SEE BS,C ,201458,000
- 4.FOR WATERPROTECTED VERSION: ADD "H" TO THE CAT.NO. E.G. CAT.NO.: UTG1128PH

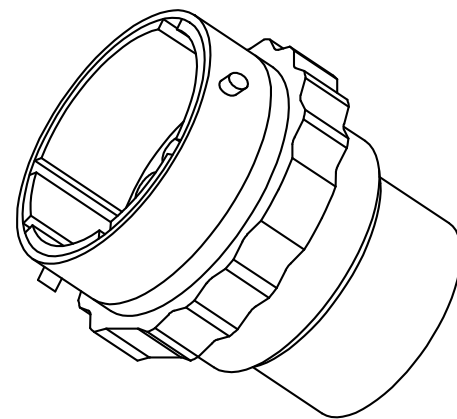

GEN. ST.		01		02		03		04		05		06		07		08		0D		50		60		70		80		90																					
INT. ST.		10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88																	
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN				APPR.		DATE		SIGN.		MALE RECEPTACLE FREE HANGING																																							
				DRAFT		7-6-91		M BUEDS		CAT. No . UTG1---P(H)																																							
				CHECKED						 SOURIAU Connection Technology SOURIAU Route Nationale 23 72470 CHAMPAGNE																		SCALE																					
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.				PROD. MGR.																								REFERENCES / REFERENTIES		BS , A , 201458 , 005																		05	
				PR.ENG.MGR.																																													
ALL DIMENSIONS IN MM				PR.MGT.MGR.						DRAWING NR. CUSTOMER DRAWING REVISION																																							
																																																	
ALLE AFMETINGEN IN MM																																																	