




DESIGN UNITS: METRIC (mm)  
UNLESS OTHERWISE SPECIFIED [INCHES]

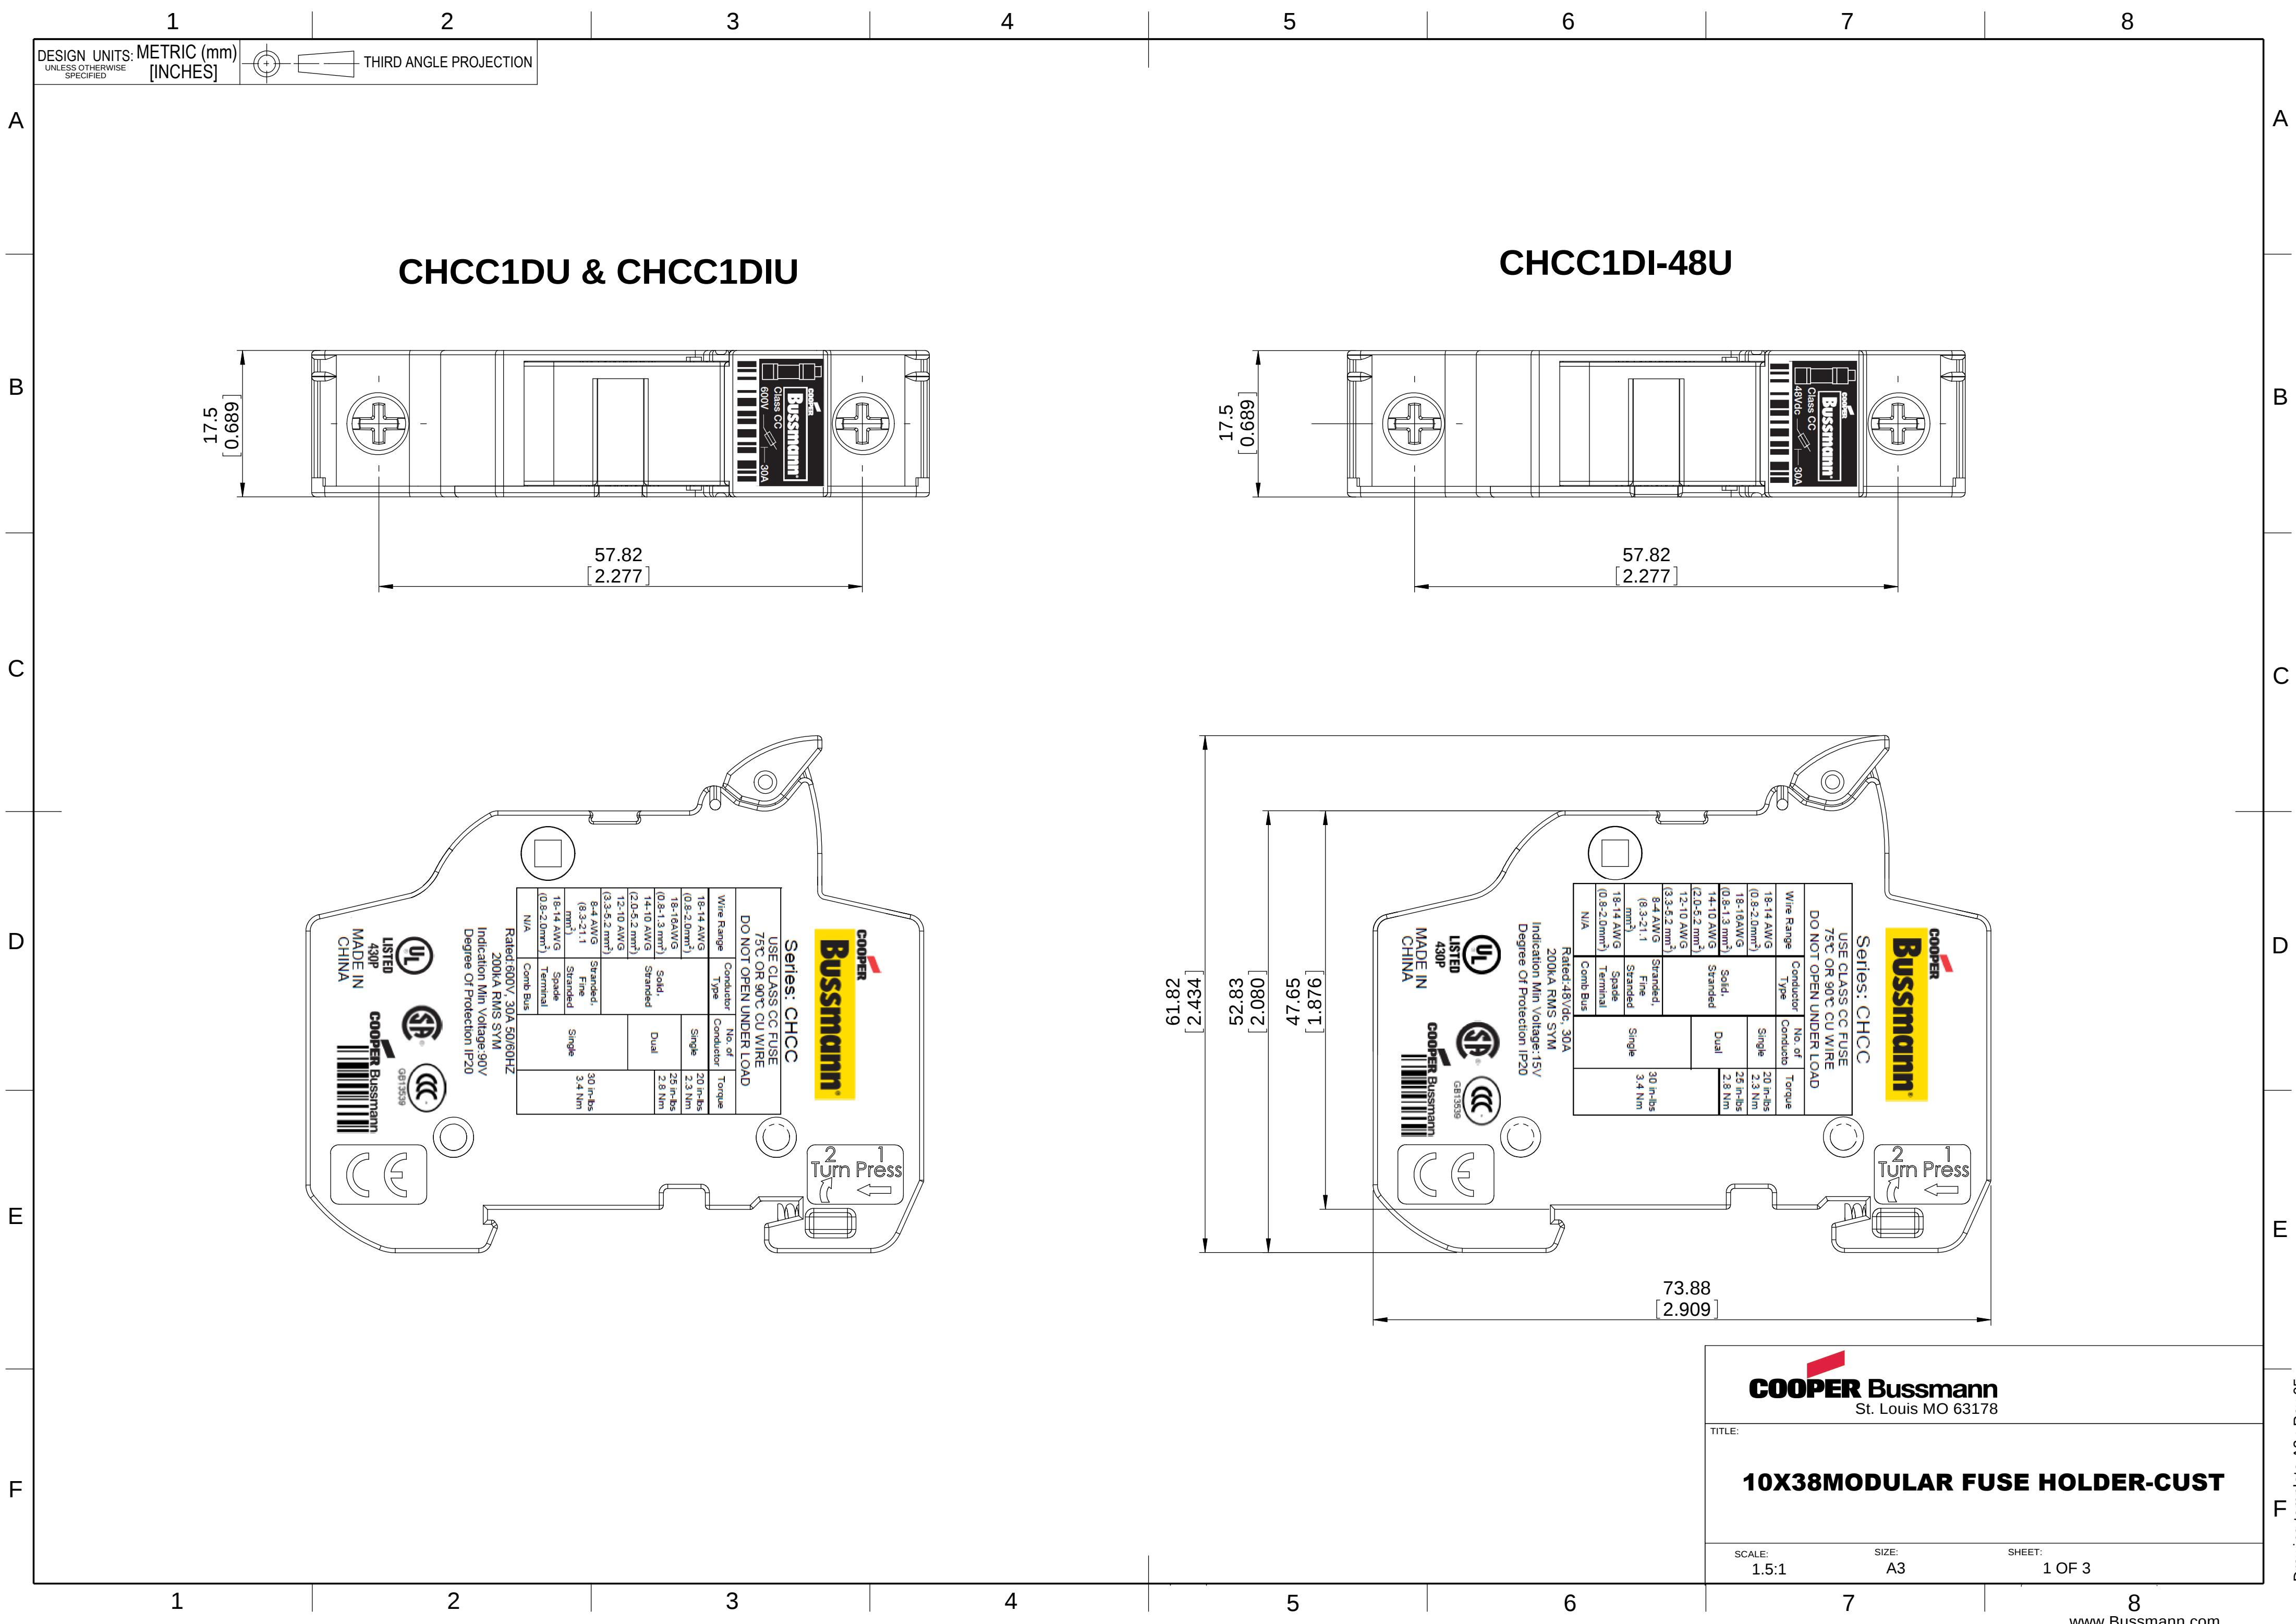

CHCC1DU & CHCC1DIU

CHCC1DI-48U

**COOPER Bussmann**

**Series: CHCC**

USE CLASS CC FUSE  
75°C OR 90°C CU WIRE  
DO NOT OPEN UNDER LOAD

| Wire Range                           | Conductor Type                | No. of Conductor | Torque              |
|--------------------------------------|-------------------------------|------------------|---------------------|
| 18-14 AWG (0.8-2.0mm <sup>2</sup> )  | Solid                         | Single           | 20 in-lbs<br>2.3 Nm |
| 18-16AWG (0.8-1.3 mm <sup>2</sup> )  |                               | Dual             | 25 in-lbs<br>2.8 Nm |
| 14-10 AWG (2.0-5.2 mm <sup>2</sup> ) |                               | Stranded         | Single              |
| 12-10 AWG (3.3-5.2 mm <sup>2</sup> ) |                               |                  |                     |
| 8-4 AWG (8.3-21.1 mm <sup>2</sup> )  |                               |                  |                     |
| 18-14 AWG (0.8-2.0mm <sup>2</sup> )  | Stranded, Fine Spade Terminal | Single           | 3.4 Nm              |
| N/A                                  | Comb Bus                      |                  |                     |

Rated 600V, 30A 50/60HZ  
200kA RMS SYM  
Indication Min Voltage 90V  
Degree Of Protection IP20

**COOPER Bussmann**  
430P  
LISTED  
MADE IN CHINA

**COOPER Bussmann**  
6813539

**CE**

1 Turn Press  
2

**COOPER Bussmann**

**Series: CHCC**

USE CLASS CC FUSE  
75°C OR 90°C CU WIRE  
DO NOT OPEN UNDER LOAD

| Wire Range                           | Conductor Type                | No. of Conductor | Torque              |
|--------------------------------------|-------------------------------|------------------|---------------------|
| 18-14 AWG (0.8-2.0mm <sup>2</sup> )  | Solid                         | Single           | 20 in-lbs<br>2.3 Nm |
| 18-16AWG (0.8-1.3 mm <sup>2</sup> )  |                               | Dual             | 25 in-lbs<br>2.8 Nm |
| 14-10 AWG (2.0-5.2 mm <sup>2</sup> ) |                               | Stranded         | Single              |
| 12-10 AWG (3.3-5.2 mm <sup>2</sup> ) |                               |                  |                     |
| 8-4 AWG (8.3-21.1 mm <sup>2</sup> )  |                               |                  |                     |
| 18-14 AWG (0.8-2.0mm <sup>2</sup> )  | Stranded, Fine Spade Terminal | Single           | 3.4 Nm              |
| N/A                                  | Comb Bus                      |                  |                     |


Rated 48Vdc - 30A  
200kA RMS SYM  
Indication Min Voltage 15V  
Degree Of Protection IP20

**COOPER Bussmann**  
430P  
LISTED  
MADE IN CHINA

**COOPER Bussmann**  
6813539

**CE**

1 Turn Press  
2

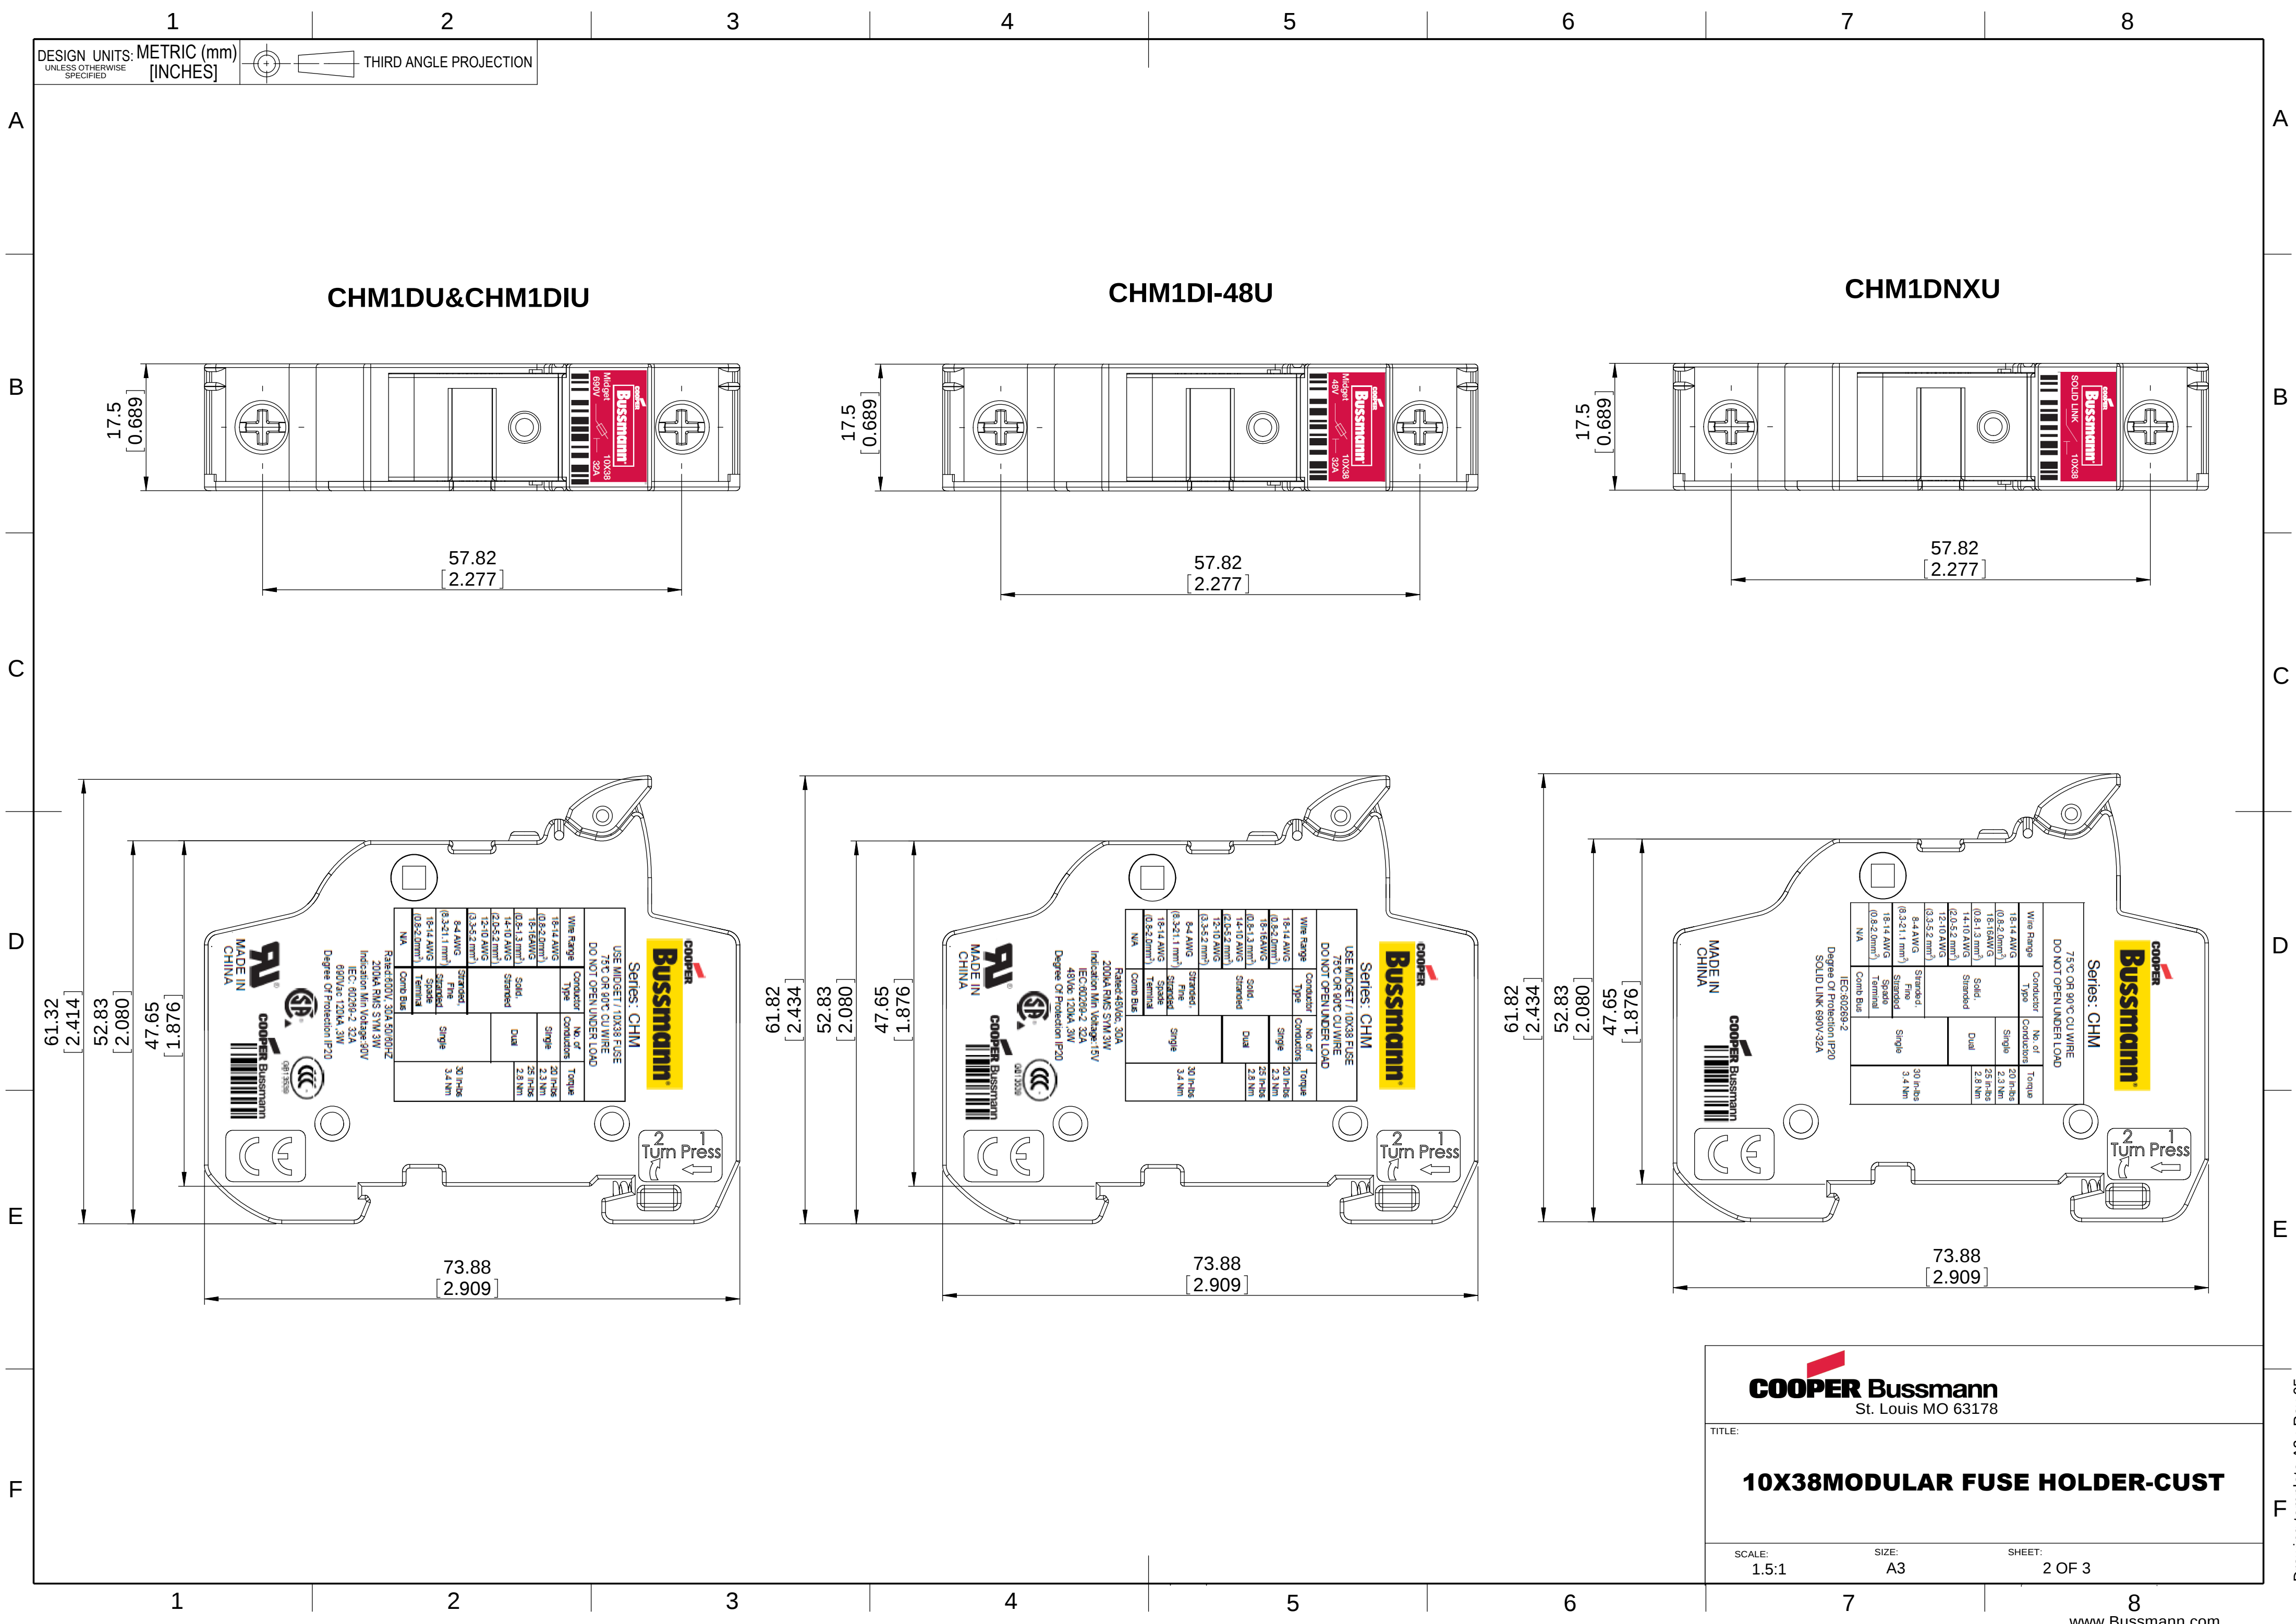

CHM1DU&CHM1DIU

CHM1DI-48U

CHM1DNXU



St. Louis MO 63178

TITLE:

10X38MODULAR FUSE HOLDER-CUST

SCALE:



1.5:1

SIZE:

A3

SHEET:

2 OF 3

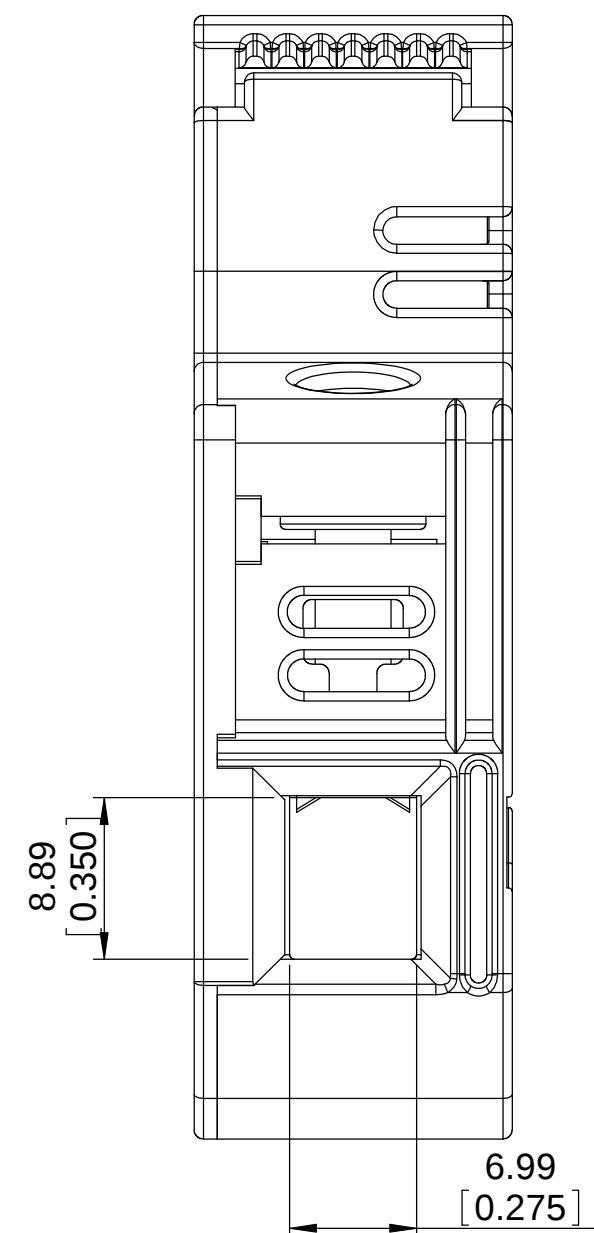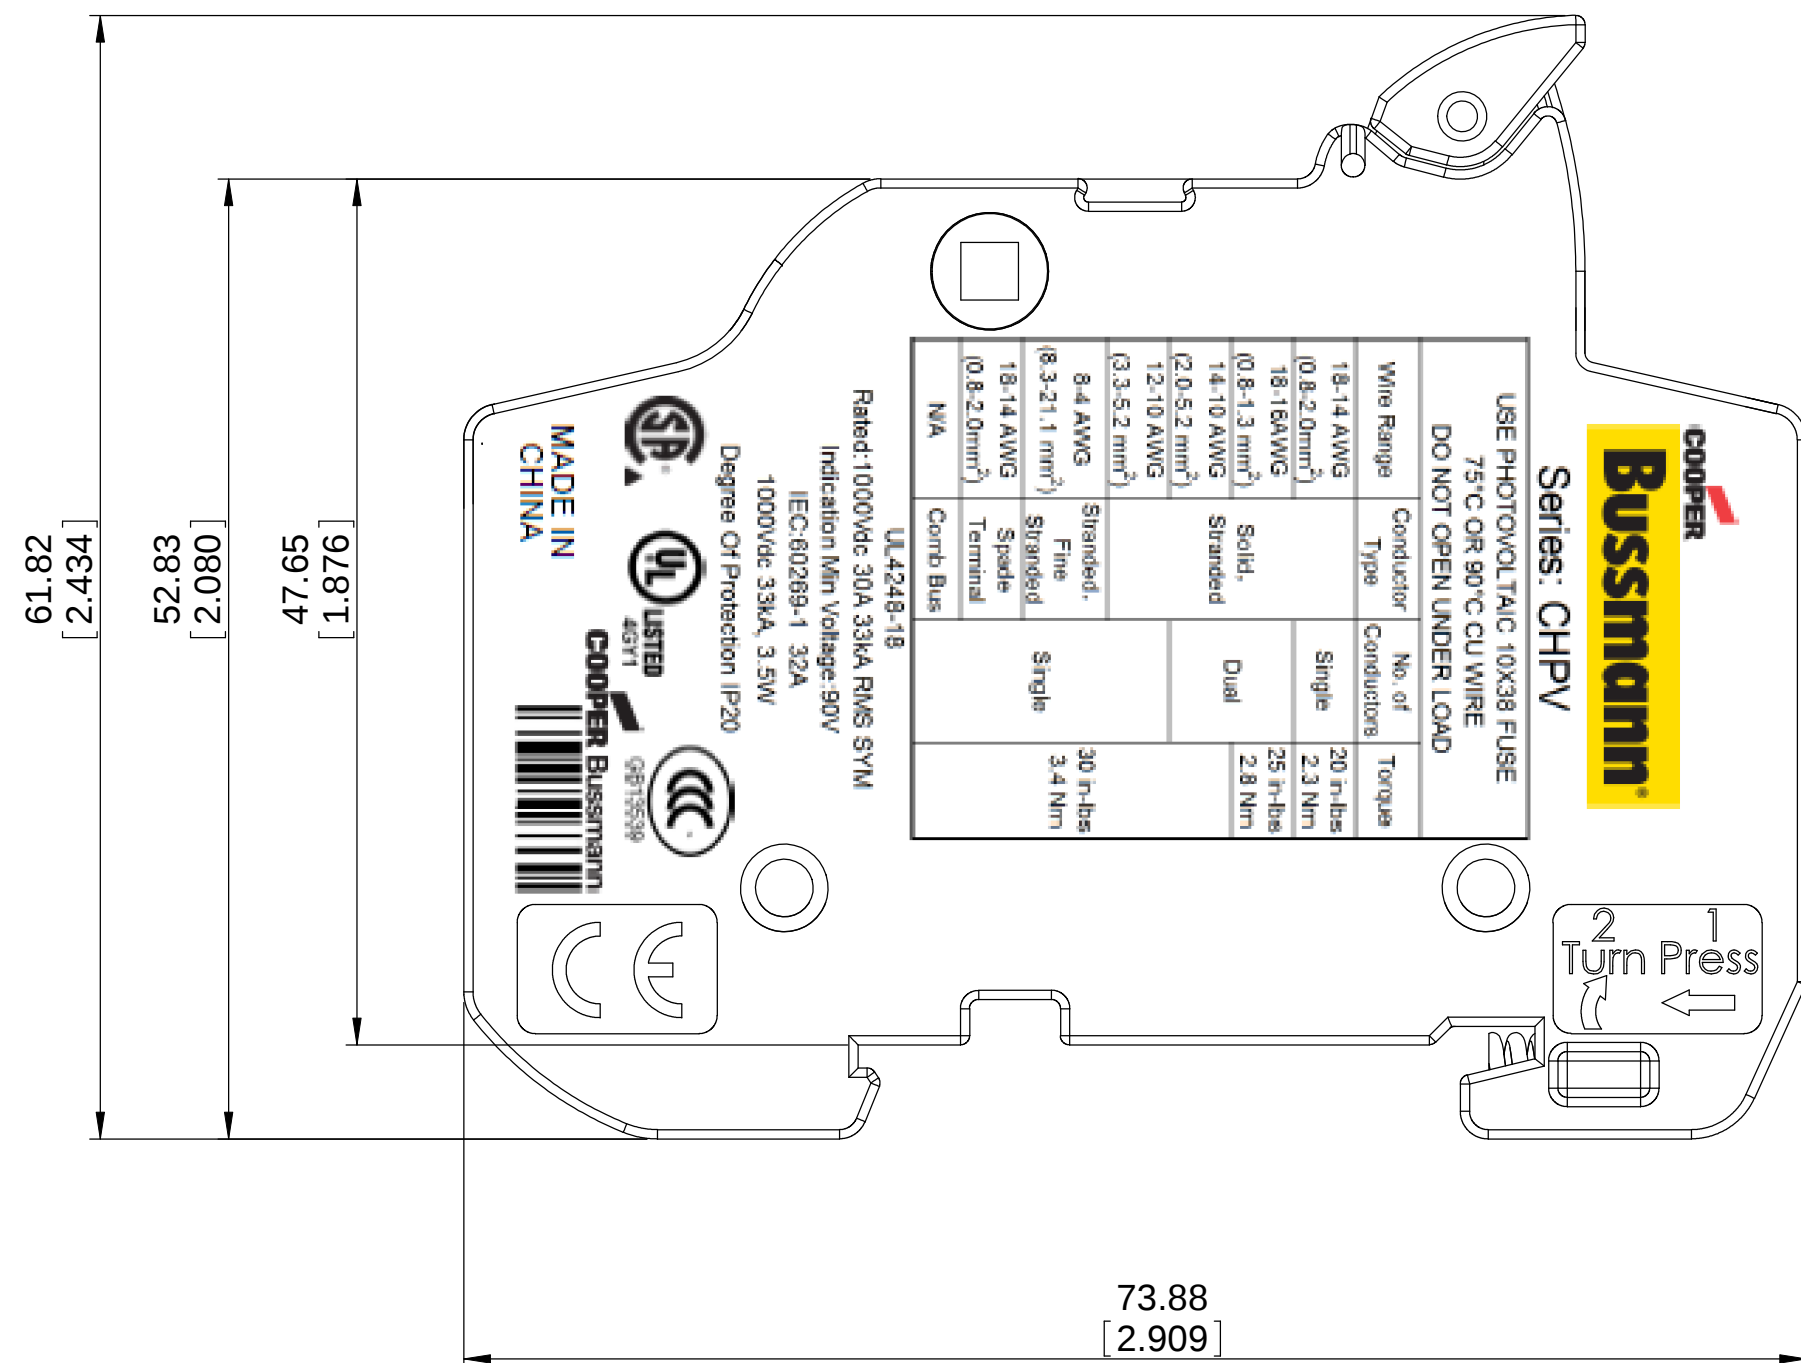

TITLE:

**10X38MODULAR FUSE HOLDER-CUST**

www.Bussmann.com