


Surface Mount Glass Passivated Junction Fast Switching Rectifier

SUPERECTIFIER®



DO-213AB

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	1.0 A
V_{RRM}	50 V to 1000 V
I_{FSM}	30 A
t_{rr}	150 ns, 250 ns, 500 ns
V_F	1.3 V
T_J max.	175 °C
Package	DO-213AB (GL41)
Diode variation	Single die

TYPICAL APPLICATIONS

For use in fast switching rectification of power supply, inverters, converters, and freewheeling diodes for consumer, automotive and telecommunication.

FEATURES

- Superectifier structure for high reliability condition
- Ideal for automated placement
- Fast switching for high efficiency
- Low leakage current
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Meets MSL level 1, per J-STD-020, LF maximum peak of 250 °C
- AEC-Q101 qualified
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT

MECHANICAL DATA

Case: DO-213AB, molded epoxy over glass body
Molding compound meets UL 94 V-0 flammability rating
Base P/N-E3 - RoHS-compliant, commercial grade
Base P/NHE3 - RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102
E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Polarity: Two bands indicate cathode end - 1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	BYM 11-50	BYM 11-100	BYM 11-200	BYM 11-400	BYM 11-600	BYM 11-800	BYM 11-1000	UNIT
FAST SWITCHING TIME DEVICE: 1ST BAND IS RED		RGL41A	RGL41B	RGL41D	RGL41G	RGL41J	RGL41K	RGL41M	
Polarity color bands (2 nd band)		Gray	Red	Orange	Yellow	Green	Blue	Violet	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_T = 55$ °C	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	30							A
Maximum full load reverse current, full cycle average at $T_A = 55$ °C	$I_{R(AV)}$	50							μA
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 175							°C

**ELECTRICAL CHARACTERISTICS** ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	TEST CONDITIONS		SYMBOL	BYM 11-50	BYM 11-100	BYM 11-200	BYM 11-400	BYM 11-600	BYM 11-800	BYM 11-1000	UNIT
Maximum instantaneous forward voltage	1.0 A		V _F	1.3							V
Maximum DC reverse current at rated DC blocking voltage		T _A = 25 °C	I _R	5.0							μA
		T _A = 125 °C		50							
Maximum reverse recovery time	I _F = 0.5 A, I _R = 1.0 A, I _{rr} = 0.25 A		t _{rr}	150				250	500		ns
Typical junction capacitance	4.0 V, 1 MHz		C _J	15							pF

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	BYM 11-50	BYM 11-100	BYM 11-200	BYM 11-400	BYM 11-600	BYM 11-800	BYM 11-1000	UNIT
Maximum thermal resistance	R _{θJA} (1)	75							°C/W
	R _{θJT} (2)	30							

Notes

- (1) Thermal resistance from junction to ambient, 0.24" x 0.24" (6.0 mm x 6.0 mm) copper pads to each terminal
(2) Thermal resistance from junction to terminal, 0.24" x 0.24" (6.0 mm x 6.0 mm) copper pads to each terminal

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
RGL41J-E3/96	0.114	96	1500	7" diameter plastic tape and reel
RGL41J-E3/97	0.114	97	5000	13" diameter plastic tape and reel
BYM11-600-E3/96	0.114	96	1500	7" diameter plastic tape and reel
BYM11-600-E3/97	0.114	97	5000	13" diameter plastic tape and reel
RGL41JHE3/96 ⁽¹⁾	0.114	96	1500	7" diameter plastic tape and reel
RGL41JHE3/97 ⁽¹⁾	0.114	97	5000	13" diameter plastic tape and reel
BYM11-600HE3/96 ⁽¹⁾	0.114	96	1500	7" diameter plastic tape and reel
BYM11-600HE3/97 ⁽¹⁾	0.114	97	5000	13" diameter plastic tape and reel

Note

- (1) AEC-Q101 qualified

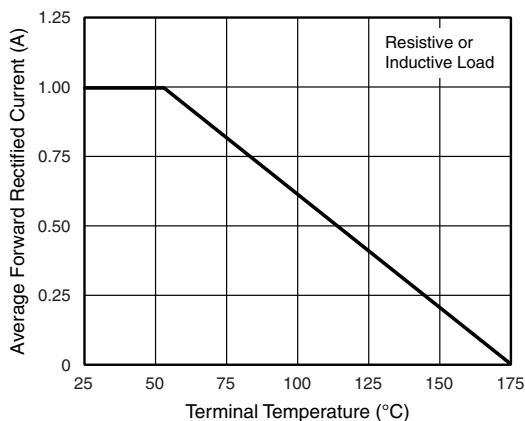
RATINGS AND CHARACTERISTICS CURVES ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

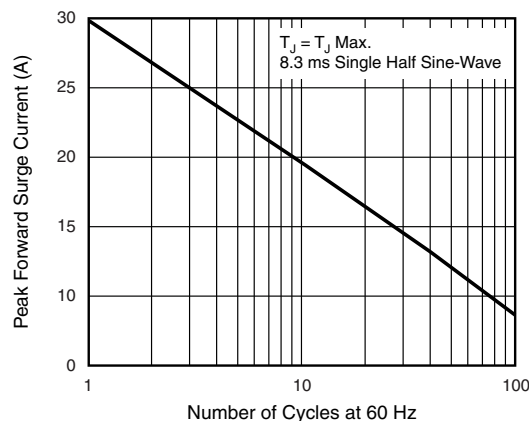


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

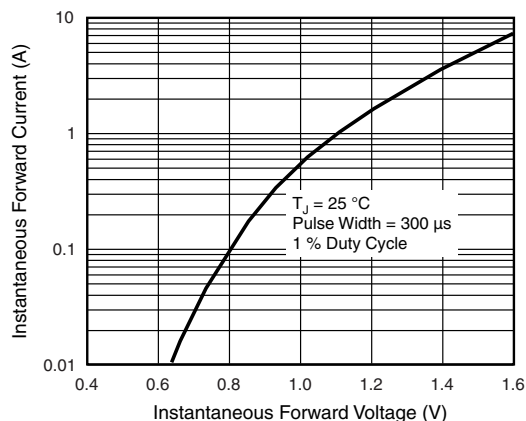


Fig. 3 - Typical Instantaneous Forward Characteristics

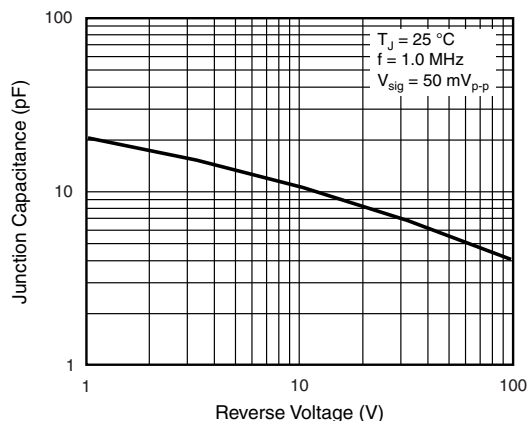


Fig. 5 - Typical Junction Capacitance

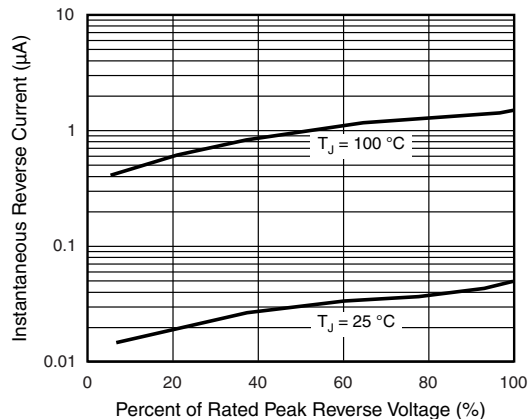


Fig. 4 - Typical Reverse Characteristics


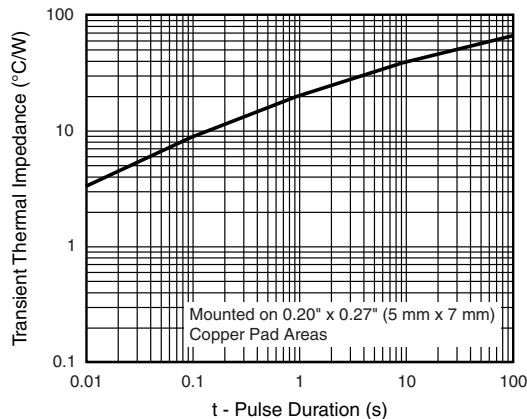


Fig. 6 - Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



Mounting Pad Layout

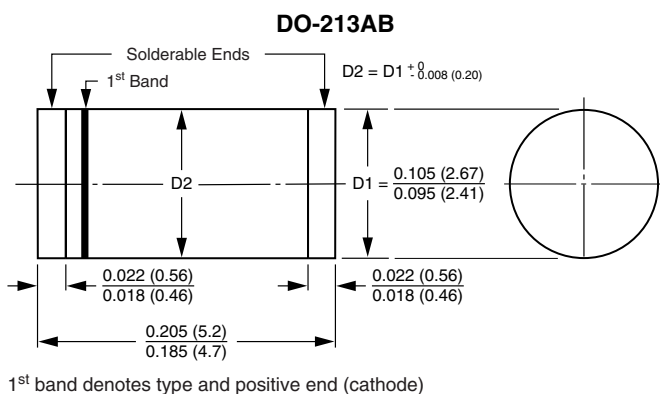