

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-1R2452-A2

REPLACES X114105-BZ

RELEASE NO. 204841

CATALOG LISTING

BZ-1R2452-A2

PAGE 1 OF 1

M

ISSUE
2

REVISIONS

A 0033747

MST
12SEP07

CHECK

12SEP07

PSR

CHECK

7 FEB 02


SAV

CHECK

7 FEB 02

RASTER
DRAWN

CSL 7 FEB 02

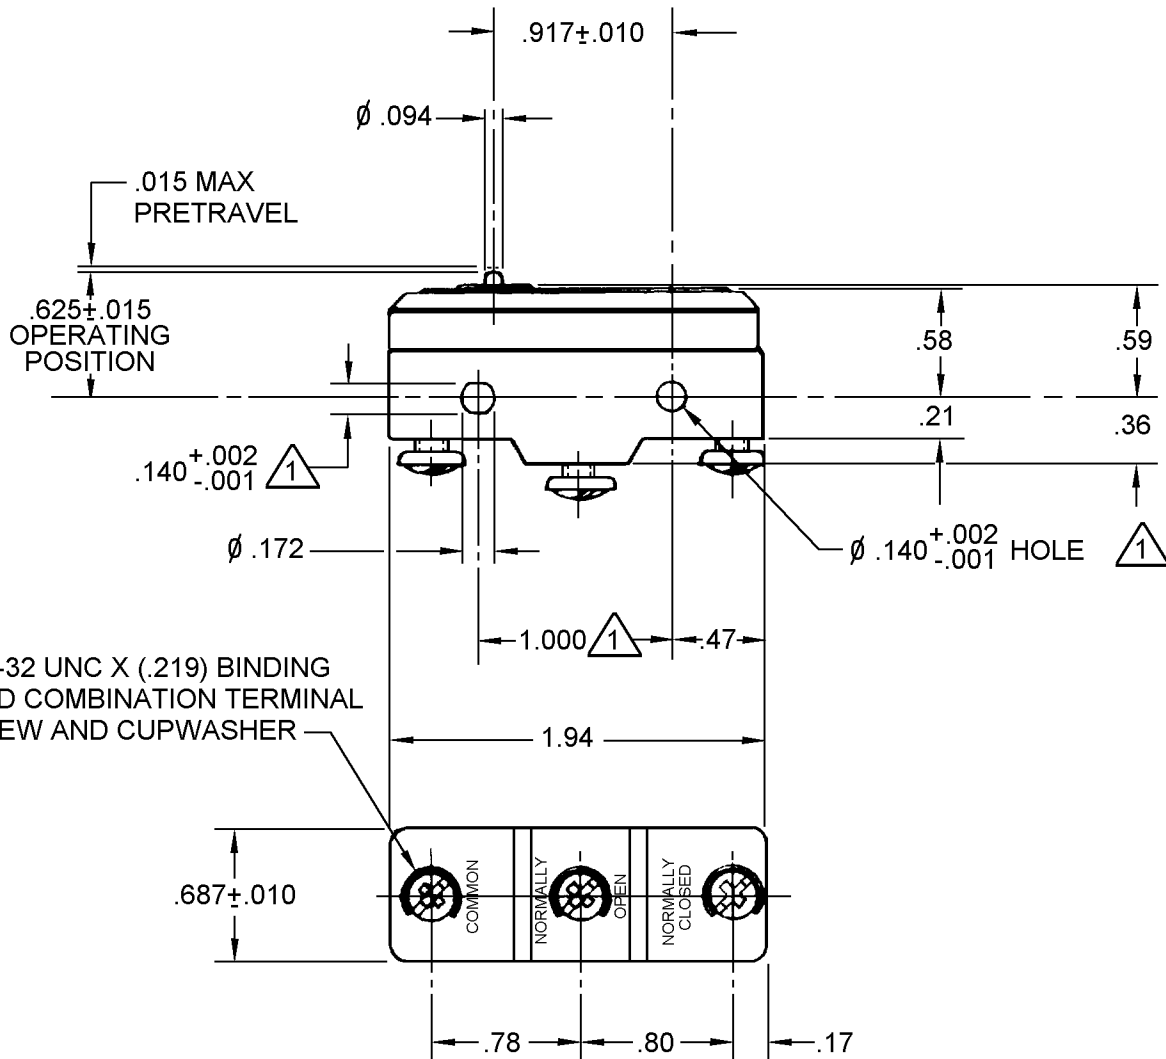


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 4 OZ MAX
RELEASE FORCE - - - - - 2 1/2 OZ MIN
DIFFERENTIAL TRAVEL - - - .001 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L95
10A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC

-L310-



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT .063 LB