

MICRO SWITCHA DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN.

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-1R95-A21**BZ-1R95-A21**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
7

REPLACES

SR 8921

RELEASE NO.

RP

CHECK

DES

28 MAR 60

CHECK

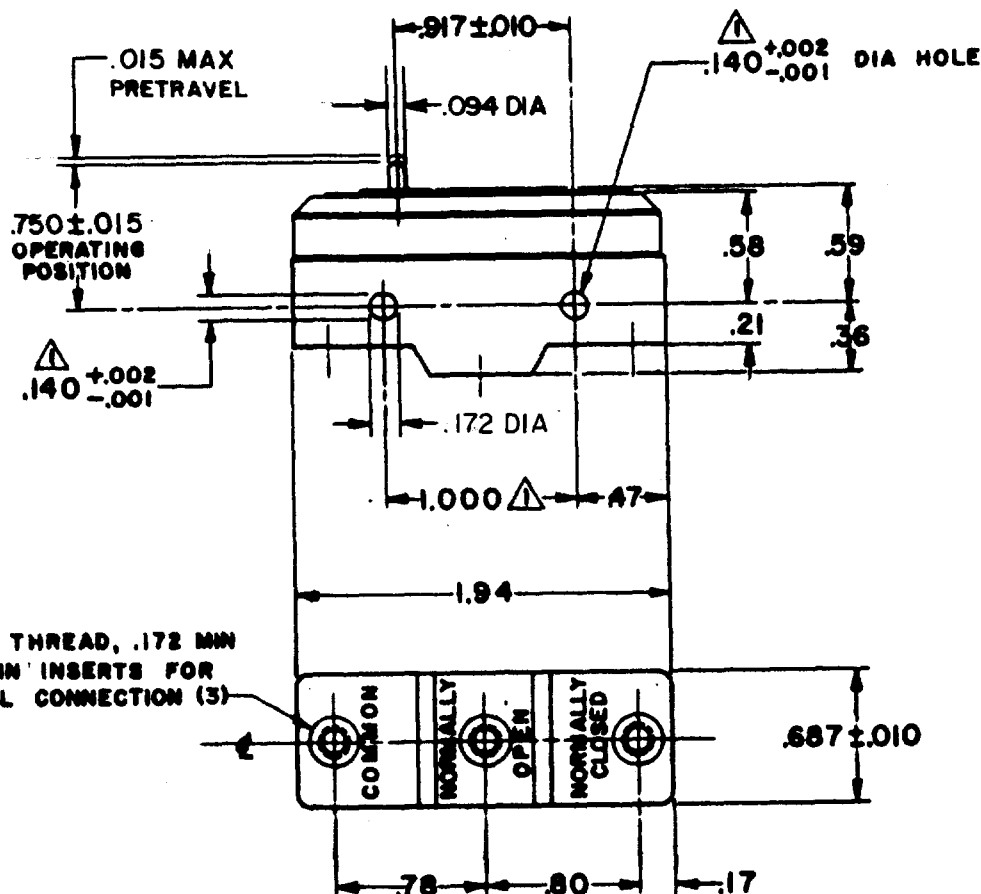
30 MAR 94

E

F

JAF

7 JAN 99

**NOTES**

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
2 - 6-32 UNC X .219 REF BINDING HEAD COMBINATION TERMINAL SCREW (3)
FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-10 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .001 MAX

OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA**CONTACT ARRANGEMENT**

S P D T

UL LISTED - FILE E12252
CODE L103 15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC

L288
L299
L306

CE

D

SP

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.000
TWO PLACE (.00) ±.010
THREE PLACE (.000) ±.000
ANGLES ±

WEIGHT

FORMTEK

0-50378

DRAWN

CHECK

28 MAR 60

L S D