

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING

BZ-1RW8255051T-S

BZ-1RW8255051T-S

PAGE 1 OF 1

RELEASE NO. PR-8526

REPLACES X70639-BZ

M

DRAWING
NUMBER

5

ISSUE

REVISIONS

A	C067209
J A P	2 MAY 90
B	CO- 68351-D
JWB	18 JUL 91
C	CO- 75204E
JWB	1 FEB 94
D	C093346
DLT	4 SEP 98

CHECK

CHECK

8 MAR 80

CEB

CHECK


MAR 80

J A P

FORMTEK

FO-52848-A

DRAWN

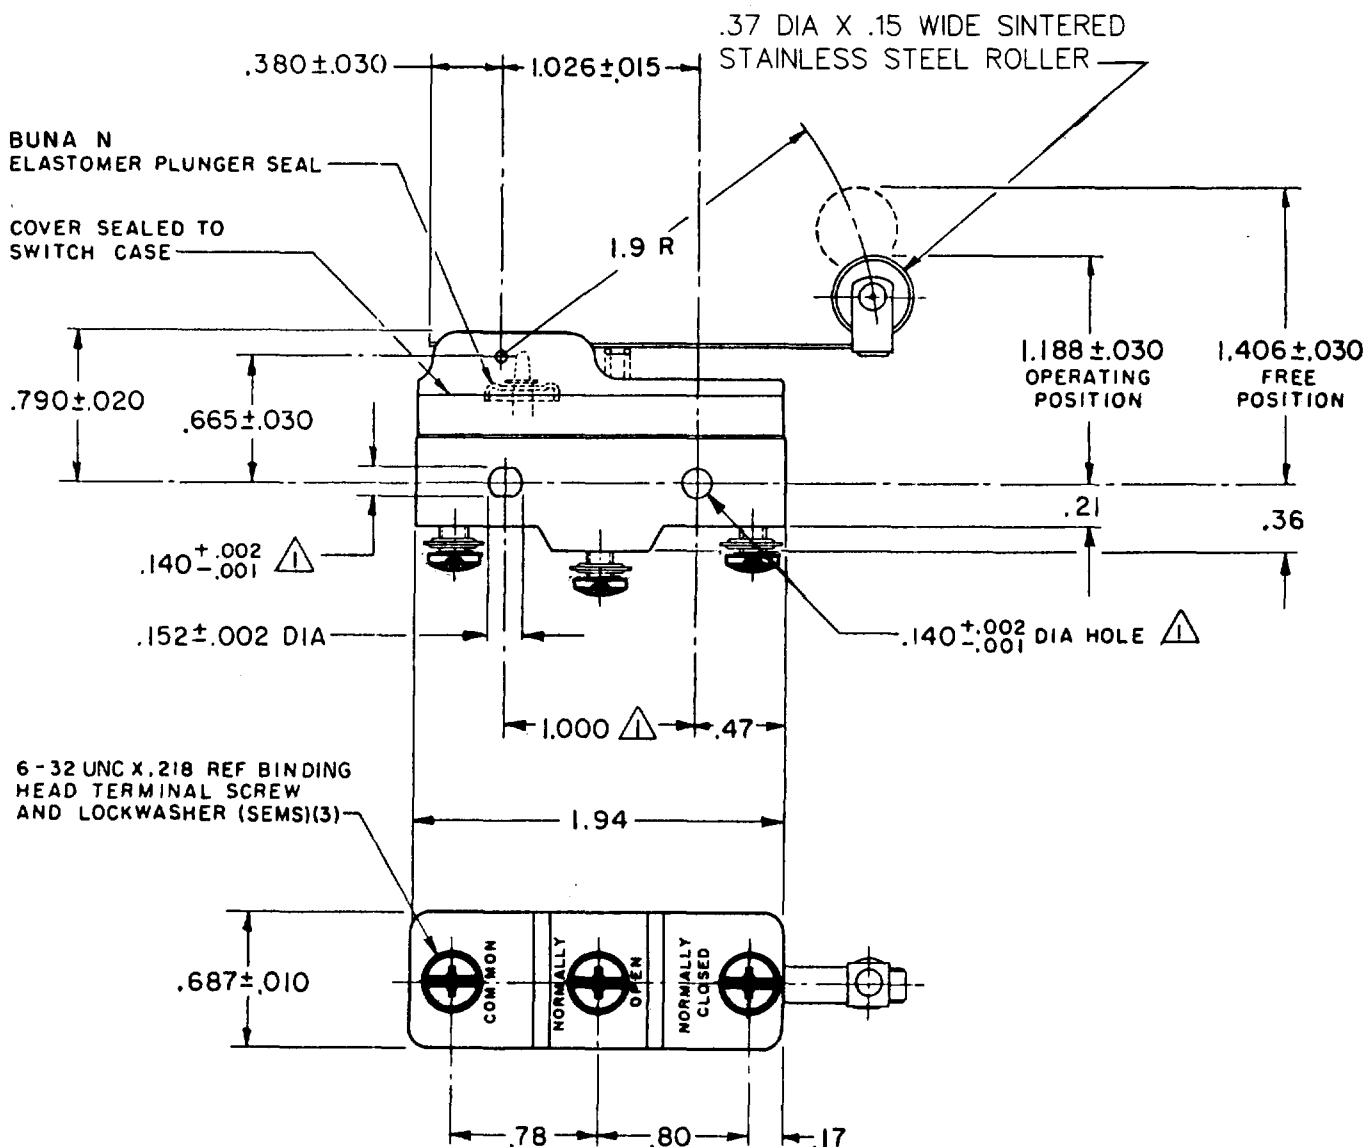


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ——— 3 OZ MAX
RELEASE FORCE ———— 3/4 OZ MIN
DIFFERENTIAL TRAVEL ——— .008—.020
OVERTRAVEL ———— .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L103

15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/04	X	0.01
ONE PLACE	X,X	0.4/016	X,X	0.01/016
TWO PLACES	X,X,X	0.15/006	X,X,X	0.001/015
THREE PLACES	X,X,X,X		X,X,X,X	0.15/005

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .079 LB