

**MICRO SWITCH**FREEPORT ILLINOIS
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2ADT1CATALOG LISTING
BZ-2ADT1

PAGE 1 OF 1

REPLACES

RELEASE NO. SR 10855

MDRAWING
NUMBER

8

ISSUE

REVISIONS

A	CO 19371	14 JUL 64
B	MBF	28424
C	SRH	26 JAN 71
D	CO 62404	29 JAN 88
E	CSL	20 JUL 92
F	REINST	12 JUL 94
G	200482	24 MAY 00

CHECK

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63


EAB

6-32UNC X .218 REF BINDER
HEAD TERMINAL SCREW AND
LOCKWASHER (SEMS) (4)


NOTE -

▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA
ON 1.000 ± .002 CENTERS

2 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER

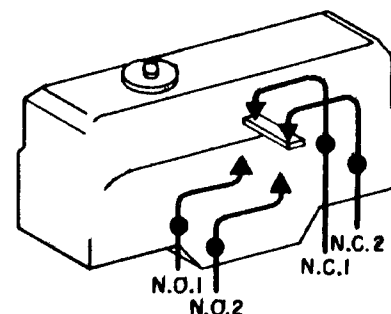

CIRCUIT DIAGRAM

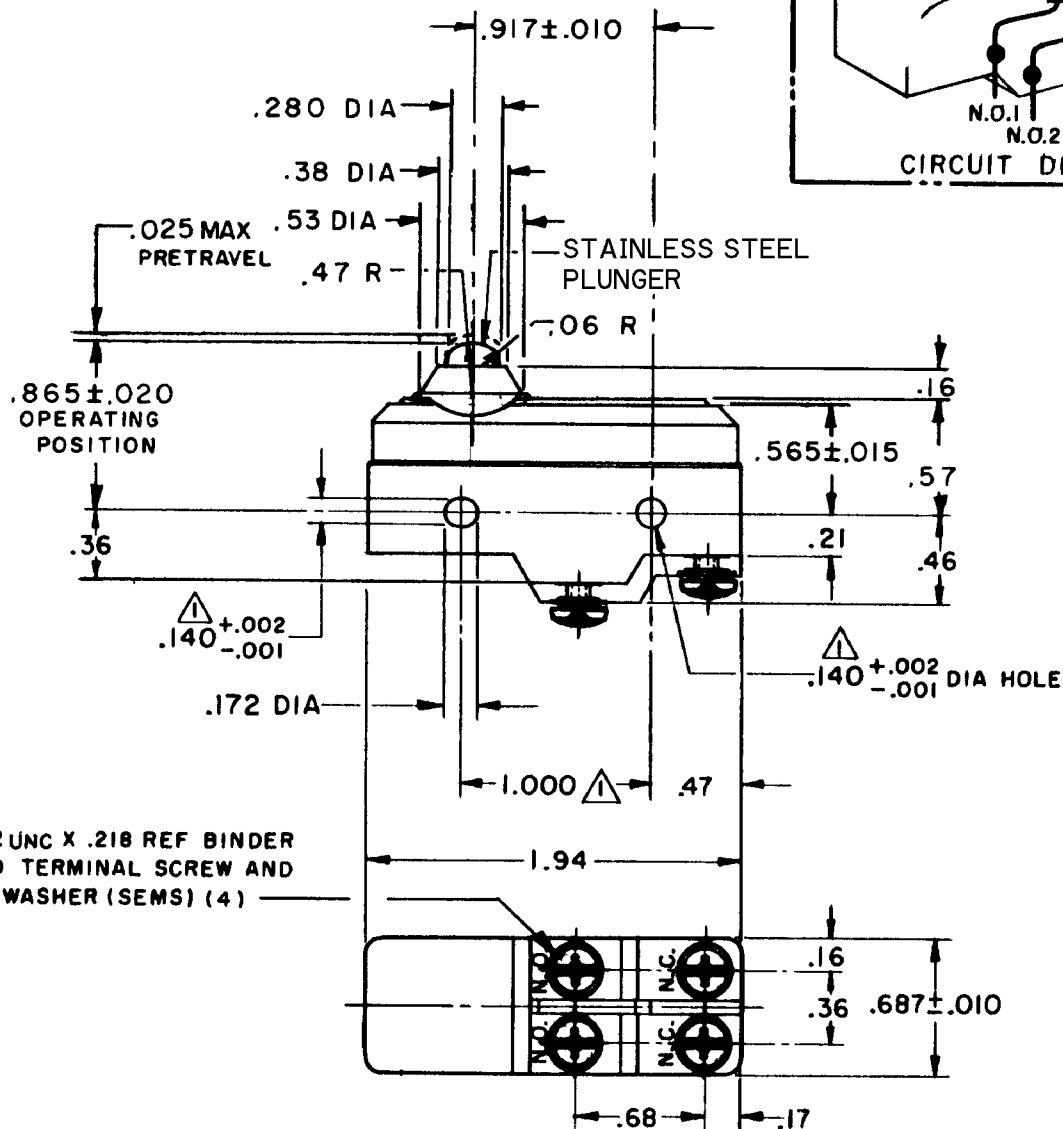

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 14 - 24 OZ

RELEASE FORCE — — — 4 OZ MIN

DIFFERENTIAL TRAVEL — — .0010 - .0035

OVERTRAVEL — — — .060 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAML73 15A 125, 250 OR 480 VAC
1A 125 VDC, 0.5A 250 VDC
1/4HP 125 VAC, 1/2HP 250 VAC**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±**WEIGHT**

FORMTEK

FO-50378

DRAWN

CHECK

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63

EAB

19 MAR 63