

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDERICK, ILLINOIS
FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2AQ784T

BZ-2AQ784T

M

DRAWING
NUMBER

ISSUE
3
3
3

REPLACES

RELEASE NO. S.R. 6403

CHECK

22 APR. 57

29 APR. 57

19 SEPT. 57

18 FEB. 58

3 MAR. 61


29 JAN. 88

29 JUN. 94

3 MAR. 95

REVISIONS

A	CORR.
K. A. F.	29 APR. 57
B	CO12064
L.C.S.	19 SEPT. 57
C	CO12095
J. E. C.	18 FEB. 58
D	CO15689
M.B.F.	3 MAR. 61
E	CO 28424
S.R.H.	29 JAN. 88
F	CO62404
T.L.B.	29 JAN. 88
G	CO-69351-D
J.W.B.	18 JUL. 91
H	CO 77426-B
D.L.T.	29 JUN. 94
J.C.O.	CO 80017
C.S.L.	3 MAR. 95

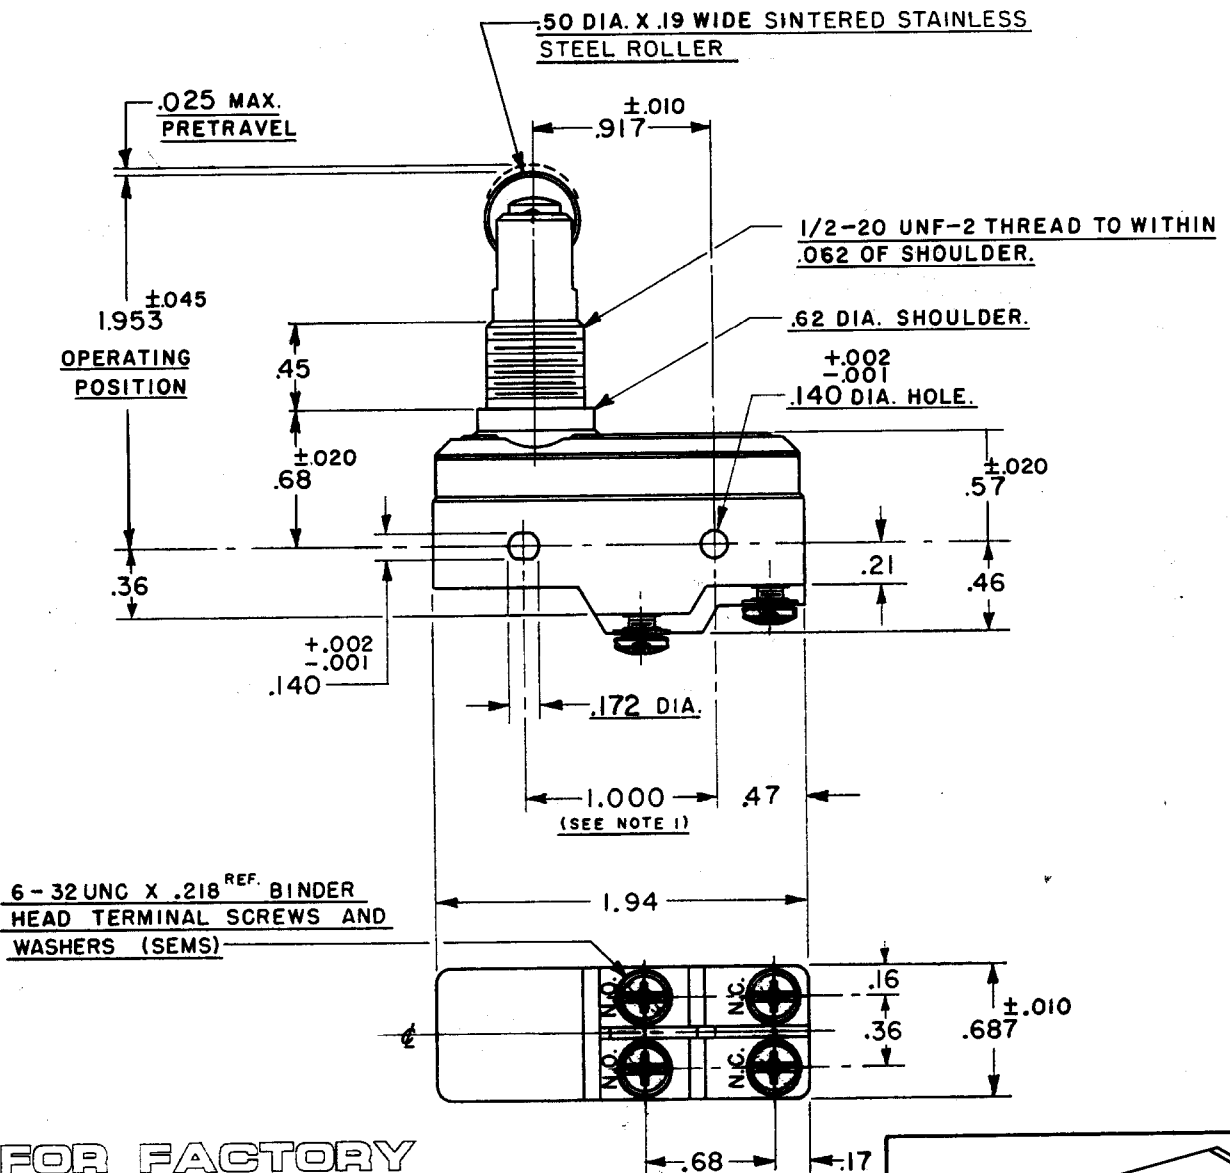


FOR FACTORY
USE ONLY

NOTE -

- 1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.
- 2-SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

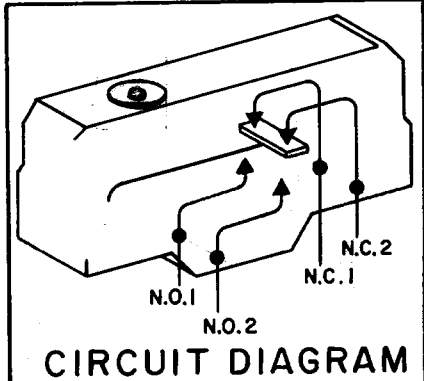

CIRCUIT DIAGRAM

CHARACTERISTICS

OPERATING FORCE ——— 14-24 OZ.

RELEASE FORCE ——— 4 OZ. MIN.

② DIFFERENTIAL TRAVEL ——— .001-.004

OVERTRAVEL ——— .140 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

UNDERWRITERS' LAB. INC. LISTED RATING
-L 73-
15 A-125, 250, OR 480 VAC
1 A-125 VDC; 0.5 A-250 VDC
1/4 HP-125 VAC; 1/2 HP-250 VAC



③ ④

SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT