


MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDERICK, ILLINOIS


FED. MFR. CODE 91929

SWITCH - BASIC

BZ-2AW855T1

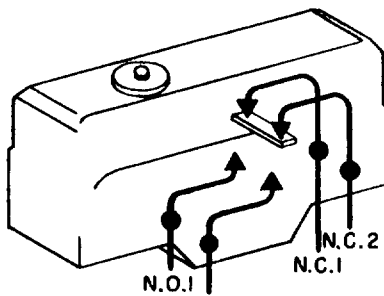

CIRCUIT DIAGRAM

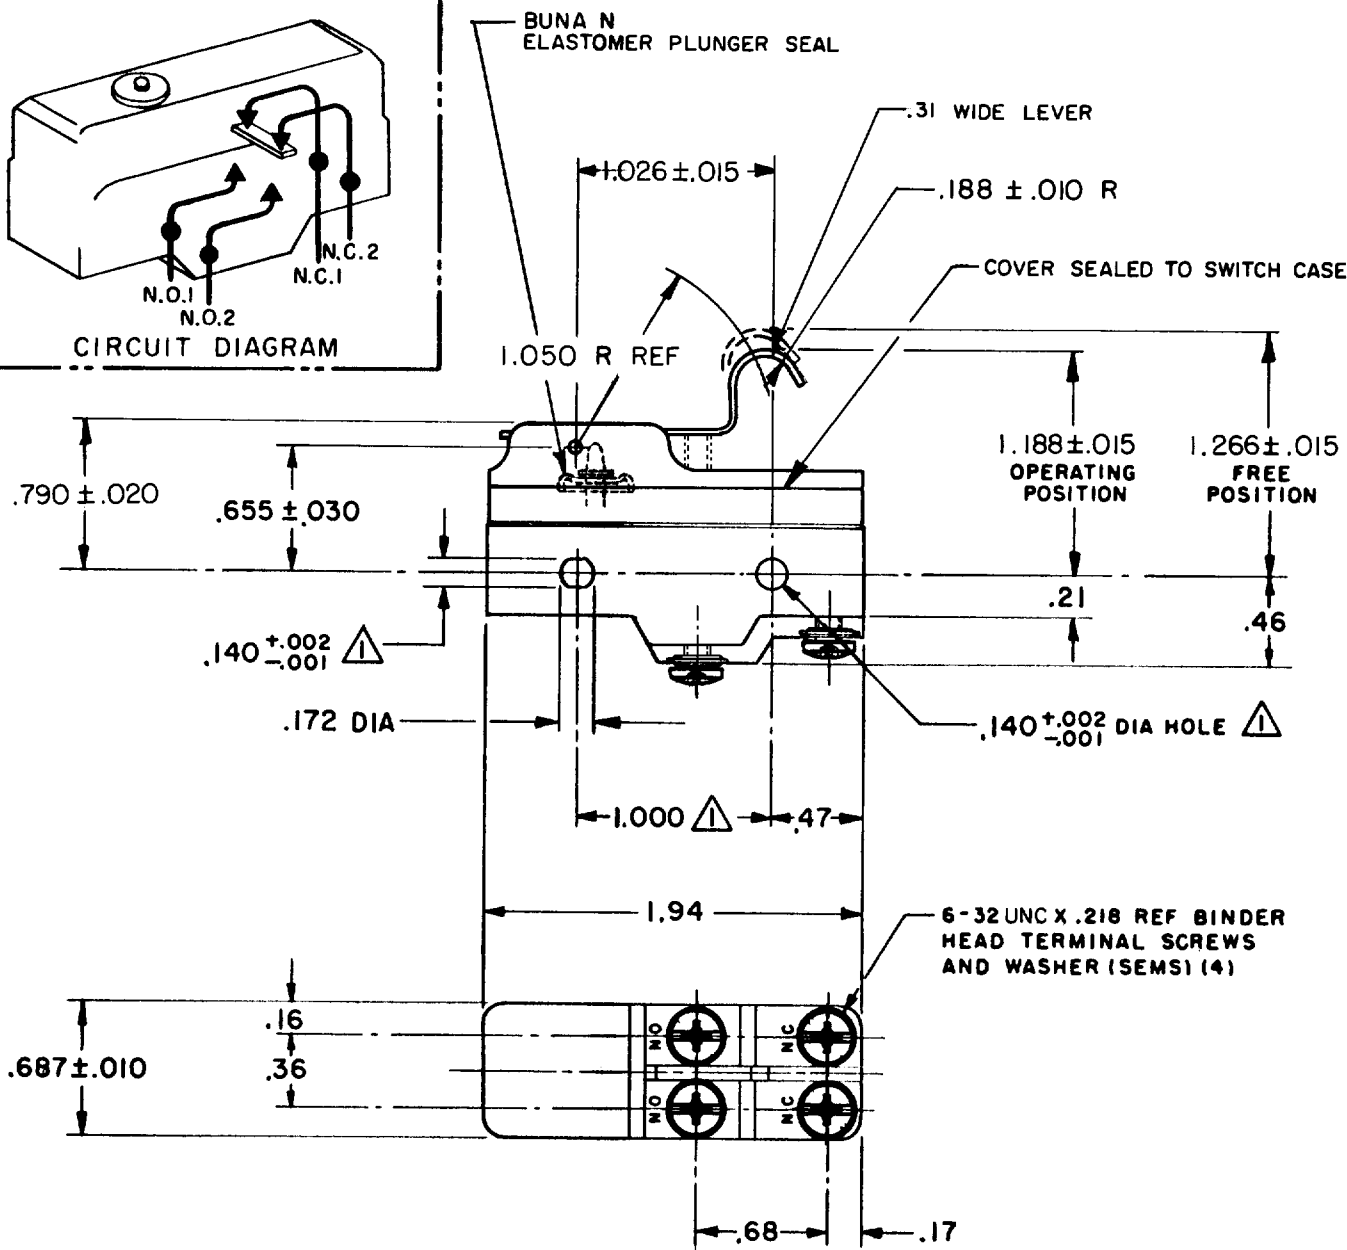

NOTES



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

2 - SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER

3 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 8 1/2 OZ MAX

RELEASE FORCE - - - - - 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL - - - - .008 - .030

OVERTRAVEL - - - - - .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

L73

15A 125, 250 OR 480 VAC

1A 125 VDC, 0.5A 250 VDC

1/4 HP 125 VAC, 1/2 HP 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT



CATALOG LISTING
BZ-2AW855T1
PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REVISIONS

A CO 28424

SRH 26 JAN 71

B CO322293

BEN 13 JUL 73

C CO67209

JAP 2 MAY 90

D CO-69351-D

JWB 18 JUL 91

E 207440

CSL 14 FEB 03

RASTER

FO-80378

(M) X 25616

ISSUE 1

REPLACES

RELEASE NO. 8R-10322

CHECK

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62

5, JUNE '62