


MICRO SWITCH

A DIVISION OF AMYNEAPLES-HONEYWELL REGULATOR COMPANY
PROBOPORT, ILLINOIS

SWITCH - BASIC


FED. MFR. CODE 91929

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

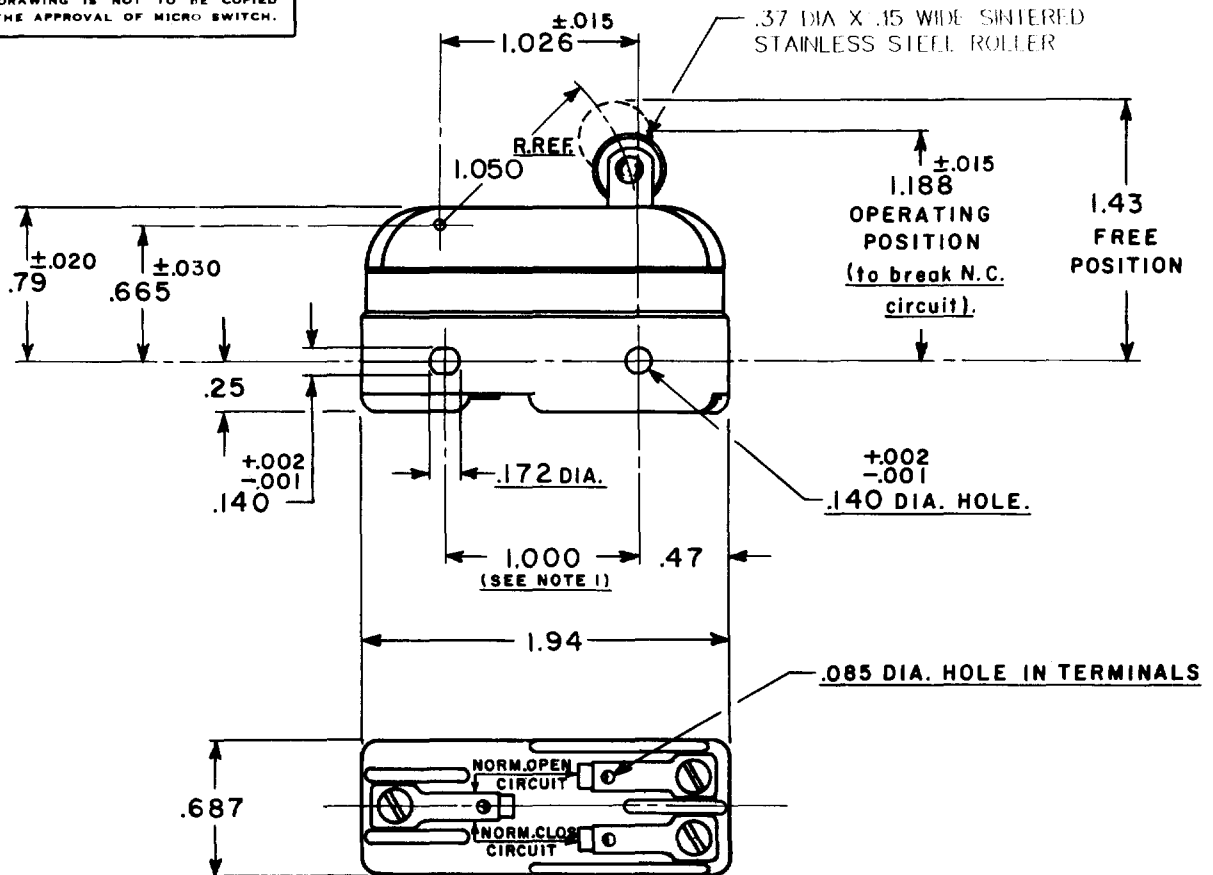


NOTE
1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000±.002 CENTERS

SEQUENCE OF OPERATION

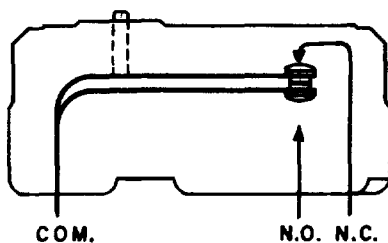


COM. N.O. N.C.

UNOPERATED POSITION

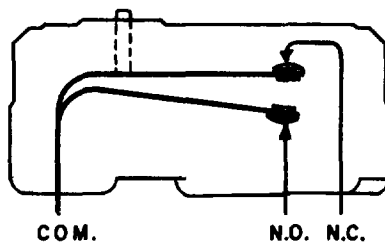

COM. N.O. N.C.

INTERMEDIATE POSITION

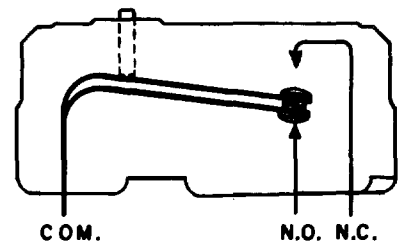

COM. N.O. N.C.

FULLY OPERATED POSITION

CHARACTERISTICS

OPERATING FORCE-- (to break N.C. circuit) 6 1/2 OZ. MAX.
RELEASE FORCE-- (to break N.O. circuit) 1 1/2 OZ. MIN.
DIFFERENTIAL TRAVEL - (between breaking of N.C. and breaking of N.O. circuits) .145 MAX.
OVERTRAVEL- (after breaking N.C. circuit) .094 MIN.
Lever travel between operating positions and between release positions .040-.100

ELECTRICAL DATA

CONTACT ARRANGEMENT S.P.D.T. Make before break
UNDERWRITERS' LAB. INC. LISTED RATING -LS- 10 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC

SCALE- FULL

DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT .065 LB.

BZ-2GW822
 PAGE 1 OF 1
 DRAWING NUMBER
 ISSUE 11
 REVISIONS
 A C.O. 9714 K. A. F. 12 OCT. 58
 B C.O. 11096 O.M.W. 4 FEB. 57
 C C.O. 11152 O.M.W. 19 FEB. 57
 D C.O. 13870 AFP 12 AUG 59
 E C.O. 14559 M.B.F. 5 MAY 60
 F C.O. 21824 R.F.R. 8 SEP 66
 G CO-75204B DAW 1 FEB 94
 H CO-77591 DAW 22 JUN 94
 J CO-94212-G DLT 1 OCT 99
 FORMTEK
 FO-50378
 DRAWN
 K. A. F. 12 OCT. 56
 CHECK
 G.C.H. 13 OCT. 56
 CHECK
 M.J.L. 13 OCT. 56
 CHECK
 RELEASE NO.
 REPLACES ISSUE 2
 (M) BZ-2GW822