

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2R244T**BZ-2R244T**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
10

REPLACES

RELEASE NO.


CHECK

REVISIONS

A	CO 15200 W L K 6 MAR 64	18AUG04
B	CO21530 W E G 11 AUG 66	AK
C	CO- 6035-D JWB 18 JUL 91	CHECK
D	CO93346 DLT 28 AUG 98	18AUG04
E	0007223 AS 18AUG04	9 MAR 64
		DAW
		CHECK
		6 MAR 64
		W L K
		DRAWN

FORMTEK

FO-50378

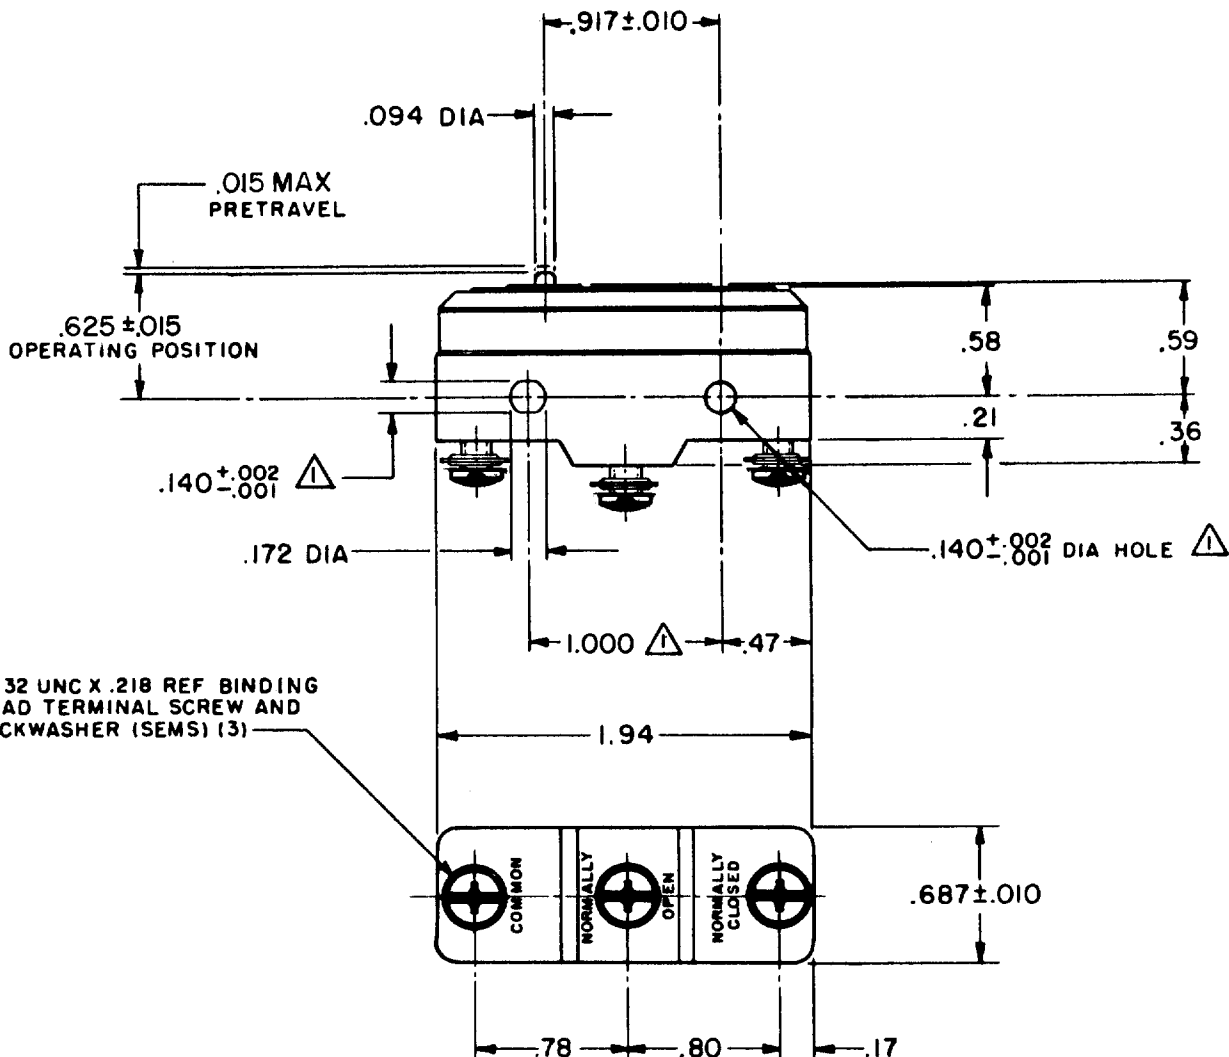

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F FOR 100 HOURS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 4 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATING 5 A-125, 250 OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - .0004-.0020	-L35- -L288- CE SP	TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL - - - - - .005 MIN		WEIGHT .060 LB