

**MICRO SWITCH**FREEPORT ILLINOIS, U.S.A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929**SWITCH - BASIC**

CATALOG LISTING


**BZ - 2R276 - P5****BZ - 2R276 - P5****M**DRAWING  
NUMBER

5

ISSUE


PAGE 1 OF 1

RELEASE NO. PR-7124 REPLACES X-67684-BZ

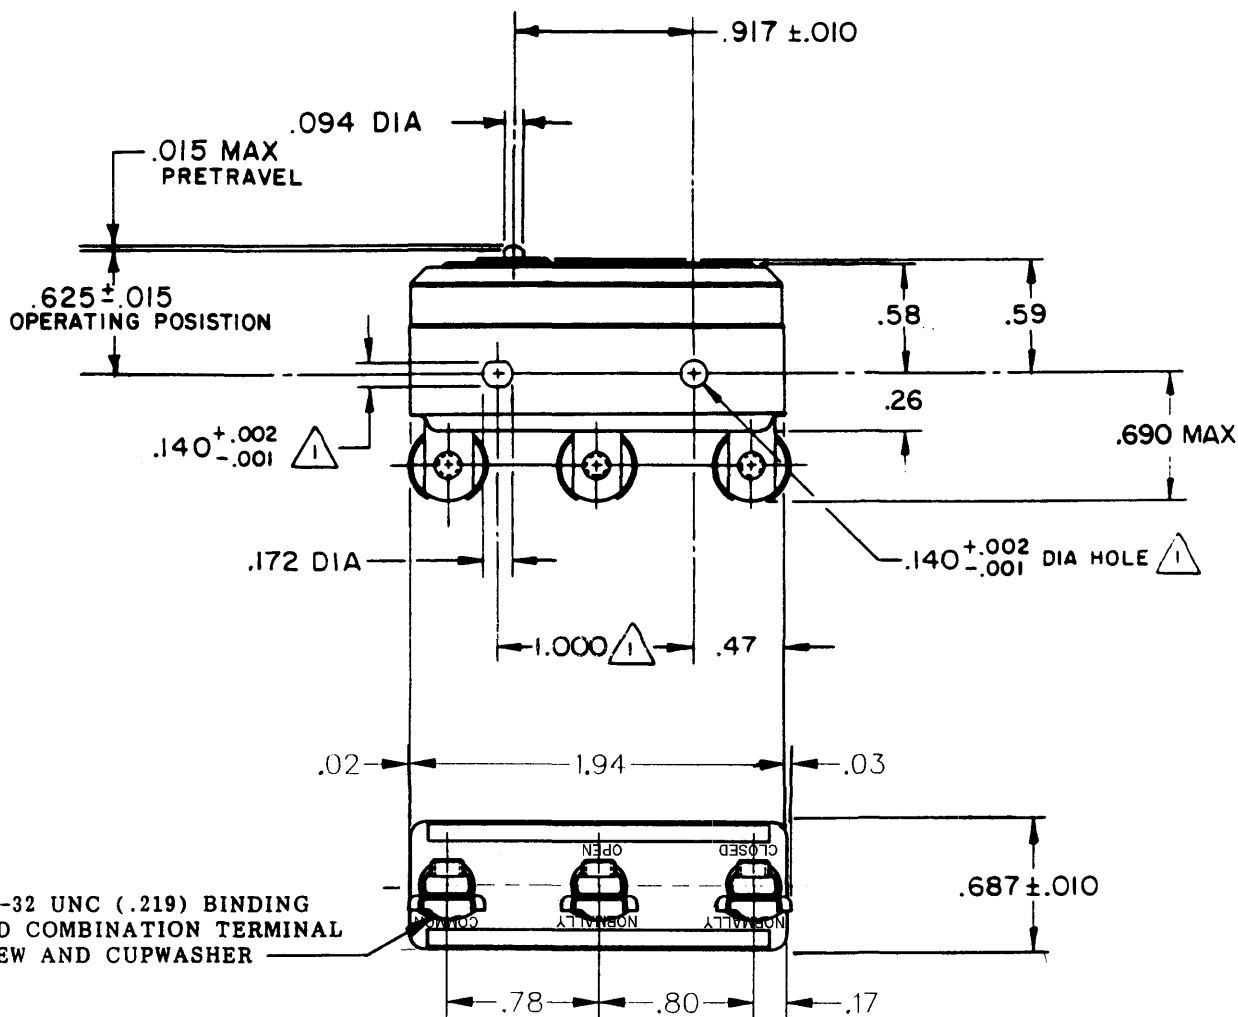

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE----- 9-13 OZ

RELEASE FORCE----- 4 OZ MIN

DIFFERENTIAL TRAVEL-- .0004-.0020

OVERTRAVEL----- .005 MIN

**ELECTRICAL DATA**CONTACT ARRANGEMENT  
S P D TUL LISTED - FILE E12252  
15A - 125, 250 OR 480 VAC, 2A - 600 VAC  
1/8HP - 125 VAC; 1/4HP - 250 VAC  
CODE L74 1/2A - 125 VDC; 1/4A - 250 VDCL288  
L299  
L306

16A 250V ~ T85 5E4

**SCALE FULL**

DO NOT SCALE PRINT

**TOLERANCES**

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED TOLERANCES ARE:

|            | ONE PLACE | TWO PLACES | THREE PLACES | ANGLES |
|------------|-----------|------------|--------------|--------|
| INCH       | .1        | .01        | .001         |        |
| MILLIMETER | 2.5       | .25        | .025         |        |

DESIGN UNITS ☐ METRIC ☒ US CUSTOMARY

WEIGHT .075 LB

FORMTEK

FO-52848-A

DRAWN

S J S/27 APR 78

CHECK C E B

29 APR 78

CHECK

D L T

1 SEP 98

CHECK

C O 93346

G J W

2 MAY 96

K D R

3 MAR 94

CO-77863

CO-753678

CO-73287-G

20 OCT 93

A L