

MICRO SWITCH
a Honeywell Division


FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2R383-A2

AGR9510

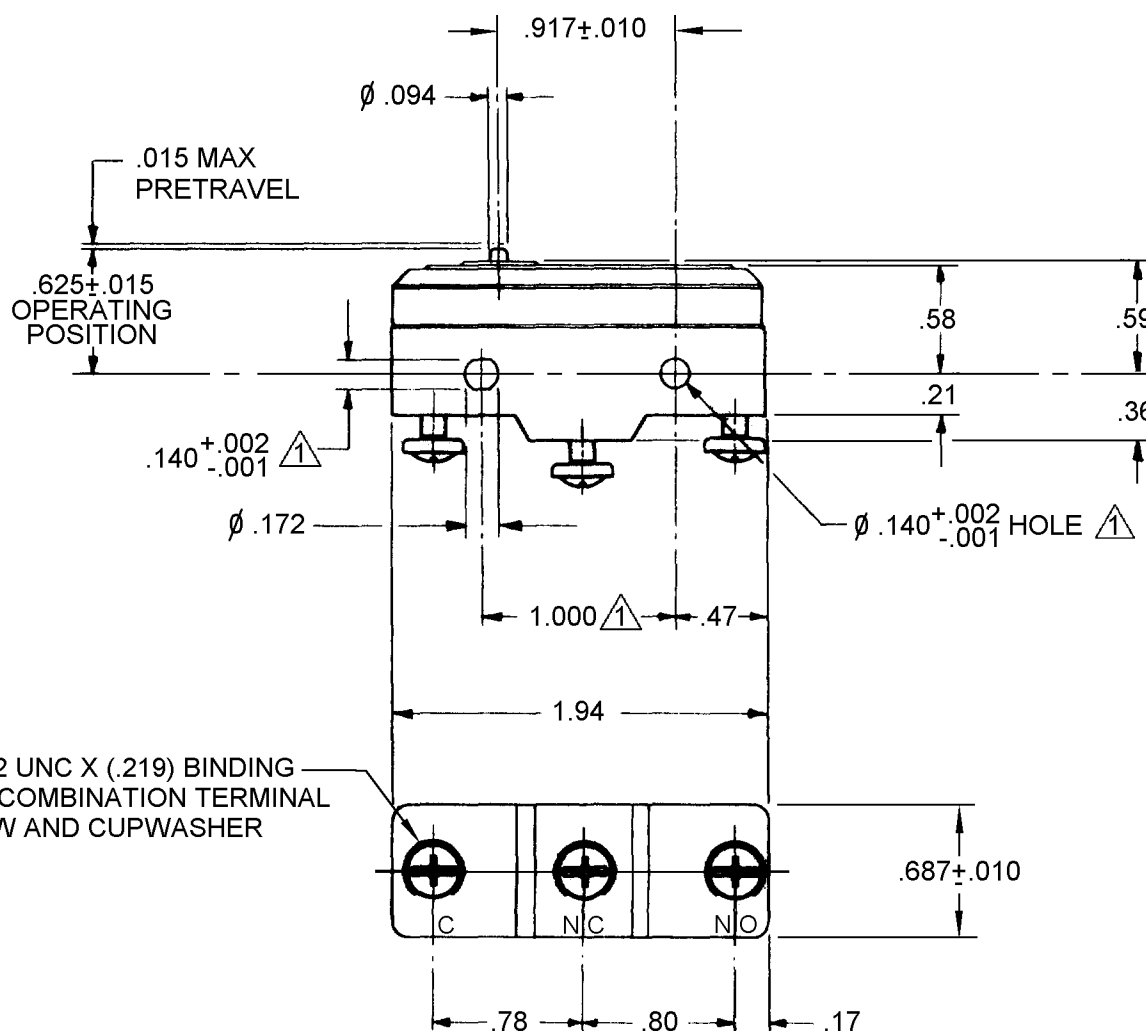

3X 6-32 UNC X (.219) BINDING
HEAD COMBINATION TERMINAL
SCREW AND CUPWASHER


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - TERMINAL IDENTIFICATION: C - COMMON, NC - NORMALLY CLOSED, NO - NORMALLY OPEN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .0004-.0020
OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

L74 15A 125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

-L288-
-L306-
-L315-



EN⁰⁵
EC



16A 250V $\sim$ T85 5E4

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT .063 LB

CATALOG LISTING
BZ-2R383-A2
PAGE 1 OF 1

ISSUE
C

RJ

REPLACES X115276-BZ

0002708

29 AUG 05

CHECK

REVISIONS

A 0003616

AS
FEB 04

B 0015138

SPK
29 AUG 05

MDM

CHECK

18 DEC 03

MDM

CHECK

18 DEC 03

C SL

18 DEC 03

RASTER
DRAWN