

MICRO SWITCHFREEPORT ILLINOIS, U. S. A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**SWITCH-BASIC**

CATALOG LISTING

BZ-2R53-A2**AGQ2000****BZ-2R53-A2**

PAGE 1 OF 1

MDRAWING
NUMBER

4

ISSUE

REPLACES

RELEASE NO. PR-5264

CHECK

REVISIONS

A	CO-3287-J
	JAL
	22 NOV 93
B	C093346
	DLT
	4 SEP 98
C	0017978
	LKM
	20 FEB 06

CHECK

20 OCT 75

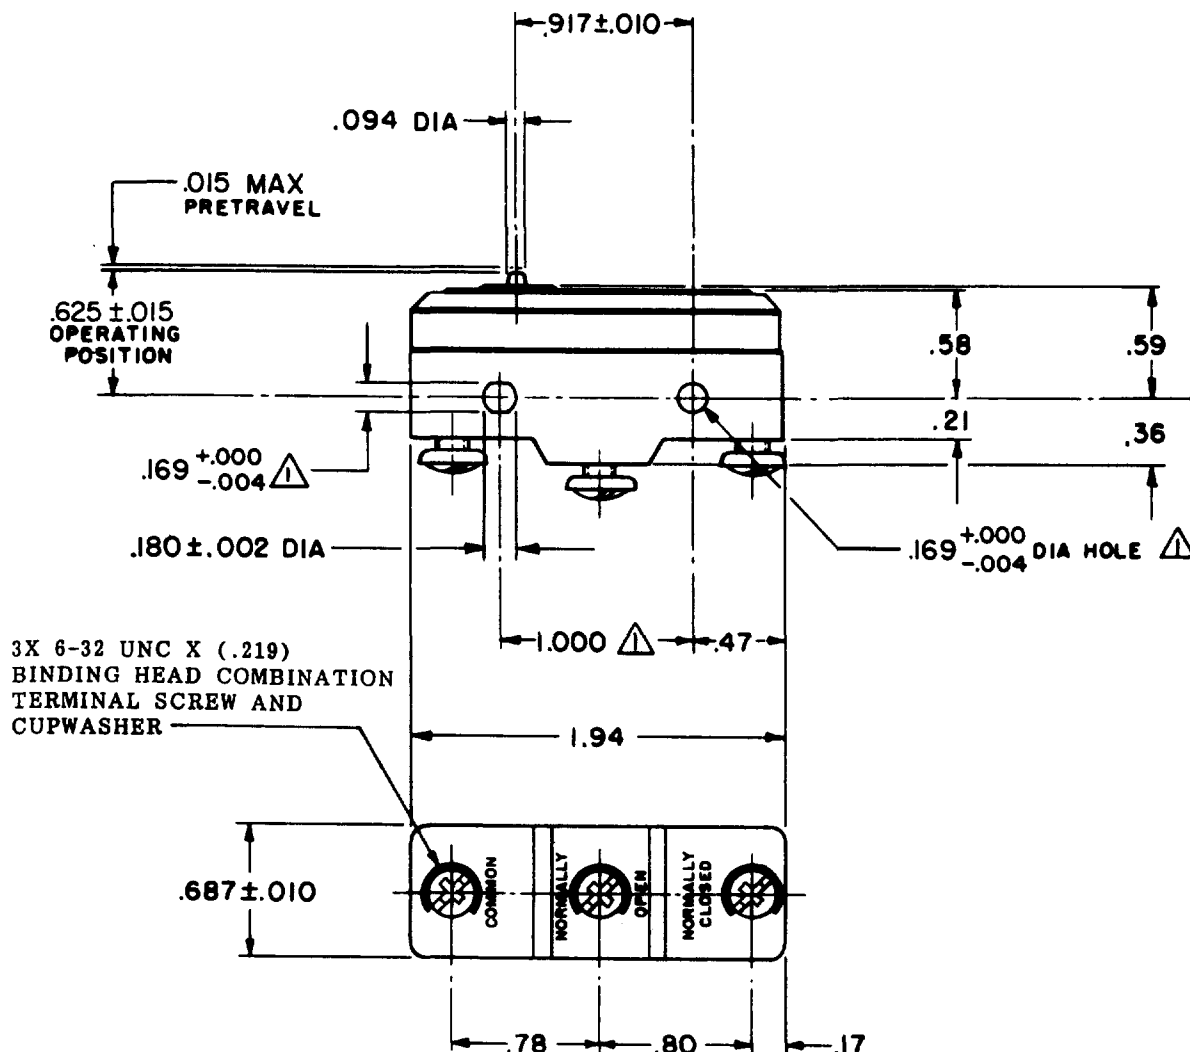
DRAW

75

OCT

W17


D J

**NOTE -**

$\triangle$ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF $.165$ MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE — — — — — 9-13 OZ

RELEASE FORCE — — — — — 4 OZ MIN

DIFFERENTIAL TRAVEL — — .0004-.0020

OVERTRAVEL — — — — — .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T15A-125, 250 OR 480 VAC
1/8HP-125 VAC; 1/4HP-250 VAC
CODE L96 1/2A-125 VDC; 1/4A-250 VDCL288
L315
L30616A 250V $\sim$ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.01/03
ONE PLACE	X,X	0.47/018	X,X	0.36/015
TWO PLACES	X,X,X	0.157/008	X,X,X	0.13/005
THREE PLACES	X,X,X,X		X,X,X,X	
ANGLES				

DESIGN UNITS ☐ SI METRIC☒ US CUSTOMARY

WEIGHT .063 LB.

FORMTEK

FO-52848-A

DRAWN