

# MICRO SWITCH

FREEPORT ILLINOIS, U.S.A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

BZ-2R55156T-S

FAA-PMA

M BZ-2R55156T-S

PAGE 1 OF 1

DRAWING  
NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR-6746

CHECK

### REVISIONS

|   |                                 |
|---|---------------------------------|
| A | CO-78656-B<br>JALA<br>25 JUL 95 |
| B | C093346<br>DLT<br>12 AUG 98     |
| C | C093821<br>DLT<br>1 FEB 99      |

CHECK

DEC 77

DEC 77

DEC 77

DEC 77


DEC 77

DEC 77

DEC 77

DEC 77

DEC 77

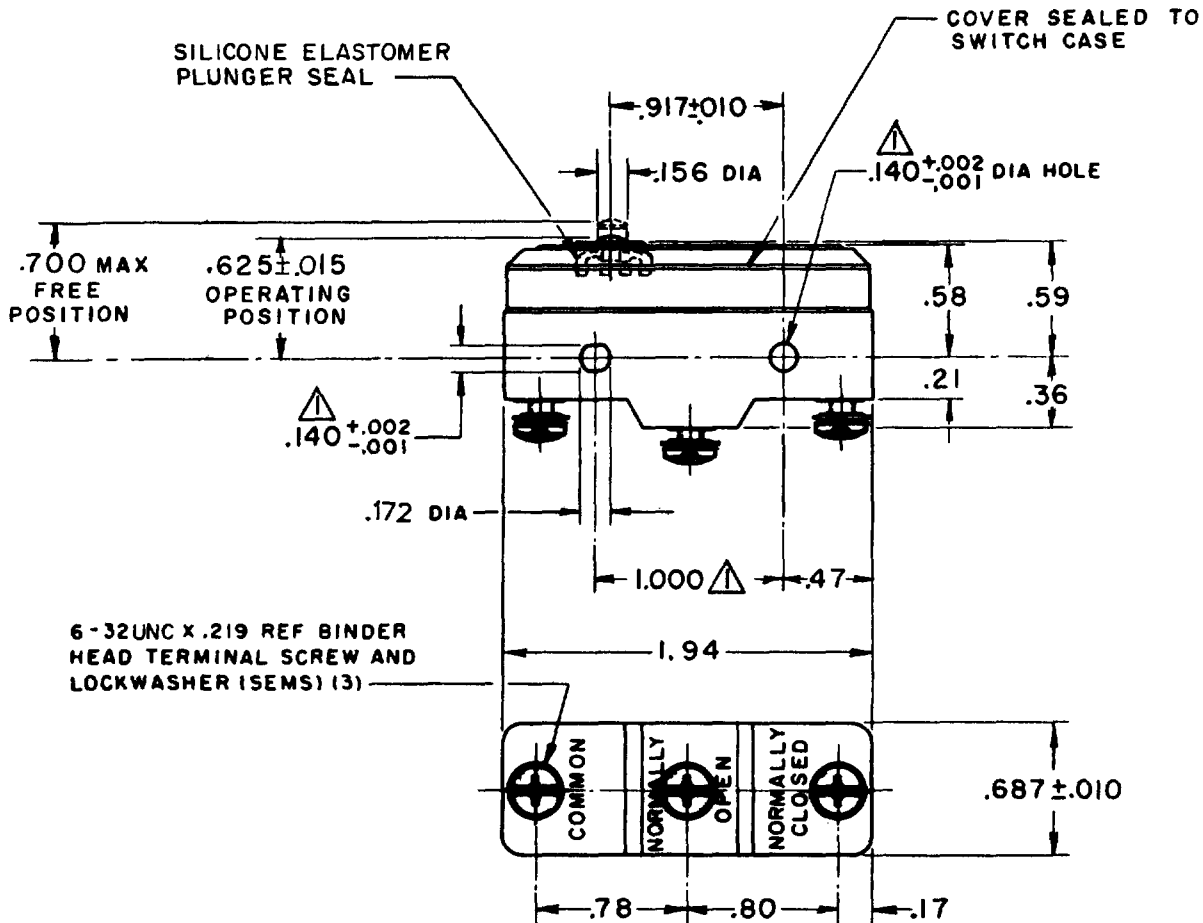


### NOTES

- ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ± .002 CENTERS
- 2-SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



### CHARACTERISTICS

OPERATING FORCE — — — 9-15 OZ  
RELEASE FORCE — — — 4 OZ MIN  
DIFFERENTIAL TRAVEL — .0004-.0025  
OVERTRAVEL — — — .005 MIN

### ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T

10A 125, 250 OR 480 VAC  
1/2 A 125 VDC, 1/4 A 250 VDC

L9

UL SP CE -L 288-

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES  
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

|              | DIM.<br>mm | TOL.<br>mm/in | DIM.<br>in | TOL.<br>mm/in |
|--------------|------------|---------------|------------|---------------|
| NO PLACES    | X          | 1/64          | X          | 0.001         |
| ONE PLACE    | X, X       | 0.4/0.16      | X, X       | 0.001/0.016   |
| TWO PLACES   | X, X, X    | 0.15/0.006    | X, X, X    | 0.001/0.016   |
| THREE PLACES | X, X, X, X |               | X, X, X, X | 0.001/0.016   |
| ANGLES       |            |               |            |               |

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .063 LB

FORMTEK

DRAWN

T M M

16 DEC 77