

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91829

SWITCH - BASIC

CATALOG LISTING

BZ-2R5551-P4

BZ-2R5551-P4

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-1896

DRAWING NUMBER

6

ISSUE

REVISIONS

A	C067209	J A P	3 MAY 90
B	73287-6	J A P	20 OCT 92
C	CO-75367B	K D R	3 MAR 94
D	CO-77863	G J W	2 MAY 96
E	C093346	D L T	4 SEP 98

CHECK

71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71


3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

3 JUN 71

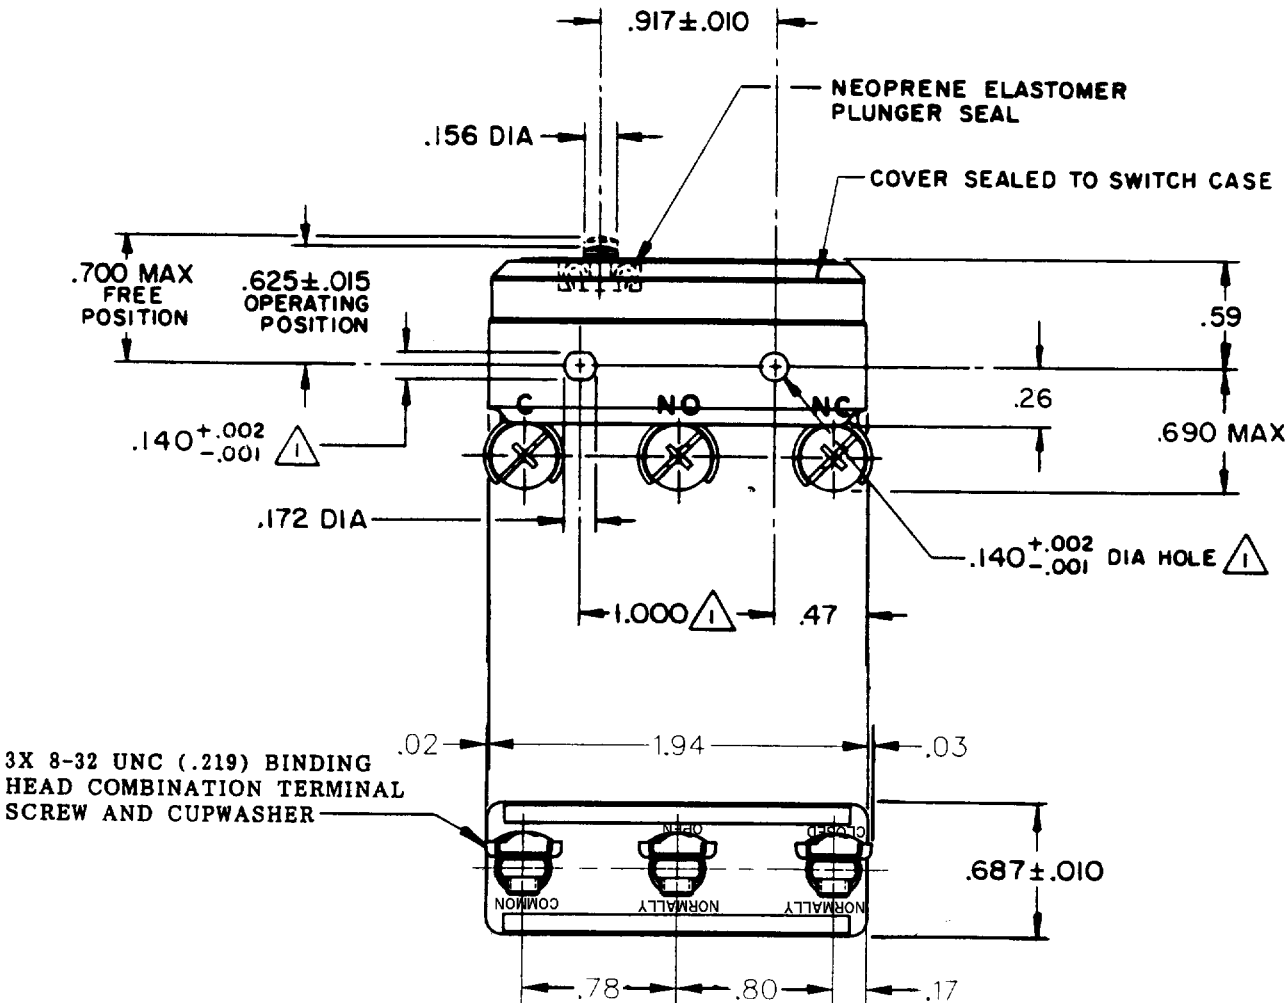

NOTE

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 8-15 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .0004-.0020
OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE Ⓢ A Ⓢ
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.01) ± .030
TWO PLACE (.001) ± .018
THREE PLACE (.0001) ± .008
ANGLES 1/2°

WEIGHT .066 LB

FORMTEK

D-50378-1A

DRAWN

OMW 3 JUN 71