



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91829

SWITCH-BASIC

CATALOG LISTING

BZ-2R72-A2

AGQ7000 AND JG 05920

BZ-2R72-A2
PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO.

CHECK

07OCT05

RJ

CHECK

21 MAR 69
Z1 MAR 69
DAW

CHECK

16 MAR 64

W L K

DAW

CHECK

16 MAR 64

W L K

REVISIONS

A CO 15200

W L K 16 MAR 64

B CO31576

23 JAN 73

C CO-59885

T R F 27 MAY 68

D CO-73287-1

J A L 22 NOV 93

E CO-77589

K D R 29 MAR 94

F CO93346

DLT 18 AUG 98


G 0015540

KSR 07OCT05

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS
2 - CONTACT MATERIAL - GOLD ALLOY

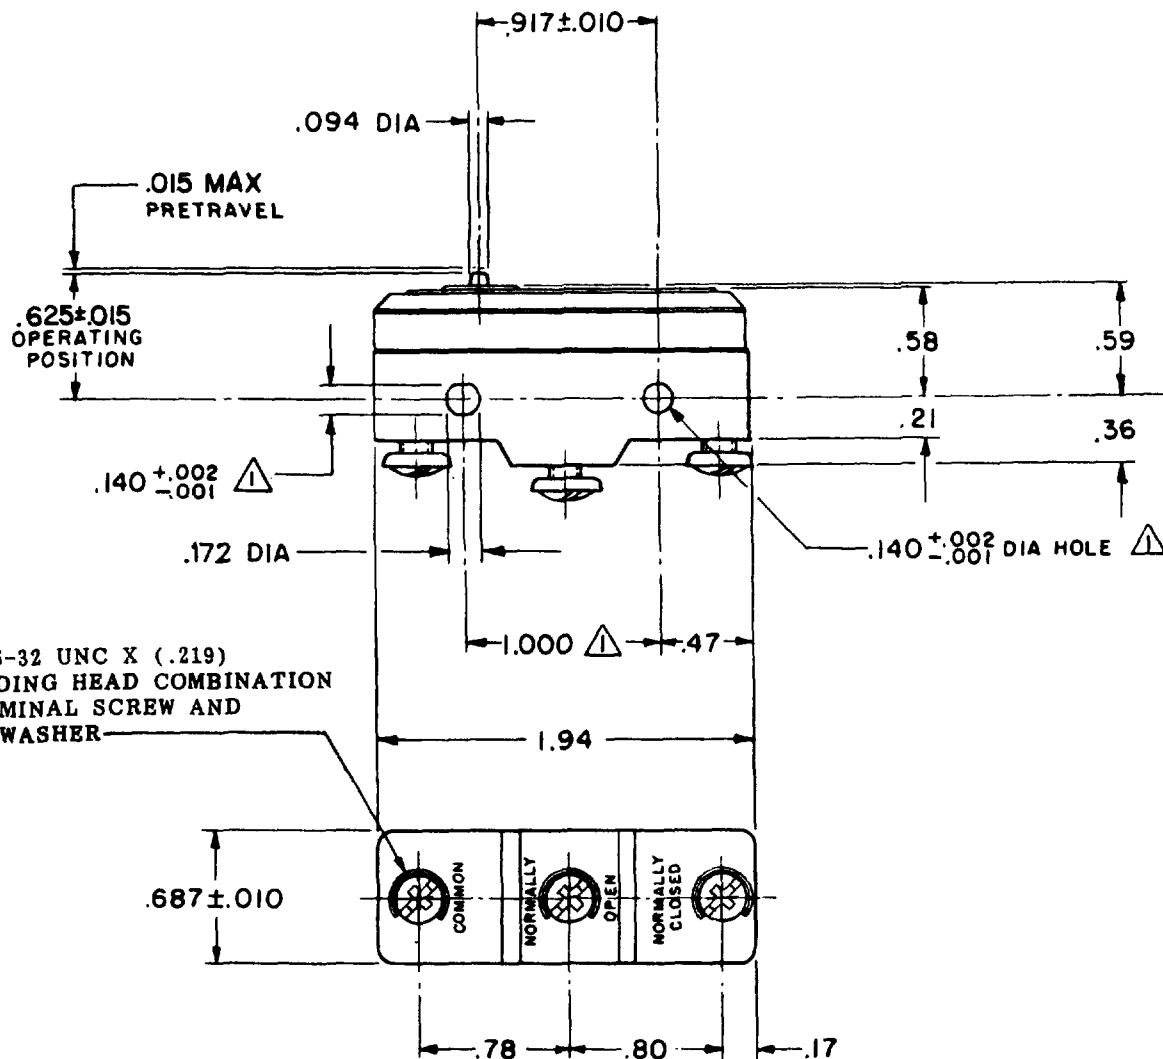

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 9-13 OZ

RELEASE FORCE - - - - - 4 OZ MIN

DIFFERENTIAL TRAVEL - - - .0004 - .0020

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L22-

1A - 125 VAC

-L288-

-L315-

-L307-



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .060 LB

FO-80376

DRAWN