

MICRO SWITCH
a Honeywell Division


FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2R725551

AGT1989

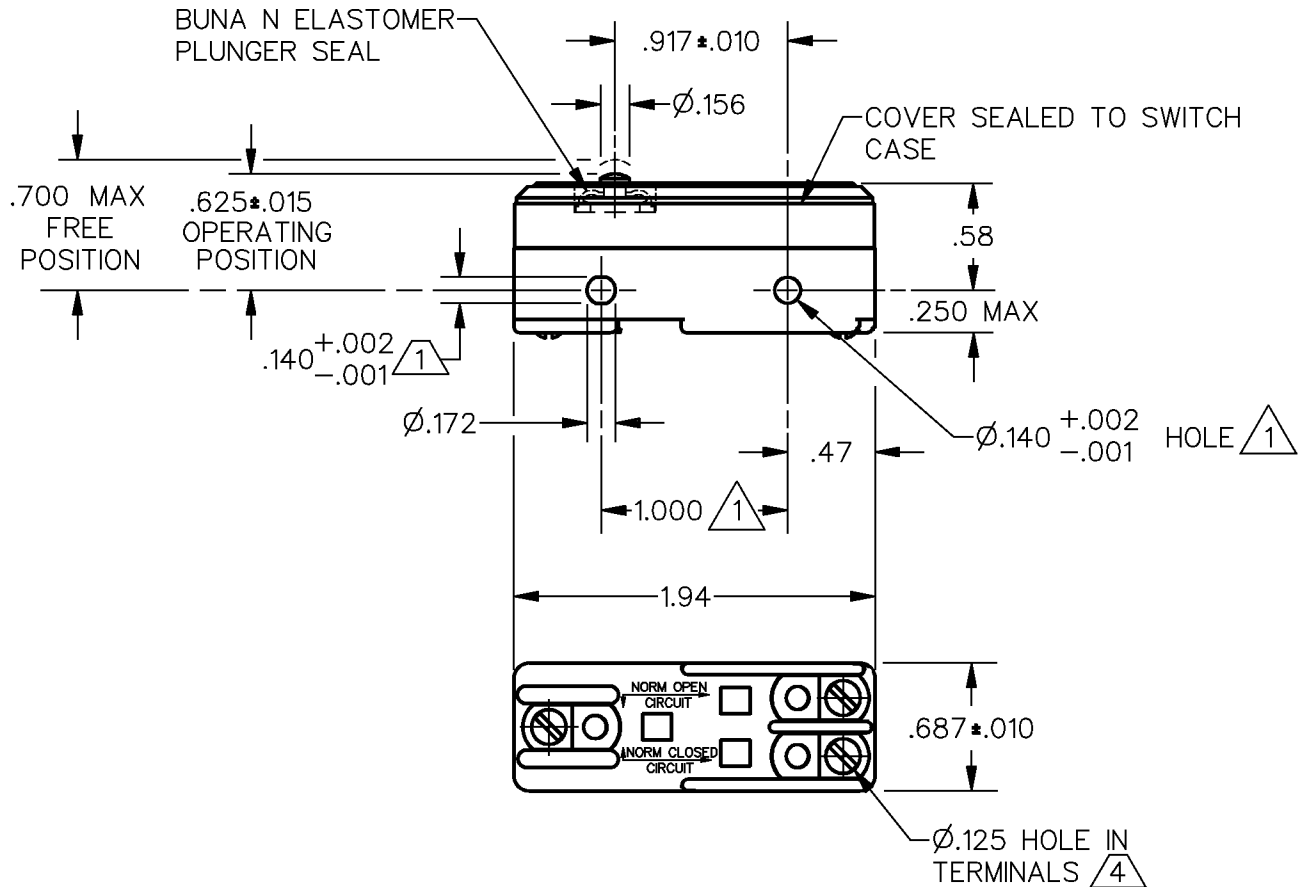


NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY
- 4 TERMINALS FORMED 15° REF TO BOTTOM OF SWITCH

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 9 — 15 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — — 4 OZ MIN	L22	ONE PLACE (.0)	± .030	
DIFFERENTIAL TRAVEL — .0004 — .0025	L288	TWO PLACE (.00)	± .015	
OVERTRAVEL — — — — .005 MIN	L315 1A 125 VAC	THREE PLACE (.000)	± .005	
	L307 1A 250V ~ T85 25E3	ANGLES	±	
	   	WEIGHT	.053 LB	

REVISIONS

A	CO-93074	C C K
15	JUN 98	
B	CO-94212-C	D L T
14	SEP 99	
C	0015540	K S R
07	OCT 05	

CHECK

07OCT05

RJ

CHECK

1 NOV 94

T S M

RASTER

DRAWN