

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91829

**SWITCH - BASIC**

CATALOG LISTING

**BZ-2RD-A2**

AHD1000

**BZ-2RD-A2**

PAGE 1 OF 1

**M**DRAWING  
NUMBER

7

ISSUE

REPLACES

RELEASE NO.

CHECK

## REVISIONS

A C017410

6 CH

15 MAY 63

B C0-

73287-B

D H D

17 MAY 93

C C0-

77589

K D R

29 MAR 94

D C093346

DLT

8 SEP 98

E 0015139

TSG

23 AUG 05

CHECK

23 AUG 05

RJ

RJ

CHECK

CHECK

17 JUN 63

L.S.D

CHECK


15 MAY 63

G C H

FORMTEK

FO-50378

DRAWN

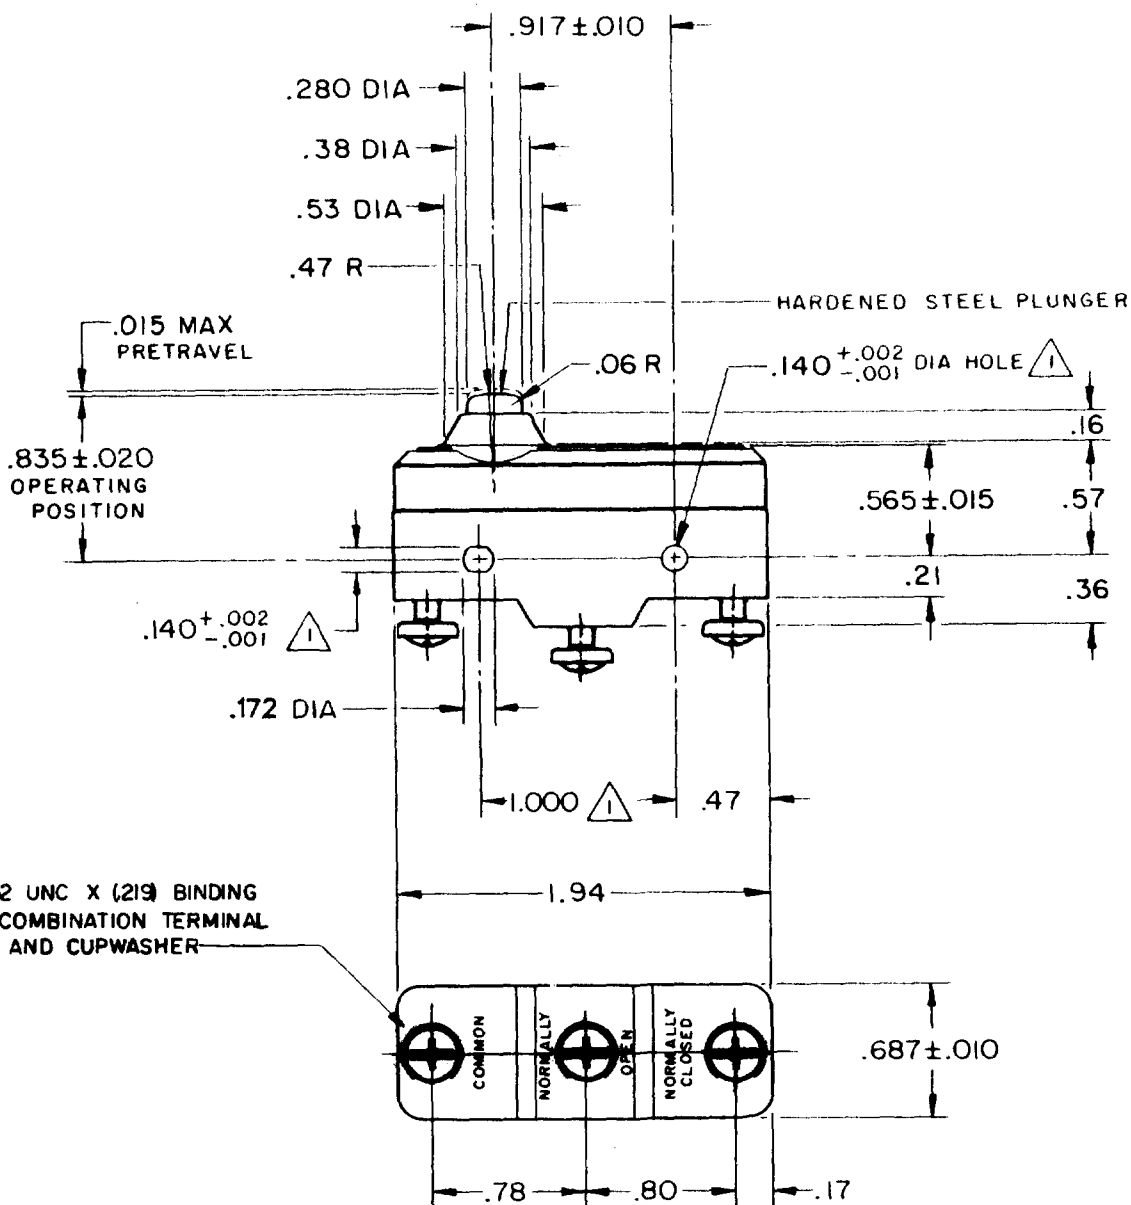

## NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**CHARACTERISTICS**

OPERATING FORCE ----- 9-13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .0004-.0020

OVERTRAVEL ----- .060 MIN

**ELECTRICAL DATA**CONTACT ARRANGEMENT  
S P D T

L96

15A 125, 250 OR 480 VAC  
1/8HP 125 VAC, 1/4HP 250 VAC  
1/2A 125 VDC, 1/4A 250 VDC-L288-  
-L306-  
-L315-EN 05  
EC

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE  
NOTEDDIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.015  
THREE PLACE (.000) ±.005  
ANGLES ±

WEIGHT .064 LB