

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RD23-A2**BZ-2RD23-A2**

PAGE 1 OF 1

MDRAWING
NUMBER

5

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO17410
6	CH
5	NOV 94
B	CO-73287-J
22	NOV 93
C	CO-77589
30	MAR 94
D	CO93346
DLT	8 SEP 98

CHECK

DRAW

NOV 94

DRAW

CHECK


NOV 94

DRAW

NOV 94

FORMTEK

FO-50376

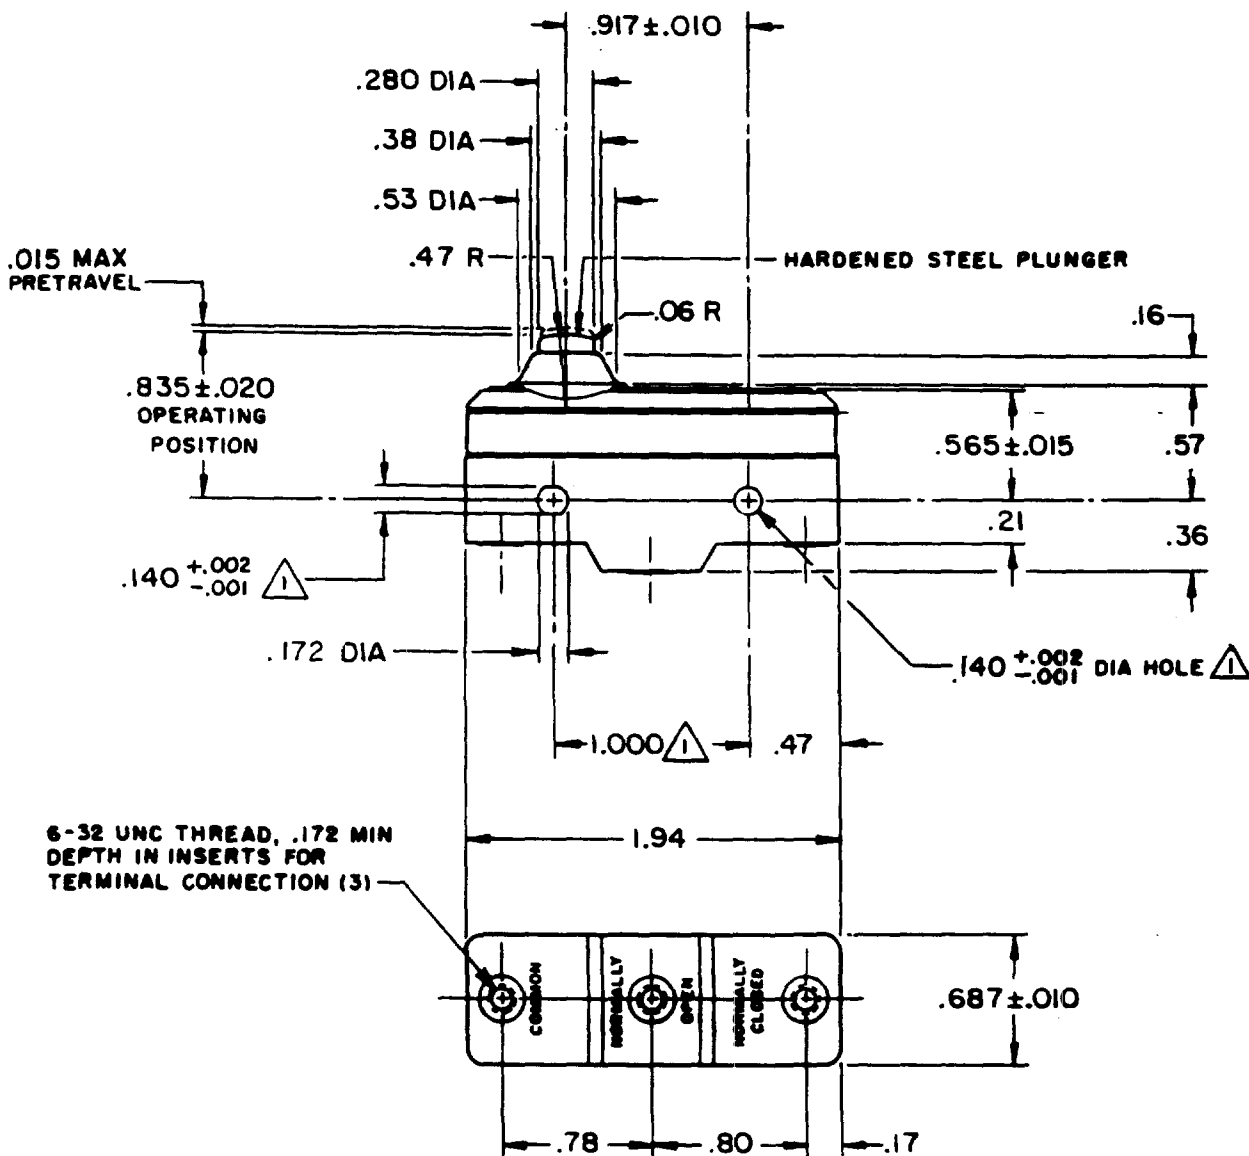

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - 6-32 UNC X .219 REF BINDING HEAD COMBINATION TERMINAL SCREW (3), AND CUPWASHER (3), FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ---- .0004 - .0020

OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .063 LB