

SWITCH-BASIC

CATALOG LISTING
BZ-2RD24-A2

AHE4500

BZ-2RD24-A2

PAGE 1 OF 1

REPLACES

RELEASE NO PR-1009

12SEP07

PSR

CHECK

18 DEC 69

RFS

CHECK

21 MAR 64

21 MAR 64

21 MAR 64

21 MAR 64

21 MAR 64

21 MAR 64

21 MAR 64

M


DRAWING
NUMBER

9

ISSUE

REVISIONS

A	CO	18 200
B	CO	16 785
C	CH	16 785
D	PR-1009	
E	CO	73287-J
F	CO	77588
G	CO	0018685
H	CO	0033748
I	CO	0033748
J	CO	0033748
K	CO	0033748
L	CO	0033748
M	CO	0033748
N	CO	0033748
O	CO	0033748
P	CO	0033748
Q	CO	0033748
R	CO	0033748
S	CO	0033748
T	CO	0033748
U	CO	0033748
V	CO	0033748
W	CO	0033748
X	CO	0033748
Y	CO	0033748
Z	CO	0033748

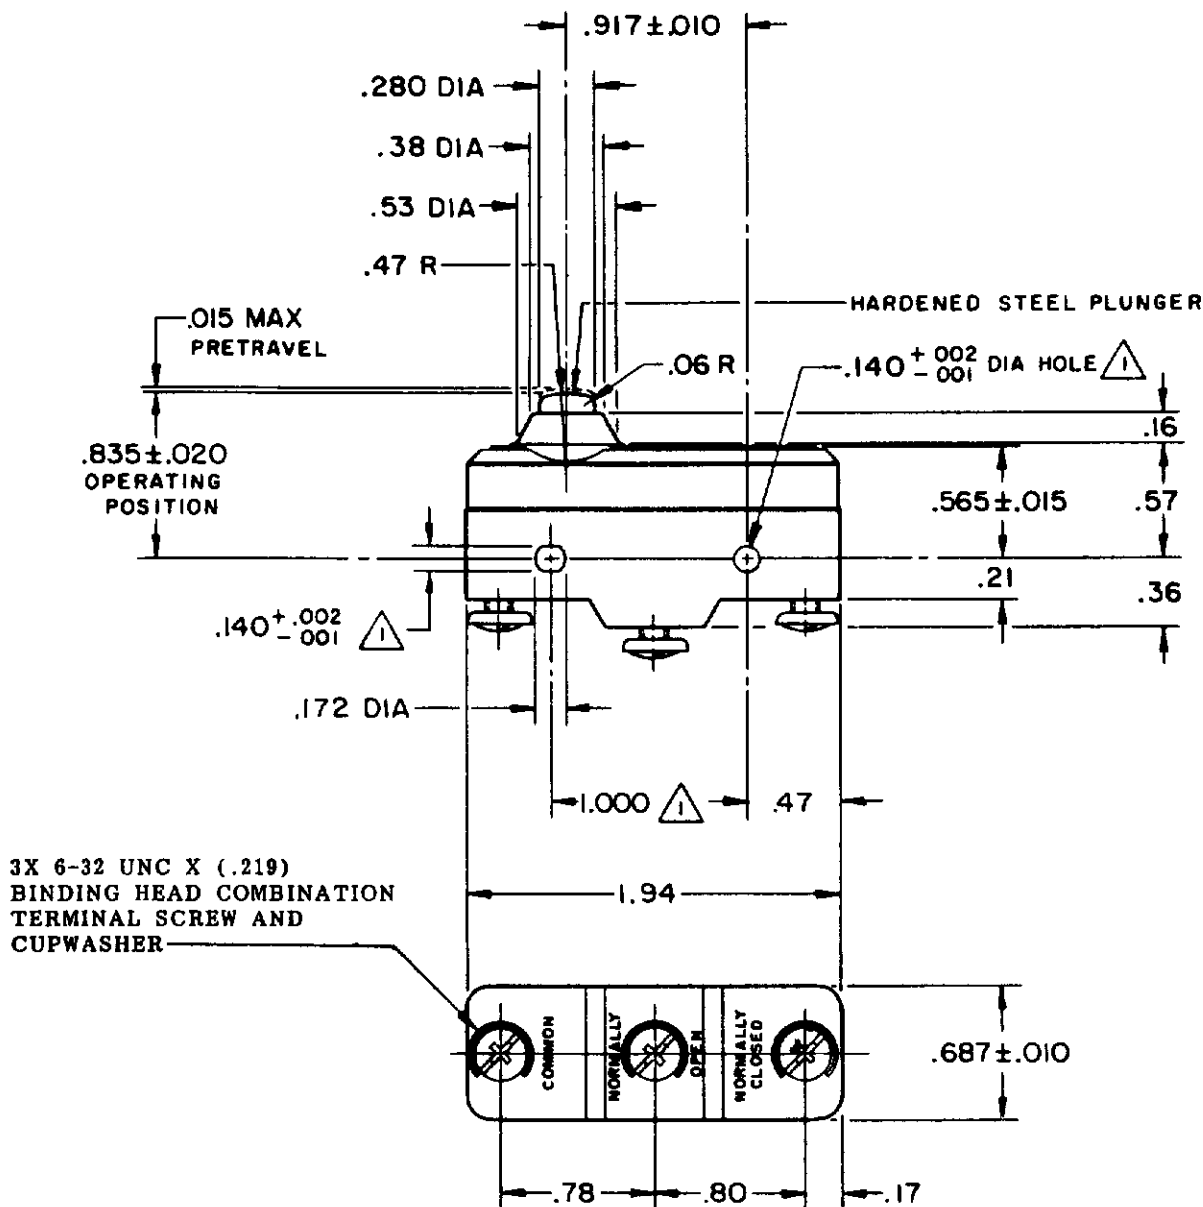

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTES

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS
- 2-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9-13 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL ----- .0004-.0020
OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
-L96- 15A-125, 250, OR 480 VAC
1/2 A-125 VDC, 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC
-L288-
-L315-
-L306-
-L310-
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .063 LB

RASTER

FO-90378

DRAWN

CHECK

21 MAR 64

21 MAR 64

21 MAR 64