


CATALOG LISTING
BZ-2RD44-PC2
PAGE 1 OF 1
M
1
ISSUE
REVISIONS
DRAWN
DLT
12 JUL 99
CHECK
JAF
12 JUL 99
CHECK
JAF
12 JUL 99
FORMTEK

CATALOG LISTING
BZ-2RD44-PC2
X112385-BZ
REPLACES
PR-24143
RELEASE NO.
CHECK
CHECK
CHECK

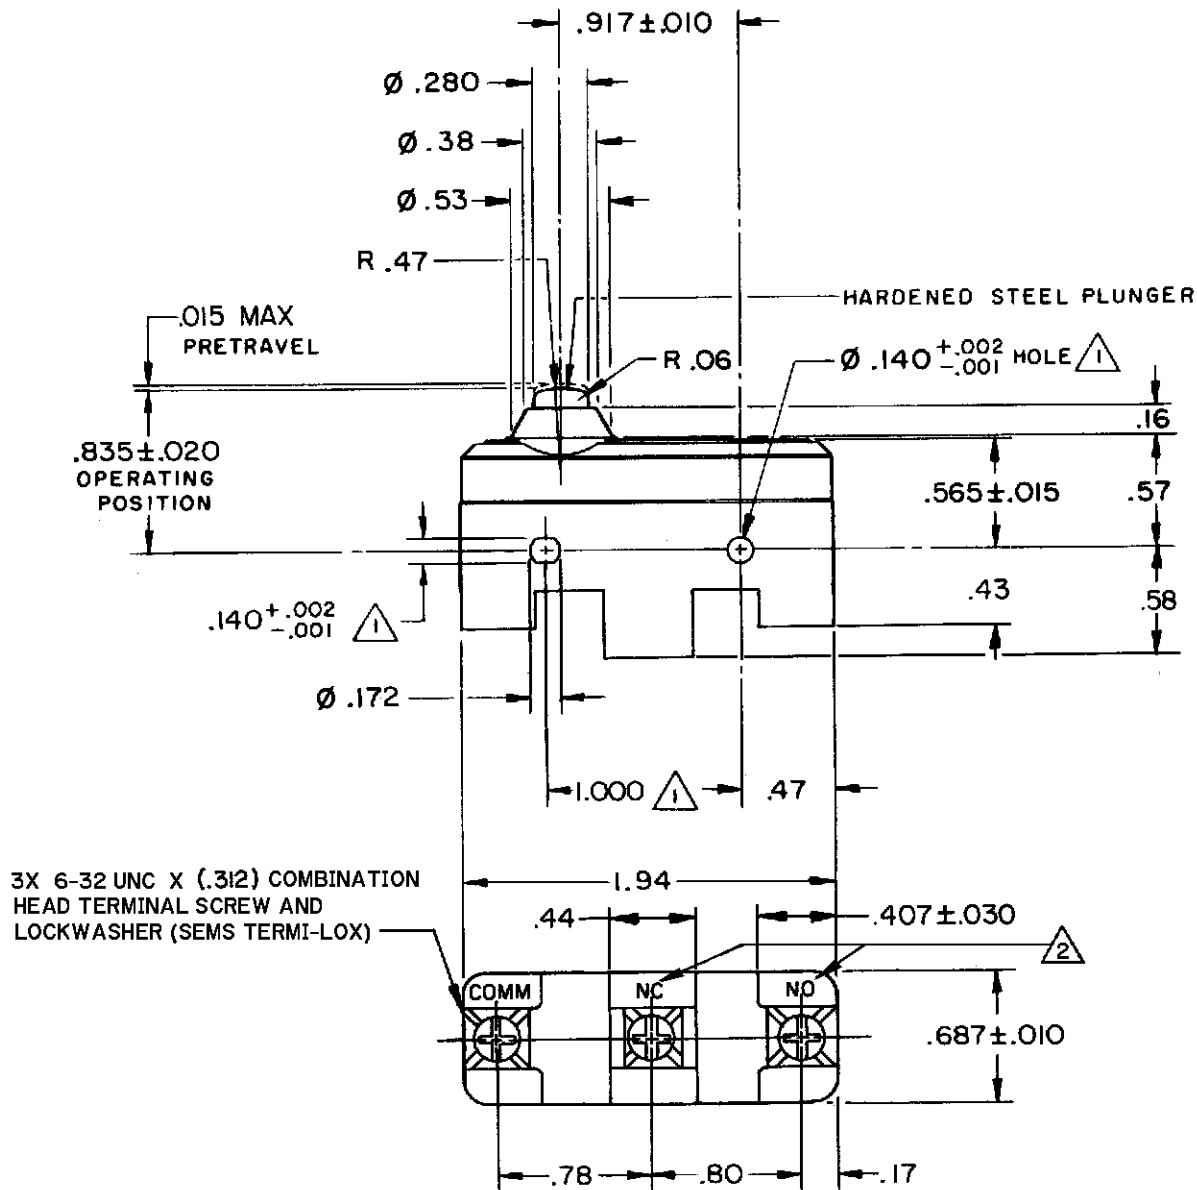


- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
 - 2 SPECIAL TERMINAL DESIGNATION (NC AND NO REVERSED)

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 9 - 13 OZ
RELEASE FORCE - - - - - 4 OZ MIN
DIFFERENTIAL TRAVEL - - -.0004-.0020
OVERTRAVEL - - - - - .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15A-125, 250 OR 480 VAC, 2A-600 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC
CODE L74
L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT .064 LB