

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**SWITCH - BASIC**

CATALOG LISTING

**BZ-2RD45****AHE4686**CATALOG LISTING  
**BZ-2RD45**  
PAGE 1 OF 1**M**ISSUE  
**4**

## REVISIONS

|   |           |         |
|---|-----------|---------|
| A | CO-96055  | 30SEP05 |
|   | G J W     |         |
|   | 28 MAR 00 |         |
| B | 201106    | 30SEP05 |
|   | C S L     |         |
|   | 18 AUG 00 |         |
| C | 0015539   | VA      |
|   | BM        |         |
|   | 30SEP05   |         |

REPLACES X112191-BZ

RELEASE NO. PR-24158

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

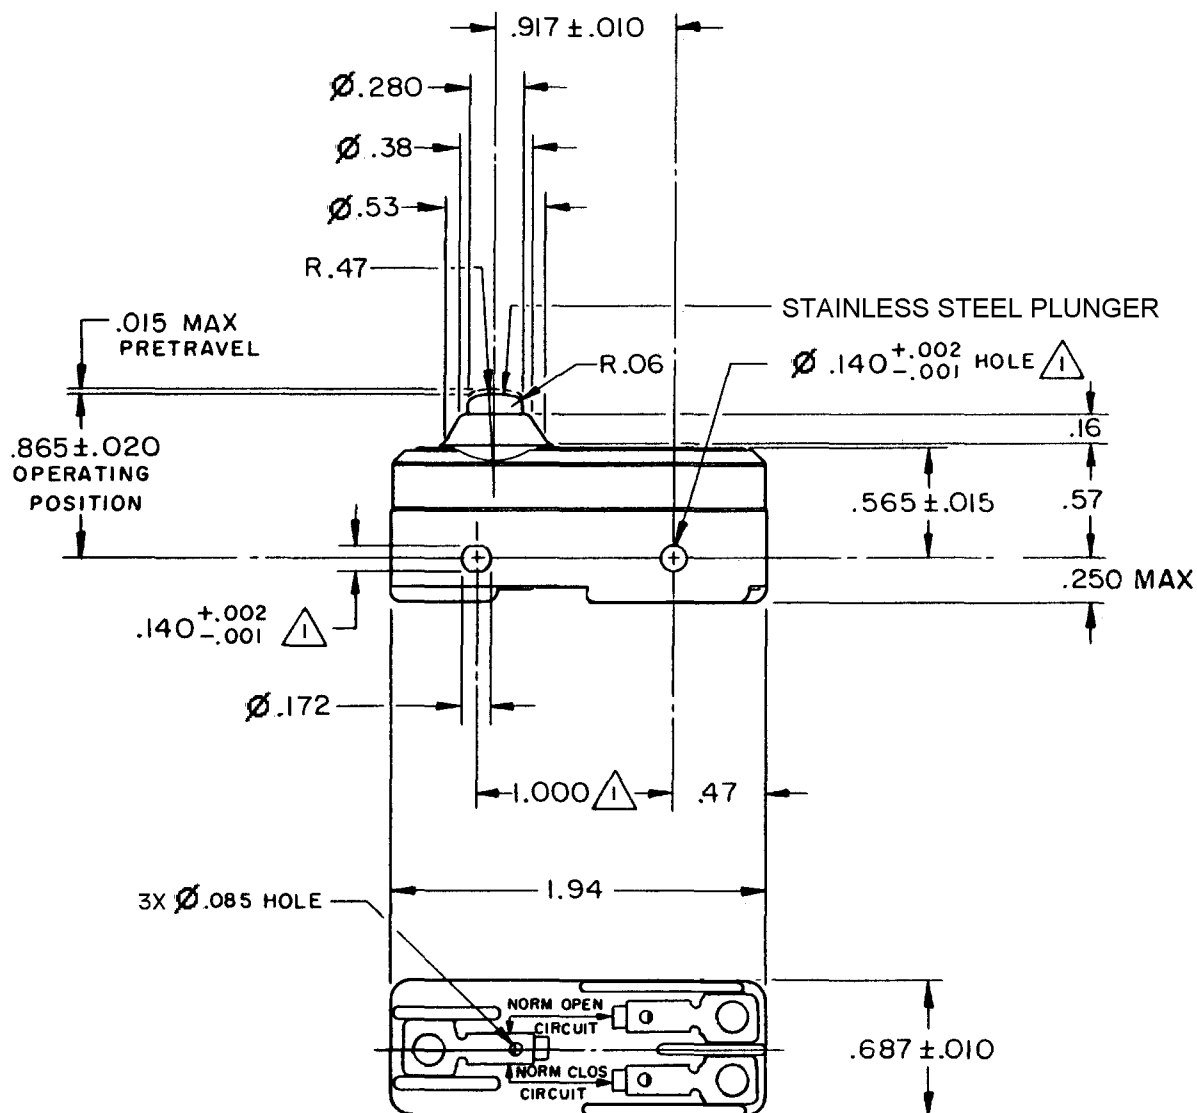

NOTE  
△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
OF Ø.139 MAX ON 1.000 ± .002 CENTERS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**CHARACTERISTICS**

OPERATING FORCE ----- 9 - 13 OZ  
RELEASE FORCE ----- 4 OZ MIN  
DIFFERENTIAL TRAVEL ----- .0004 - .0020  
OVERTRAVEL ----- .060 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
S P D T

15A - 125, 250 OR 480 VAC, 2A - 600 VAC  
-L74- 1/8HP - 125 VAC; 1/4HP - 250 VAC  
-L315- 1/2A - 125 VDC; 1/4A - 250 VDC  
-L288-  
-L306-  
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE  
NOTED  
DIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**  
ONE PLACE (.0) ± .030  
TWO PLACE (.00) ± .015  
THREE PLACE (.000) ± .005  
ANGLES ±

WEIGHT .051 LB

RASTER

FO-50378

DRAWN

JAH

28JUL99

CHECK

JAF

28JUL99

CHECK

CHECK

VA

30SEP05

G J W

28 MAR 00

30SEP05

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK