

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RD72-A2

AHE5189

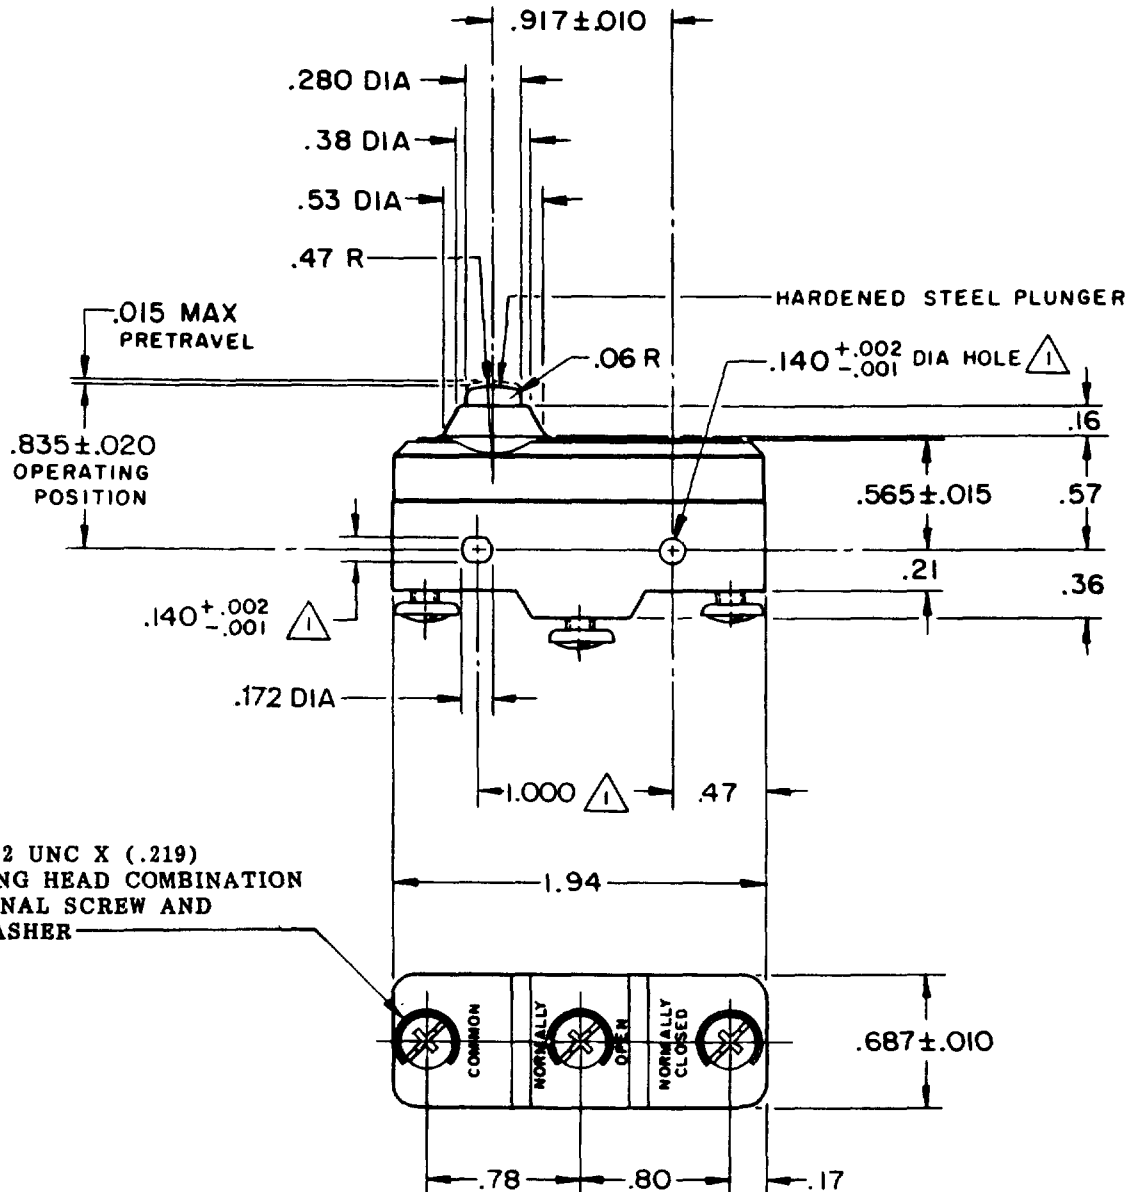

NOTES

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2 CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 - 13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ----- .0004 - .0020

OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L22-

1A - 125 VAC

-L288-

-L315-

-L307-

CE SP RL 05

1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ± .005

WEIGHT .064 LB

BZ-2RD72-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REPLACES

RELEASE NO. PR-1010

07OCT05

RJ

CHECK

70

20JAN 70

CNT

70

CHECK

70

23JAN 70

DAW

CHECK

69

18 DEC 69

GCH

RASTER

FO-50378-1A