

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RDS725551-A2

AHR1000

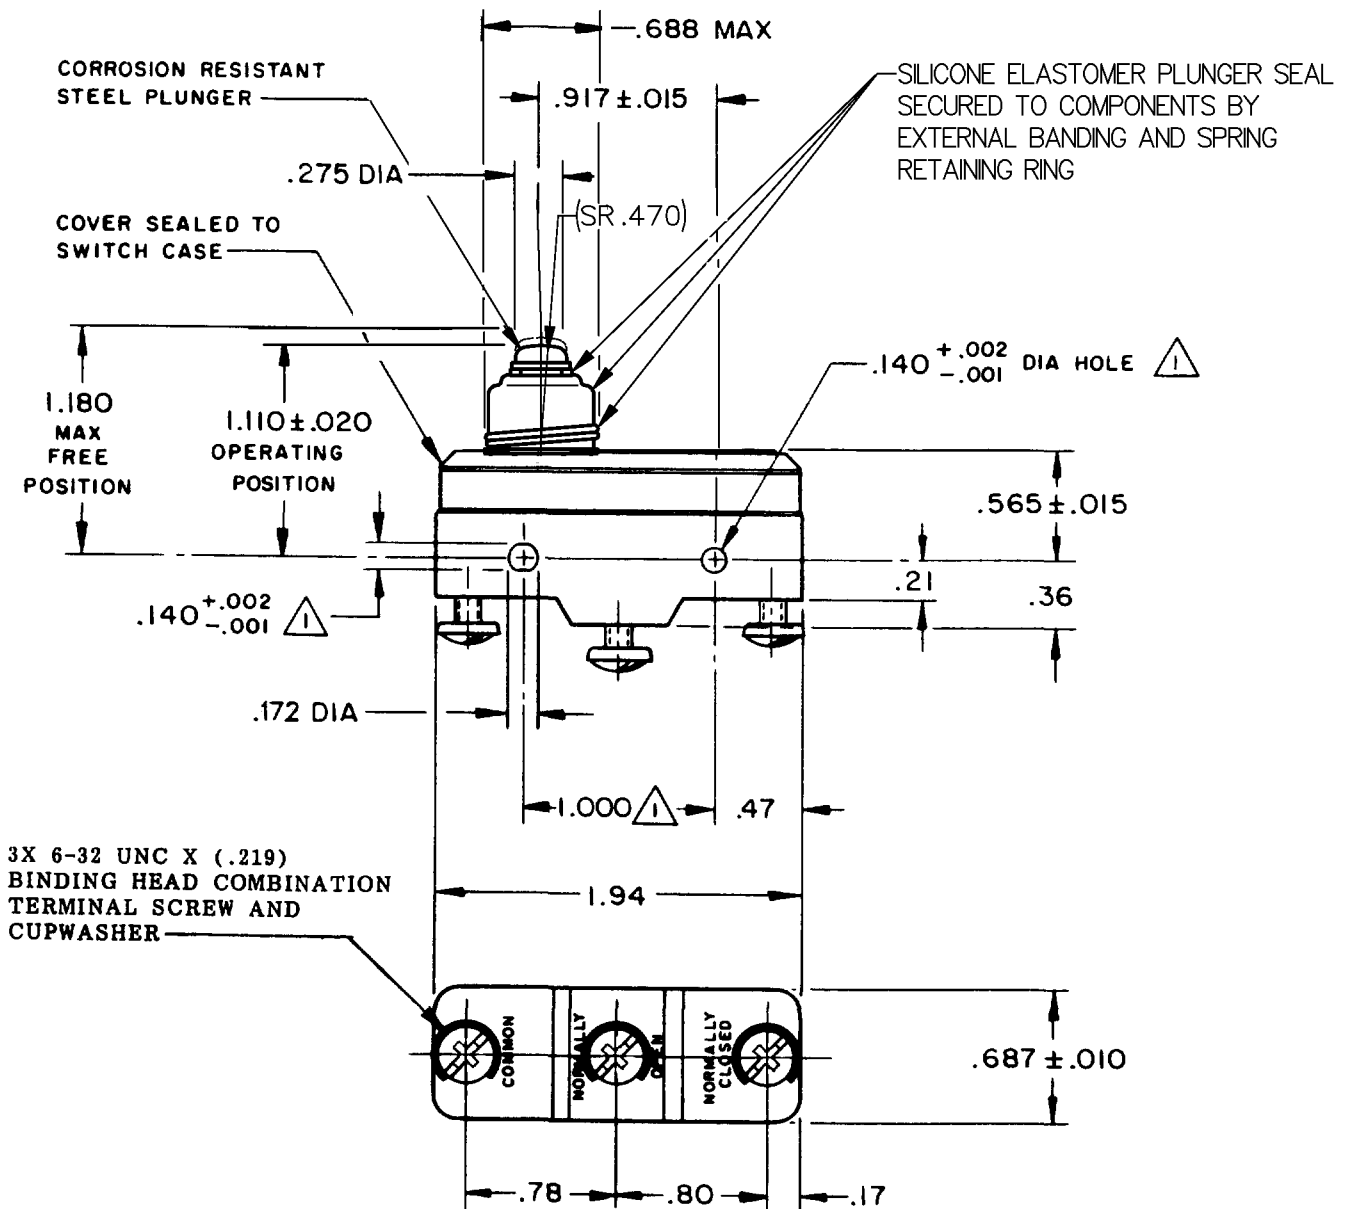

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 13-19 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	L22 1A 125 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .0004-.0025	L288 L315 L307	TOLERANCES ARE:
OVERTRAVEL ----- .060 MIN	CE 05 RJ SP 1A 250V ~ T85 25E3	ONE PLACE (.0) ± .030 TWO PLACE (.001) ± .015 THREE PLACE (.000) ± .005 ANGLES
		WEIGHT .085 LB

M BZ-2RDS725551-A2

DRAWING
NUMBER

9

ISSUE

REPLACES

RELEASE NO. PR - 1012

07OCT05

RJ

CHECK

REVISIONS

A	C031576	JAH	23 JAN 73
B	C067209	JAP	3 MAY 90
C	C071458	JAP	21 NOV 91
D	C073287-J	JAL	22 NOV 93
E	C077589	KDR	29 MAR 94
F	C083108	GJW	10 JUN 96
G	C093346	DLT	19 AUG 98
H	0015540	KSR	07OCT05

RASTER

DRAWN

CHECK

6 DEC 69