


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING


BZ-2RDST-S

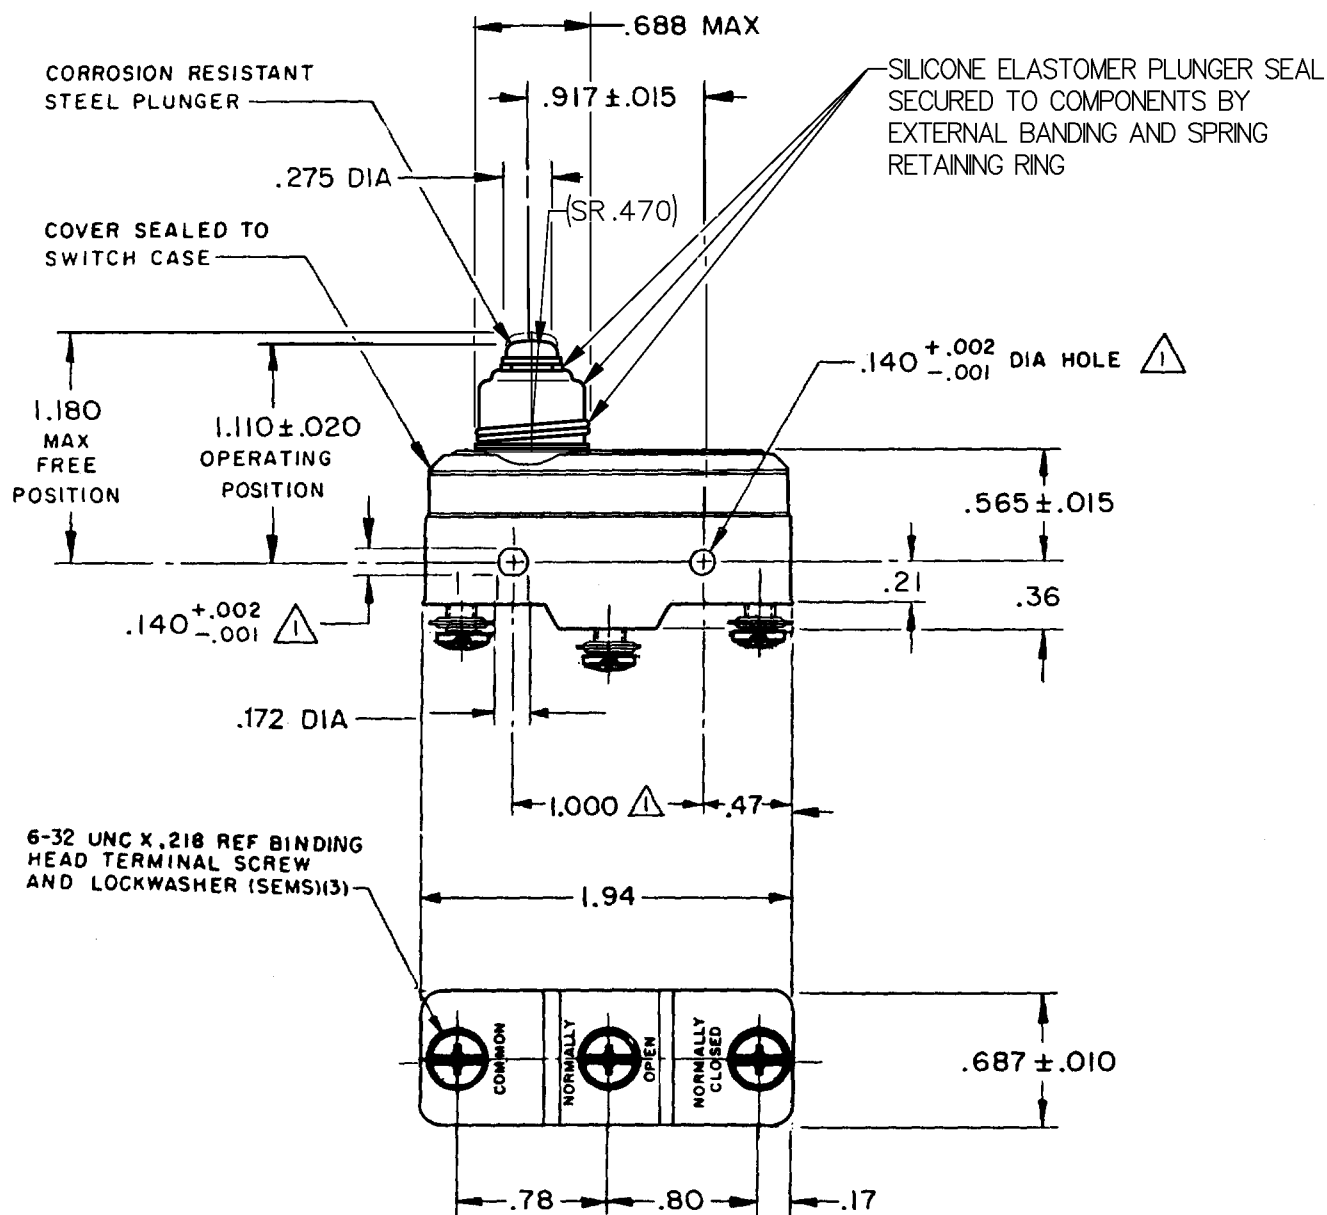

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

OPERATING FORCE — — — 13-19 OZ
RELEASE FORCE — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — .0004-.0025
OVERTRAVEL — — — .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306
CE D RU
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X X
ONE PLACE	X,X	0.4/016	X X
TWO PLACES	X,X,X	0.15/006	X X,X
THREE PLACES	X,X,X,X		X X,X,X
ANGLES			

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT .078 LB

BZ-2RDST-S

PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REVISIONS

A	CO	39621
	T M M	16 DEC 77
B	CO	67209
	J A P	3 MAY 90
C	CO	68351-D
	J W B	18 JUL 91
D	CO	71458
	J A L	21 NOV 91
E	CO	77588
	K D R	29 MAR 94
F	CO	83108
	G J W	10 JUN 96
G	CO	93346
	D L T	8 SEP 98

FORMTEK

DRAWN

REPLACES

RELEASE NO. PR-6725

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK