

**MICRO SWITCH**FREEPORT ILLINOIS
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - 2RL - P4**AJH5000****BZ - 2RL - P4**

PAGE 1 OF 1

MDRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO18851	18 JAN 06
B	CO-753678	20 OCT 92
C	CO-753678	3 MAR 94
D	CO-77863	3 MAY 96
E	CO93346	9 SEP 98
F	0018004	18 JAN 06

18 JAN 06

RJ

CHECK

23 APR 63

DAW

CHECK


8 MARCH 63

GCH

FORMTEK

FO-80378

DRAWN

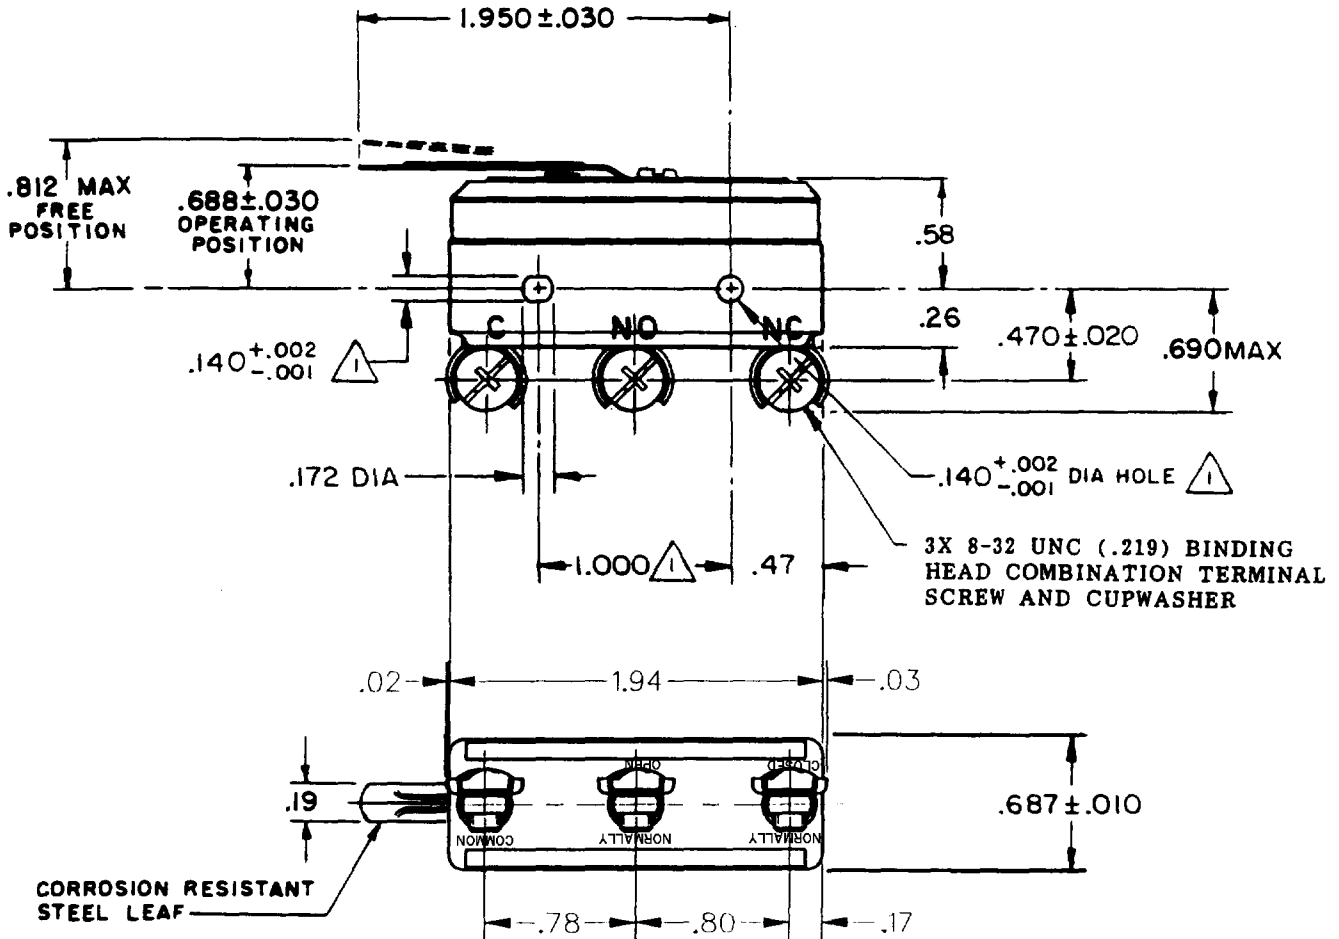

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5 OZ MAX

RELEASE FORCE ----- 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .050 MAX

DO NOT OVERTRAVEL MORE THAN ----- .062

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

-L96-

15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC, 1/4 HP - 250 VAC-L288-
-L306-
-L315-

CE 16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT .063 LB